

Fujikura 70S+

NEW

Connecting the Future


**Core-to-Core
Alignment
Splicing 6sec
Tube-heating 9sec**



Single Fiber Fusion Splicer

Fujikura 70S+

Core-to-Core alignment, Dual-axis observation system

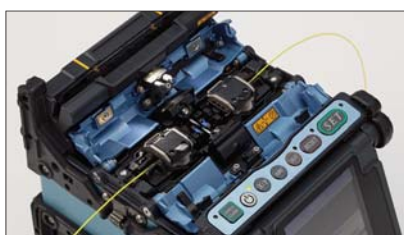

- Automated Wind-Protector
- Minimum manual operation, Splice in 4 steps
- Multi-functional carrying case with integrated work station
- Absolute robustness
- Bluetooth capability connection



 **Fujikura**

Fujikura 70S+

SPECIFICATIONS

Applicable fibers	Single / SMF (G.652/657), MMF (G.651), DSF (G.653), NZDSF (G.655)
Cladding dia. / Sheath dia.	80-150μm / 100-3000μm
Cleave length	5mm to 16mm with sheath clamp
Splice mode / heating mode	Total 100 splice modes / 30 heating modes
Typical splice loss	0.02dB (SM), 0.01dB (MM), 0.04dB (DSF) and 0.04dB (NZDS) Measured by cut-back method relevant to ITU-T and IEC standards.
Return loss	>>60dB
Attenuation splice function	Intentional high splice loss of 0.1dB to 15dB (0.1dB step) can be made for an in-line fixed attenuator.
Typical splice time	6sec ULTRA FAST 7sec SM FAST, 10sec SM AUTO
Typical tube heating time	13sec FP-03, coating dia.250μm 14sec FP-03, coating dia.900μm 9sec Slim 60mm ,coating dia.250μm
Splice result storage	Last 20,000 splices
Viewing methods / magnification	2 axis CMOS camera with 4.73" color LCD. X / Y (320X magnification), or both X and Y simultaneously (200X magnification)
Tension test	1.96 to 2.25N
Applicable protection sleeve	60mm, 40mm and Fujikura micro sleeves
No. of splice / heating per battery full charge*1	Typical 200 cycles with BTR-09
Electrode life	5000 splices
Wireless connectivity	Wireless technical standard : Bluetooth*4.1*3 OS : Android 5.0 or above, ios 8.0 or above (iphone6 above)
Size / weight	146W x 159D x 150H (mm) / 2.7kg (including battery)
Operating condition	Altitude : 0 to 5,000m above sea level, Wind : 15m/sec Temperature : -10 to 50deg C, Humidity : 0 to 95%RH, non-dew
Resistance features*2	Shock : 76cm (30inch) all surface drop Dust : Exposure to dust (0.1 to 500μm dia Alumina Silicate), IP5X Rain : H=10mm/hr for 10min, IPX2
Other features	PC software upgrade / data management
Terminals	USB 2.0 (Mini-B type) connector for PC communication. 6-pin Mini-DIN connector for RS02 or RS03 power supply.

*1:one(1) splicing and heating cycle per two(2) min. under room temperature condition.

*2:Carried out in Fujikura labs in Japan. The shock, dust and rain resistance test do not guarantee the product will not be damaged under these conditions.

*3:The Bluetooth wireless connection of this product is not guaranteed to work with all smartphones or other devices.

*The values shown above are typical values, varying by condition and environment.

Bluetooth and Bluetooth logo is a registered trademark of Bluetooth SIG, Inc.



ACCESSORIES

Description	Model No.
High precision single fiber cleaver	CT08 (for single fiber)
High precision fiber cleaver	CT50 (for single to 12 ribbon fibers)
Thermal jacket stripper	RS02, RS03
Protection sleeve	FP-03 / 03 (L=40) and FPS01series

OPTIONAL ITEMS

Description	Model No.	SET
Fiber holder	FH-60-250 (coating dia. 250μm)	1pair
	FH-60-900 (coating dia. 900μm)	1pair
	FH-60-DC250 (coating dia. of 250μm in drop cable)	1pair
	FH-FC-20 (coating dia. of 900μm in 2.0mm Sheath dia.)	1pc
	FH-FC-30 (coating dia. of 900μm in 3.0mm Sheath dia.)	1pair
	FH-60-LT900 (900μm dia. loose buffer fiber)	1pair
Sheath clamp	CLAMP-S70C (included in standard package)	1pair
	CLAMP-S70D (900μm dia. loose buffer fiber)	1pair
Battery pack	BTR-09 (Li-ion)*3	1pc
Battery charge cord	DCC-18	1pc
DC power cord	DCC-12 (for cigar-socket)	1pc
	DCC-13 (with alligator clamp)	1pc
Electrodes	ELCT2-20A	1pair
J-plate	JP-06	1pc

*3:all senders must to obey the IATA regulation when transporting Li-ion battery by air.

STANDARD PACKAGE

Description	Model No.	Q'ty
Fusion splicer	70S+	1pc
AC adapter	ADC-18	1pc
AC power cord	ACC-XX XX=14 (JP/US),15 (EU),16 (UK),17 (AU)	1pc
Carrying case	CC-30	1pc
Spare electrodes	ELCT2-20A	1pair
Instruction manual CD	M-70+(Instruction Manual and PC software)	1pc
Quick reference guide	Q-70S+/19S+	1pc
Warning and cautions	W-70-E	1pc
USB cable	USB-01	1pc
Sleeve loader	SL-01	1pc
Alcohol pot	AP-01	1pc
Screw driver	SD-01	1pc

STANDARD PACKAGE



Please visit **NEW** web site!

<https://www.fusionsplicer.fujikura.com>



Facebook

<https://www.facebook.com/FujikuraFusionSplicers>



twitter

<https://twitter.com/fujikurasplicer>

Specifications and descriptions are subject to change without prior notice. ©2017 Fujikura Ltd.

Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan

Phone:+81-3-5606-1164 Fax:+81-3-5606-1534 <http://www.fujikura.com>

Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967
Phone:+65-6-278-8955 Fax:+65-6-278-0965 <http://www.fujikura.com.sg>

Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK
Phone:+44-20-8240-2000 Fax:+44-20-8240-2010 <http://www.fujikura.co.uk>

AFL

260, Parkway East, Duncan, SC29334, USA

Phone:+1-800-235-3423 Fax:+1-800-926-0007 <http://www.aflglobal.com>

Fujikura (China) Co., Ltd.

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai, 200120 CHINA
Phone:+86-21-6841-3636 FAX +86-21-6841-2070