


SST-Drop™ Indoor/Outdoor, Gel-Free Cable, Dielectric

1 F, ClearCurve® ZBL, Single-mode (OS2)

CORNING

Corning SST-Drop™ indoor/outdoor dielectric cables provide the simple installation offered by standard SST-Drop cables designed for rugged outdoor environments and compact drop cables designed for challenging indoor bend environments. The design features a gel-free, fully waterblocked, UV-resistant 2.9 mm riser-rated (OFNR) drop cable centered inside a traditional SST-Drop dielectric cable. Designed to meet industry-standard requirements for outdoor and indoor drop cables, the product eliminates the need for termination to transition from the outdoor environment to an indoor ONT. This dielectric version eliminates any bonding and grounding requirements and is suitable for aerial, direct buried and duct installation. A toneable version is also available.

The product is available in convenient contractor-sized packaging for easy field deployment and features bend-insensitive single-mode fiber, which enables installers to route the subunit around tight corners down to 5 mm (0.2 in) radius inside the home.

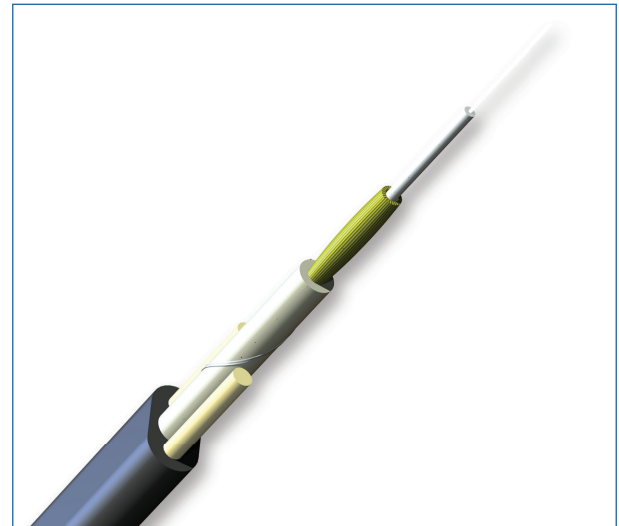

SST-Drop Indoor/Outdoor Cable | Photo PIM0185

Features and Benefits

2.9 mm OFNR FRNC/LSZH subunit in a rugged outdoor cable

Eliminates need for termination transition in indoor ONT

Crush resistance

Fiber protection and signal integrity

UV-resistant, flame-retardant inner jacket


Rugged, durable and easy to strip

Dielectric

Eliminates bonding and grounding requirements

Small subunit diameter and bend-radius

Easy installation in space-constrained areas

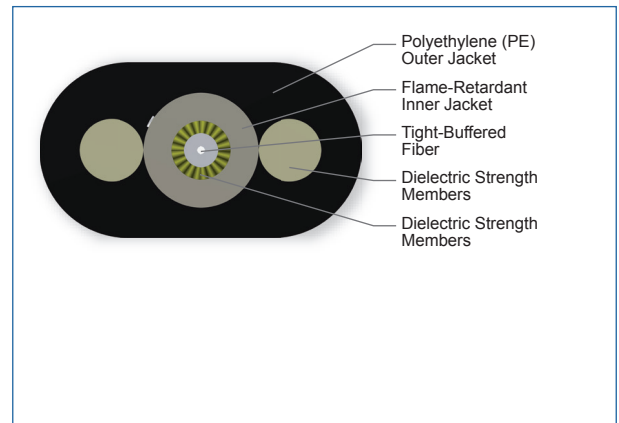

SST-Drop Indoor/Outdoor Cable | Photo PIM0184

Standards

Approvals and Listings Compact Drop Subunit listed to National Electrical Code® (NEC®) OFNR, FT-4

Design and Test Criteria ANSI/ICEA S-110-717, Telcordia GR-20-CORE, Telcordia GR-409-CORE

CORNING

SST-Drop™ Indoor/Outdoor, Gel-Free Cable, Dielectric

1 F, ClearCurve® ZBL, Single-mode (OS2)

CORNING

Specifications

General Specifications

Environment	Indoor/Outdoor
Application	Self-Supporting, Aerial, Direct Buried, Duct, (General Purpose Horizontal, Vertical Riser)
Cable Type	Drop
Fiber Category	ClearCurve® ZBL Single-mode (OS2)
Product Type	Self-Supporting

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Fiber Count	1
Tight Buffer Color	White
Subunit Diameter	2.9 mm
Subunit Color	Natural
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	1350 N (300 lbf)
Max. Tensile Strength, Long-Term	400 N (90 lbf)
Weight	32 kg/km (22 lb/1000 ft)
Nominal Outer Diameter	8.1 mm x 4.5 mm (0.32 in x 0.17 in)
Outer Cable Minimum Bend-Radius Operation	80 mm (3.15 in)
Inner Cable Minimum Bend-Radius Operation	5 mm (0.2 in)
Min. Bend Radius Operation	80 mm (3.15 in)

SST-Drop™ Indoor/Outdoor, Gel-Free Cable, Dielectric

1 F, ClearCurve® ZBL, Single-mode (OS2)



Maximum Span with One-Percent Installation Sag

Maximum Span with 1% Installation Sag, NESC Heavy	46 m (150 ft)
Maximum Span with 1% Installation Sag, NESC Medium	78 m (255 ft)
Maximum Span with 1% Installation Sag, NESC Light	101 m (330 ft)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	ClearCurve® ZBL
Fiber Category	G.657.B3/G.652.D
Fiber Code	U
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Typical Attenuation*	0.35 dB/km / 0.35 dB/km / 0.20 dB/km

* For more information on typical attenuation please see the Corning whitepaper at http://csmedia.corning.com/opcomm//Resource_Documents/whitepapers_r/ LAN-1863-AEN.pdf

Ordering Information

Part Number	001UB4-14101-F9
Product Description	SST-Drop™ Indoor/Outdoor, Gel-Free Cable, Dielectric, 1 F, ClearCurve® ZBL, Single-mode (OS2)
EAN Code	4056418148137

Shipping Information

Convenient Contractor-sized Packaging Length	609.6 m gross weight 72 lbs; no specialized equipment needed (2,000 ft gross weight 72 lbs; no specialized equipment needed)
Traditional Bulk Packaging	up to 5000 m typically require reel payoff equipment

SST-Drop™ Indoor/Outdoor, Gel-Free Cable, Dielectric

1 F, ClearCurve® ZBL, Single-mode (OS2)

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2017 Corning Optical Communications. All rights reserved.