

# SST-Drop™ FREEDM® LSZH Riser Cable

2 F, Single-mode (OS2)

CORNING

Corning FREEDM® LSZH™ flat-drop riser cables are flame-retardant, indoor/outdoor cables suitable for installation in aerial, duct and riser applications. FREEDM LSZH flat-drop riser cables provide the simple installation of standard FREEDM cable in an easy-access single-tube design. The small, lightweight tray-rated cables have been tested to meet mechanical and environmental conditions exceeding the requirements for traditional telecom cables. The cable jacket consists of a flame-retardant, non-halogenated, limited-smoke material that provides UV and chemical resistance. The all-dielectric design eliminates any bonding and grounding requirements. Compatible with industry-standard hardware and available in preconnectorized AnyLAN™ assemblies, FREEDM LSZH flat-drop riser cables are the perfect solution for indoor/outdoor drop applications. A drop cable access tool is also available, making installations faster, safer and easier.

The product is available in convenient contractor-sized packaging for easy field deployment and features bend-insensitive single-mode fiber, which enables installers to route the subunit around tight corners down to 5 mm (0.2 in) radius inside the home.

## Features and Benefits

### Aerial self-supporting or direct buried

Design flexibility

### All-dielectric design

Eliminates bonding and grounding

### Works with industry-standard wedge clamps

Ease of use

### UV-resistant, flame-retardant low-smoke/zero-halogen (LSZH) jacket

Rugged, durable and easy to strip

### Tray-rated per UL 13; UL 444; UL 1277; UL 1666; CSA 22.2 No. 230 and No. 232

Tested to industrial ruggedness standards



### Available in preconnectorized assemblies

Cable option for AnyLAN™

## Standards

### Approvals and Listings

Compact Drop listed to National Electrical Code® (NEC®) OFNR, FT-4

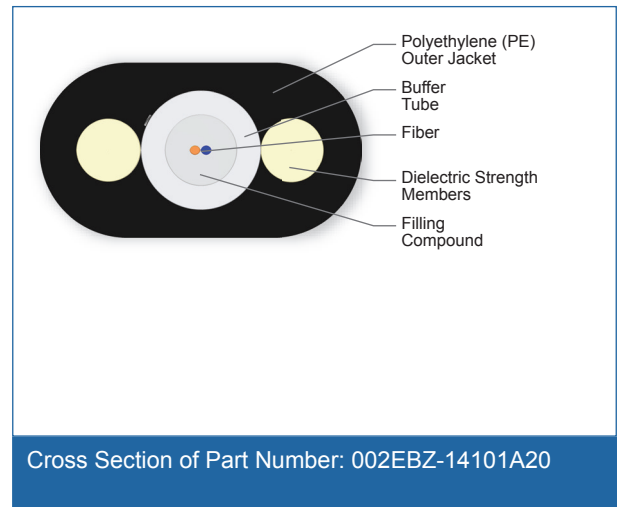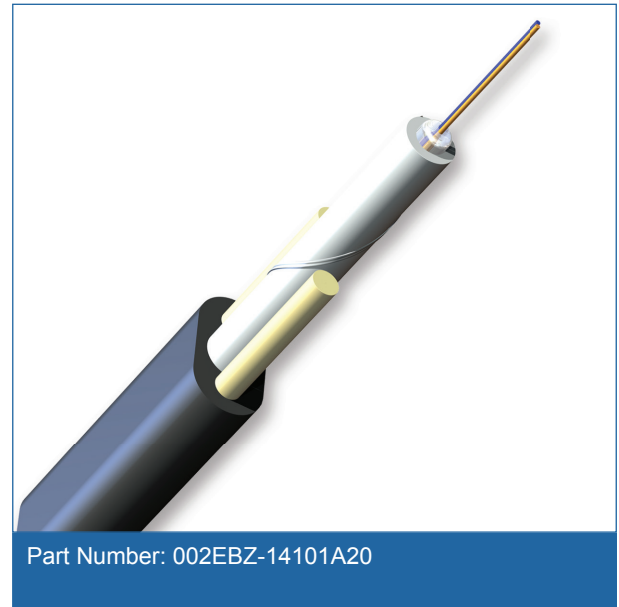

# SST-Drop™ FREEDM® LSZH Riser Cable

2 F, Single-mode (OS2)

CORNING

## Standards

**Design and Test Criteria** ANSI/ICEA S-110-717,  
Telcordia GR-20-CORE,  
Telcordia GR-409-CORE

## Specifications

General Specifications	
Environment	Indoor/Outdoor
Application	Aerial, Direct Buried, Duct, Self-Supporting, (Vertical Riser, General Building Applications, Tray Rated)
Cable Type	FREEDM® LSZH™ Flat-Drop
Product Type	Dielectric
Fiber Category	Single-mode (OS2)
Flame Rating	LSZH™/FRNC

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	FRNC/LSZH
Fiber Count	2
Buffer Tube Color Coding	Blue, Orange
Buffer Tube Diameter	3 mm (0.12 in)
Outer Jacket Material	LSZH™/FRNC
Outer Jacket Color	Black

Mechanical Characteristics Cable	
Weight	46 kg/km (31 lb/1000 ft)
Nominal Outer Diameter	8.1 mm x 4.4 mm (0.32 in x 0.17 in)
Min. Bend Radius Installation	80 mm (3.15 in)
Max. Tensile Strength, Short-Term	1350 N (300 lbf)
Max. Tensile Strength, Long-Term	400 N (90 lbf)

CORNING

# SST-Drop™ FREEDM® LSZH Riser Cable

2 F, Single-mode (OS2)

CORNING

## Maximum Span with One-Percent Installation Sag

Maximum Span with 1% Installation Sag, NESC Light	63 m (205 ft)
Maximum Span with 1% Installation Sag, NESC Medium	50 m (165 ft)
Maximum Span with 1% Installation Sag, NESC Heavy	34 m (110 ft)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

## Ordering Information

Part Number	002EBZ-14101A20
Product Description	SST-Drop™ FREEDM® LSZH™ Riser Cable, 2 F, Single-mode (OS2)
EAN Code	4056418165264



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2017 Corning Optical Communications. All rights reserved.

CORNING