

# FREEDM® LST™ Loose Tube, Gel-Free, Interlocking Armored Cable, Riser

2 F, 62.5 μm multimode (OM1)



CORNING

Corning FREEDM® LST™ gel-free interlocking armored cables are flame-retardant, indoor/outdoor, riser-rated cables designed for interbuilding and intrabuilding backbones in aerial, duct and riser applications. Encased in a spirally wrapped, aluminum interlocking armor for ruggedness and superior crush resistance, these cables are ideal for industrial and heavy traffic areas and installations requiring extra protection for optical cables and for high-fiber-count trunking applications in areas with limited conduit or vault space. The riser rating precludes the need for a transition splice when entering the building.

These cables are protected against water penetration by innovative waterblocking tapes and yarns that swell to absorb water without the use of messy gels to provide more efficient and craft-friendly cable preparation. This waterblocking technology makes cable access easier and simplifies the use of buffer tube fan-out kits. The buffer tubes and fibers in each tube are color coded for quick, easy identification. The SZ-stranded, loose tube design isolates fibers from installation, environmental rigors and allows for easy mid-span access.

The cable design is also National Electrical Code® (NEC®) listed (OFCR and FT-4) and meets NEC Article 770. The flexible, interlocking armored design offers over seven times the crush protection compared to unarmored cables (as characterized to ICEA-696) and allows easy one-step installation, thereby reducing the overall installation costs. The UV-resistant, flame-retardant jacket is rugged, durable and easy to strip.

*Note: This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables while still providing all of the required environmental protection of an indoor/outdoor cable jacket. Black is the standard jacket color using the part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

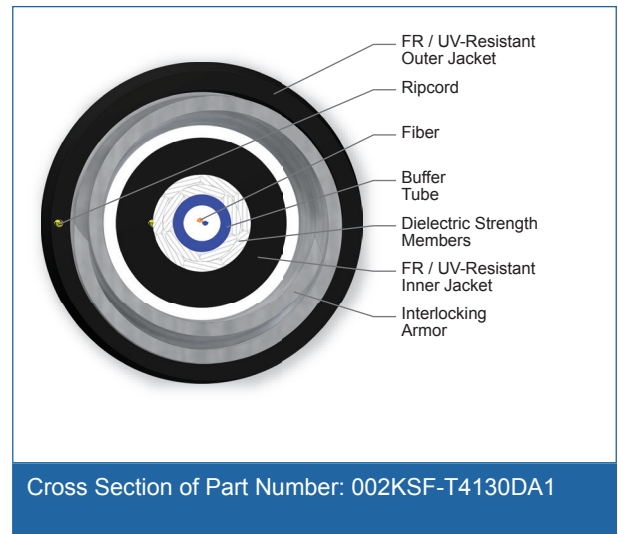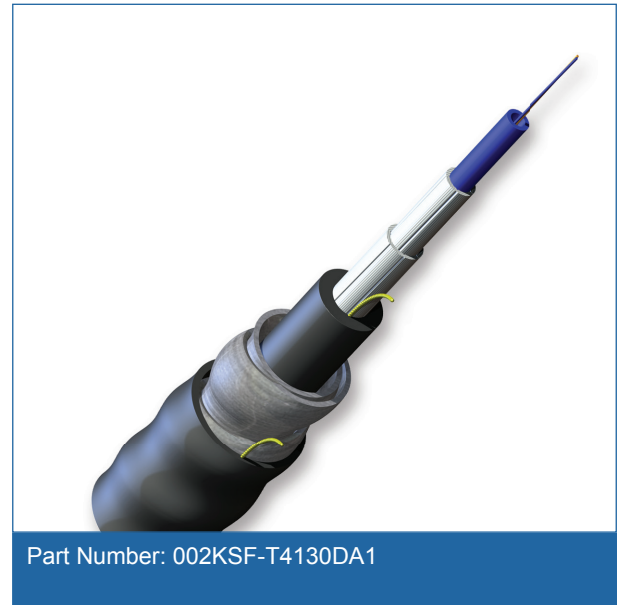

## Features and Benefits

### Flexible, interlocking armor design

Seven times crush protection compared to unarmored cables

### Gel-free waterblocking technology

Craft-friendly cable preparation

### Color-coded tubes and fibers

Quick and easy identification

### UV-resistant, flame-retardant jacket

Rugged, durable and easy to strip

CORNING

# FREEDM<sup>®</sup> LST<sup>™</sup> Loose Tube, Gel-Free, Interlocking Armored Cable, Riser

2 F, 62.5 μm multimode (OM1)

CORNING

## Standards

**Approvals and Listings** National Electrical Code<sup>®</sup> (NEC<sup>®</sup>) OFCR, CSA OFC FT-4

**Common Installations** Outdoor aerial and duct; indoor vertical riser and general purpose horizontal according to NEC Article 770

**Design and Test Criteria** ANSI/ICEA S-104-696

## Specifications

| General Specifications |   |
|------------------------|---|
| Environment            | Indoor/Outdoor Cables   |
| Application            | Aerial, Direct Buried, Duct, General Purpose Horizontal, (Vertical Riser) |
| Cable Type             | Loose Tube  |
| Product Type           | Interlocking armor  |
| Flame Rating           | Riser (OFCR)  |
| Fiber Category         | 62.5 μm MM (OM1)  |

| Temperature Range |                                    |
|-------------------|------------------------------------|
| Storage           | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation      | -10 °C to 60 °C (14 °F to 140 °F)  |
| Operation         | -40 °C to 70 °C (-40 °F to 158 °F) |

| Cable Design  |   |
|---|---|
| Fiber Count   | 2   |
| Fiber Coloring                                      | Blue, Orange                                |
| Fibers per Tube                                     | 2   |
| Number of Tube Positions                            | 1   |
| Number of Active Tubes                              | 1   |
| Tensile Strength Elements and/or Armoring - Layer 1 | Water-swellable dielectric strength members |
| Number of Ripcords                                  | 1   |
| Inner Jacket Material                               | Flame-Retardant, UV-Resistant               |
| Tensile Strength Elements and/or Armoring - Layer 2 | Interlocking armor                          |

# FREEDM® LST™ Loose Tube, Gel-Free, Interlocking Armored Cable, Riser

2 F, 62.5 µm multimode (OM1)

CORNING

## Cable Design

|                       |                               |
|-----------------------|-------------------------------|
| Outer Jacket Material | Flame-Retardant, UV-Resistant |
| Outer Jacket Color    | Black                         |

## Mechanical Characteristics Cable

|                                   |                            |
|-----------------------------------|----------------------------|
| Max. Tensile Strength, Short-Term | 2700 N (600 lbf)           |
| Max. Tensile Strength, Long-Term  | 810 N (180 lbf)            |
| Nominal Core Diameter             | 8.0 mm (0.31 in)           |
| Nominal Outer Diameter            | 15 mm (0.59 in)            |
| Min. Bend Radius Installation     | 225 mm (8.9 in)            |
| Min. Bend Radius Operation        | 150 mm (5.9 in)            |
| Weight                            | 182 kg/km (122 lb/1000 ft) |

## Chemical Characteristics

|      |   |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|---|

## Fiber Specifications

### Optical Characteristics (cabled)

|   |                         |
|---|-------------------------|
| Fiber Core Diameter                     | 62.5 µm                 |
| Fiber Category                          | OM1                     |
| Fiber Code                              | K                       |
| Performance Option Code                 | 30                      |
| Wavelengths                             | 850 nm / 1300 nm        |
| Maximum Attenuation                     | 3.4 dB/km / 1.0 dB/km   |
| Serial 1 Gigabit Ethernet               | 300 m / 550 m           |
| Serial 10 Gigabit Ethernet              | 33 m / -                |
| Min. Overfilled Launch (OFL) Bandwidth  | 200 MHz*km / 500 MHz*km |
| Minimum Effective Modal Bandwidth (EMB) | 220 MHz*km / -          |

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

# FREEDM<sup>®</sup> LST<sup>™</sup> Loose Tube, Gel-Free, Interlocking Armored Cable, Riser

2 F, 62.5  $\mu$ m multimode (OM1)



## Ordering Information

|                     |  |
|---------------------|--|
| Part Number         | 002KSF-T4130DA1  |
| Product Description | FREEDM <sup>®</sup> LST <sup>™</sup> Single-Tube, Gel-Free, Interlocking Armored Cable, Riser, 2 F, 62.5 $\mu$ m multimode (OM1) |
| EAN Code            | 4056418199276  |



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.