

# Zipcord Tight-Buffered Cable, Riser

2 F, 2.8 mm diameter, SMF-28® ULTRA, Single-mode (OS2)

CORNING

Corning zipcord cables are designed for interconnect applications. Two 900 µm buffered fibers are surrounded by aramid yarn strength members and a flame-retardant jacket. This cable design offers mechanical durability and flame resistance that meet the requirements of the National Electrical Code® (NEC®) Article 770.

*This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

## Features and Benefits

### Meets NEC requirements

Meets burn test criteria

### All-dielectric strength member

Mechanical durability



## Standards

### Listings

National Electrical Code® (NEC®) OFNR, FT-4

### Design and Test Criteria

UL-1666 and CSA FT-4 (for riser and general building applications); ICEA S-83-596

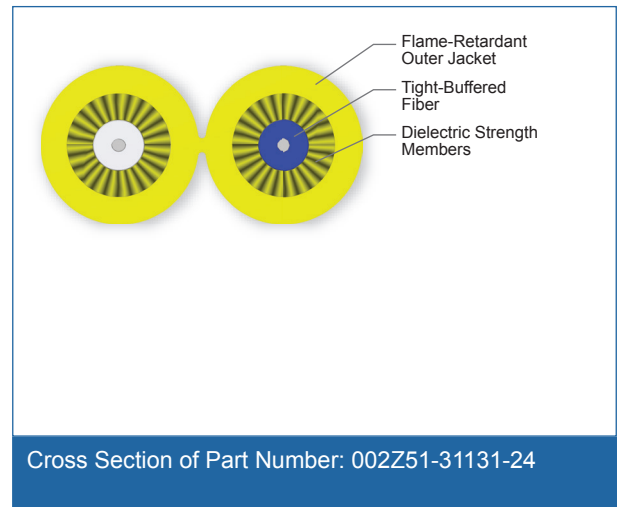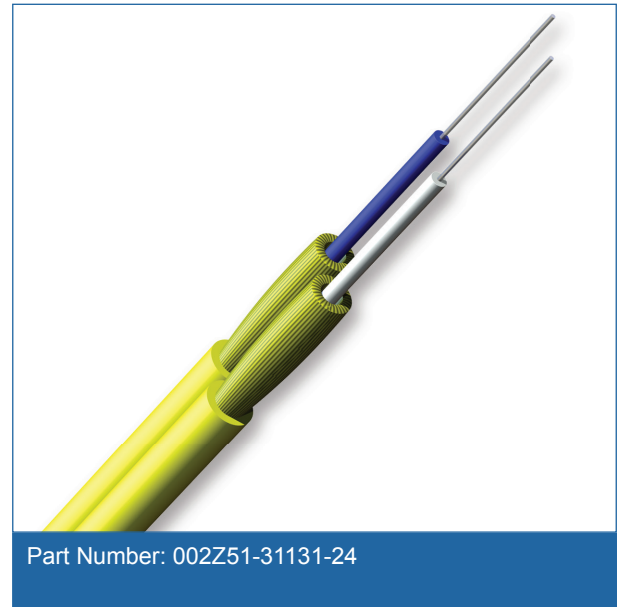

# Zipcord Tight-Buffered Cable, Riser

2 F, 2.8 mm diameter, SMF-28<sup>®</sup> ULTRA, Single-mode (OS2)

CORNING

## Specifications

### General Specifications

Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser
Cable Type	Tight-Buffered
Product Type	Interconnect
Flame Rating	Riser (OFNR)
Fiber Category	Single-mode (OS2)

### Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

### Cable Design

Fiber Count	2
Tight Buffer Color	Blue, White
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Number of Subunits	2
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Yellow

### Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	220 N (50 lbf)
Max. Tensile Strength, Long-Term	66 N (15 lbf)
Weight	12.42 kg/km (8.34 lb/1000 ft)
Nominal Outer Diameter	2.8 mm x 5.6 mm (0.11 in x 0.22 in)
Min. Bend Radius Installation	42 mm (1.7 in)
Min. Bend Radius Operation	14 mm (0.55 in)

### Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

CORNING

# Zipcord Tight-Buffered Cable, Riser

2 F, 2.8 mm diameter, SMF-28® ULTRA, Single-mode (OS2)



## Fiber Specifications

Optical Characteristics (cabled)	
Fiber Name	SMF-28® Ultra fiber
Fiber Category	G.652.D/G.657.A1
Fiber Code	Z
Performance Option Code	31
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.65 dB/km / 0.65 dB/km / 0.5 dB/km

## Ordering Information

Part Number	002Z51-31131-24
Product Description	Zipcord Tight-Buffered Cable, Riser, 2 F, 2.8 mm diameter, SMF-28® ULTRA, Single-mode (OS2)
EAN Code	4056418138107



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

Corning Optical Communications RF LLC (Corning Gilbert) • 5310 W. Camelback Rd. • Glendale, AZ 85301 USA

800-528-5567 • FAX: 800-344-6356 • International: +1-623-245-1050 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

Page 3 | Revision date 2016-03-02

A complete listing of the trademarks of Corning Optical Communications RF is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications RF is ISO 9001

