

DFX[®] Cable, Riser

2 F, SMF-28[®] Ultra fiber, Single-mode (OS2)

CORNING

Corning DFX[®] cables have two 900 μm tight-buffered fibers surrounded by aramid yarn strength members in a flexible flame-retardant jacket. These cables meet the application requirements of the National Electrical Code (NEC) Article 770 and are OFNR and FT-4 listed. DFX cables are ideal for interconnect applications.

Features and Benefits


Two 900 μm tight-buffered fibers
Small 2.9 mm package

Flexible 2-fiber cable
High-density interconnect applications

Standards

Approvals and Listings National Electrical Code[®]
(NEC[®]) OFNR, CSA FT-4

Design and Test Criteria ANSI/ICEA S-83-596,
Telcordia GR-409, UL-1666

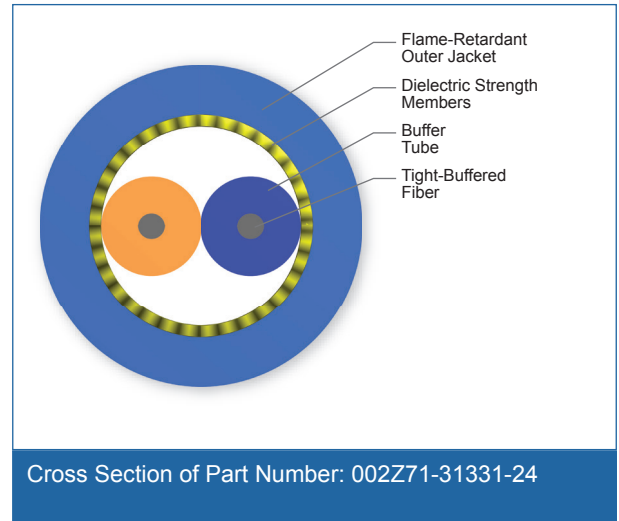

Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser
Cable Type	Tight-Buffered
Product Type	Interconnect

CORNING

DFX[®] Cable, Riser

2 F, SMF-28[®] Ultra fiber, Single-mode (OS2)

CORNING

General Specifications

Flame Rating	Riser (OFNR)
Fiber Category	Single-mode (OS2)

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 70 °C (32 °F to 158 °F)
Operation	0 °C to 70 °C (32 °F to 158 °F)

Cable Design

Fiber Count	2
Tight Buffer Color	Blue, Orange
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Outer Jacket Color	Blue
Outer Jacket Material	Flame-retardant

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	100 N (22 lbf)
Max. Tensile Strength, Long-Term	50 N (11 lbf)
Min. Bend Radius Installation	50 mm (2 in)
Min. Bend Radius Operation	30 mm (1.2 in)
Weight	7.81 kg/km (5.24 lb/1000 ft)
Nominal Outer Diameter	2.9 mm (0.1 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	SMF-28 [®] Ultra fiber
Fiber Category	G.652.D/G.657.A1
Fiber Code	Z

DFX[®] Cable, Riser

2 F, SMF-28[®] Ultra fiber, Single-mode (OS2)



Fiber Specifications

Optical Characteristics (cabled)	
Performance Option Code	31
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.65 dB/km / 0.65 dB/km / 0.5 dB/km

Ordering Information

Part Number	002Z71-31331-24
Product Description	DFX [®] Cable, Riser, 2 F, SMF-28 [®] Ultra fiber, Single-mode (OS2)
EAN Code	4056418137988



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2017 Corning Optical Communications. All rights reserved.

