

# FREEDM® One Tight-Buffered Cable, Riser

6 F, 62.5 µm multimode (OM1)

CORNING

Corning FREEDM® One riser cables are flame-retardant, UV-resistant, indoor/outdoor cables designed for aerial and duct applications with no need for a transition splice when entering the building. The tight-buffered construction facilitates easier termination for low-fiber-count applications in the local area network (LAN) and eliminates the need for fan-out kits. The design features TIA-598 color-coded 900 µm buffered fibers for easy identification, consistent stripping and direct termination. The small diameter and bend radius of the cable allow for easy installation in space-constrained areas while the innovative waterblocking technology is ideal for outside plant (OSP) applications. The all-dielectric cable construction requires no grounding or bonding, and the UV-resistant, flame-retardant jacket is rugged, durable and easy to strip.

*Note: This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables while still providing all of the required environmental protection of an indoor/outdoor cable jacket. Black is the standard jacket color using the part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

## Features and Benefits

### Waterblocking technology

OSP (outdoor) applications

### Small diameter and bend radius

Easy installation in space-constrained areas

### Color-coded fibers



Quick and easy identification

### All-dielectric construction

Requires no grounding or bonding

### UV-resistant, flame-retardant jacket

Rugged, durable and easy to strip

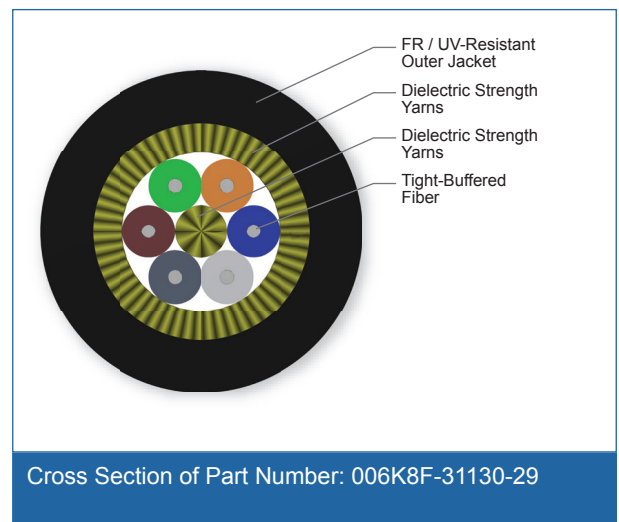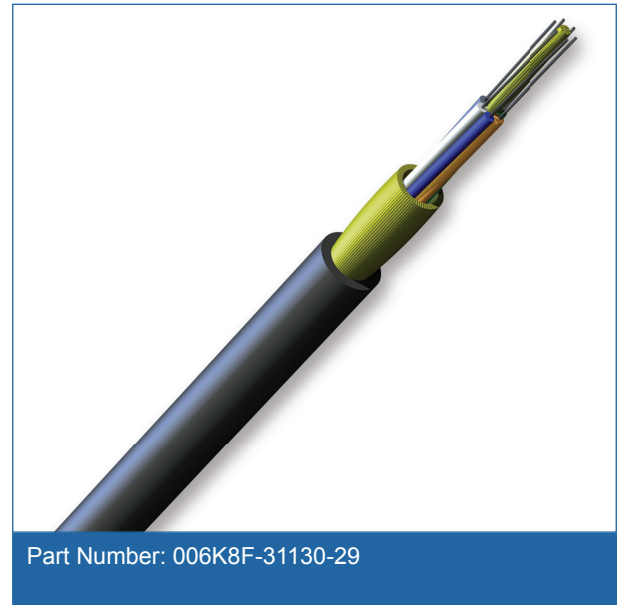

## Standards

**Approvals and Listings** National Electrical Code® (NEC®) OFNR, FT-4

**Design and Test Criteria** ICEA S-104-696

CORNING

# FREEDM<sup>®</sup> One Tight-Buffered Cable, Riser

6 F, 62.5 μm multimode (OM1)

CORNING

## Specifications

General Specifications	
Environment	Indoor/Outdoor Cables
Application	Aerial, Duct, General Purpose Horizontal, Vertical Riser
Cable Type	Tight-Buffered
Product Type	Dielectric
Flame Rating	Riser (OFNR)
Fiber Category	62.5 μm MM (OM1)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	6
Tight Buffer Color	Blue, Orange, Green, Brown, Slate, White
Tensile Strength Elements and/or Armoring - Layer 1	Water-swellable strength members
Outer Jacket Material	Flame-Retardant, UV-Resistant
Outer Jacket Color	Black

Mechanical Characteristics Cable	
Weight	25.7 kg/km (17.3 lb/1000 ft)
Nominal Outer Diameter	5.5 mm (0.22 in)
Min. Bend Radius Installation	83 mm (3.2 in)
Min. Bend Radius Operation	55 mm (2.2 in)
Max. Tensile Strength, Short-Term	675 N (150 lbf)
Max. Tensile Strength, Long-Term	200 N (45 lbf)

Chemical Characteristics	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU

# FREEDM® One Tight-Buffered Cable, Riser

6 F, 62.5 µm multimode (OM1)



## Fiber Specifications

Optical Characteristics (cabled)	
Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	006K8F-31130-29
Product Description	FREEDM® One Tight-Buffered Cable, Riser, 6 F, 62.5 µm multimode (OM1)
EAN Code	4056418191171



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

