

MIC® DX Tight-Buffered Armored Cable, Plenum

6 F, 50 µm multimode, extended 10G distance (OM4)

CORNING

Corning MIC® DX armored plenum cables are standard MIC subunits placed inside a dielectric armor for ruggedness and superior crush resistance without the conductive properties of traditional armor. These cables are designed for use in intrabuilding backbone and horizontal installations. Individually jacketed TBI® buffered fibers enable easy, consistent stripping and facilitate termination.

The fibers are stranded around a dielectric central member that is protected by a flexible, all-dielectric armor offering easy, one-step installation and over four times the crush protection of unarmored cables. With a flame-retardant outer jacket, this cable is particularly useful for heavy traffic or more challenging mechanical exposure conditions and applications requiring extra rugged cables.

This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

Features and Benefits

Dielectric armor

Four times crush protection compared to unarmored

TBI buffered fibers

Easy, consistent stripping

Flame-retardant jacket

Rugged and durable

Easy armor removal

Increased safety and speed at installation



Standards

Approvals and Listings

National Electrical Code® (NEC®) OFNP, CSA FT-6, ICEA S-83-596

Flame Resistance

NFPA 262 (for plenum, riser and general building applications)

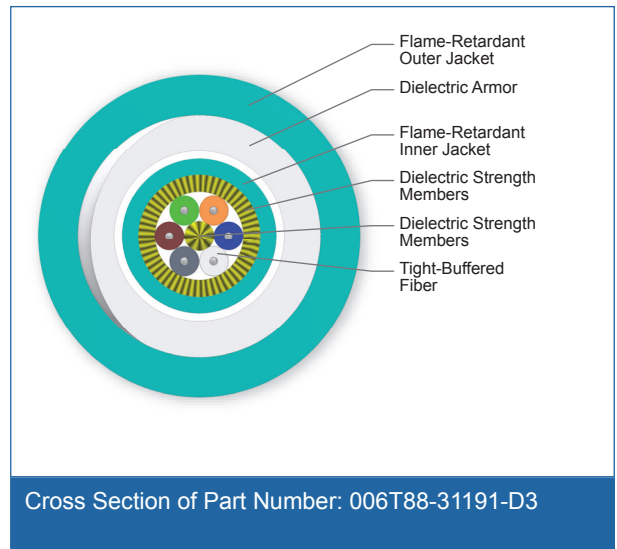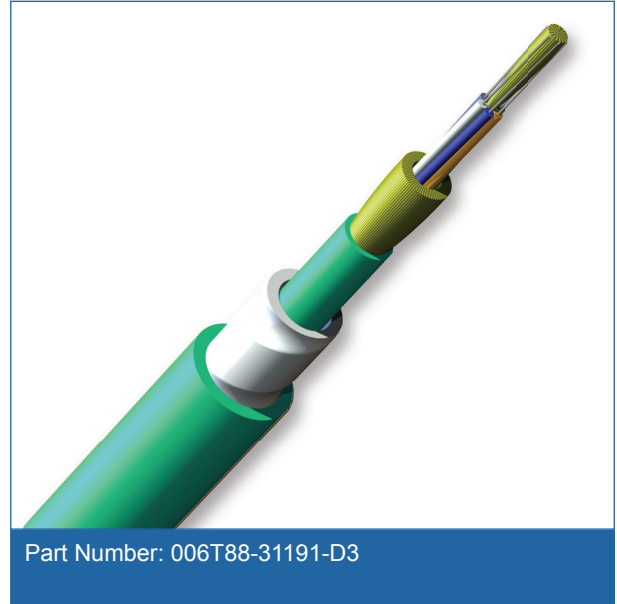

MIC® DX Tight-Buffered Armored Cable, Plenum

6 F, 50 µm multimode, extended 10G distance (OM4)

CORNING

Specifications

General Specifications

| | |
|----------------|------------------------------------|
| Environment | Indoor |
| Application | General Purpose Horizontal, Plenum |
| Cable Type | Tight-Buffered |
| Product Type | Dielectric armor |
| Flame Rating | Plenum (OFNP) |
| Fiber Category | 50 µm MM (OM4+) |

Temperature Range

| | |
|--------------|------------------------------------|
| Storage | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | 0 °C to 60 °C (32 °F to 140 °F) |
| Operation | 0 °C to 70 °C (32 °F to 158 °F) |

Cable Design

| | |
|---|--|
| Fiber Count | 6 |
| Tight Buffer Color | Blue, Orange, Green, Brown, Slate, White |
| Tensile Strength Elements and/or Armoring - Layer 1 | Dielectric strength members |
| Inner Jacket Material | Flame-retardant |
| Tensile Strength Elements and/or Armoring - Layer 3 | Dielectric armor |
| Outer Jacket Material | Flame-retardant |
| Outer Jacket Color | Aqua |

Mechanical Characteristics Cable

| | |
|-----------------------------------|-------------------------------|
| Nominal Inner Cable Diameter | 4.4 mm (0.17 in) |
| Nominal Outer Diameter | 10.5 mm (0.41 in) |
| Weight | 123.9 kg/km (83.3 lb/1000 ft) |
| Max. Tensile Strength, Short-Term | 890 N (200 lbf) |
| Max. Tensile Strength, Long-Term | 444 N (100 lbf) |
| Min. Bend Radius Installation | 158 mm (6.2 in) |
| Min. Bend Radius Operation | 105 mm (4.1 in) |

MIC® DX Tight-Buffered Armored Cable, Plenum

6 F, 50 µm multimode, extended 10G distance (OM4)

CORNING

Fiber Specifications

| Optical Characteristics (cabled) | |
|---|--------------------------|
| Fiber Core Diameter | 50 µm |
| Fiber Category | OM4 Extended Distance |
| Fiber Code | T |
| Performance Option Code | 91 |
| Wavelengths | 850 nm / 1300 nm |
| Maximum Attenuation | 3.0 dB/km / 1.0 dB/km |
| Serial 1 Gigabit Ethernet | 1100 m / 600 m |
| Serial 10 Gigabit Ethernet | 600 m / - |
| Min. Overfilled Launch (OFL) Bandwidth | 3500 MHz*km / 500 MHz*km |
| Minimum Effective Modal Bandwidth (EMB) | 5350 MHz*km / - |

Ordering Information

| | |
|---------------------|---|
| Part Number | 006T88-31191-D3 |
| Product Description | MIC® DX Tight-Buffered Armored Cable, Plenum, 6 F, 50 µm multimode, extended 10G distance (OM4) |
| EAN Code | 4056418149561 |



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING