

# ActiFi™ FREEDM® DAS Cables for Indoor/ Outdoor Riser

6 F, 6 Cu Conductor, 12AWG

CORNING

Corning ActiFi™ FREEDM® Cables provide the ultimate solution for indoor-outdoor remote powering of distributed antenna systems (DAS). The designs use 6-, 12- or 24-fiber cables with 2, 4, 6 or 12 copper conductors. The gauge of wire (14 or 16 AWG) necessary to power the remote active gear determines distance traveled and strength required.

Corning ActiFi™ FREEDM® Cables provide a time and cost-saving solution for installations requiring remotely-powered equipment. By integrating copper and fiber in one cable, ActiFi FREEDM Cables eliminate the need to install separate power and fiber cables. This saves installation time, labor costs and duct or tray space. The compact and versatile design is available in riser or interlocking armored riser for additional protection where conduit may not be feasible.

## Features and Benefits

### 14 or 16 AWG copper conductor

Power transmission with flexibility in design

### 4-, 6-, 12- or 24-fibers

Readily identifiable

### Individual fibers

Easily accessible for splicing

### ClearCurve® ZBL or SMF-28® Ultra fibers

Reliable performance in challenging routes

### 2-in-1 cable design


One cable meets power and signal needs

## Standards


**Approvals and Listings**      Fibers compliant with ITU-T G.652.D and G.657.B3

**Common Installations**      Compliant with ICEA S-83-596 (compliant at tensile loads listed in the specifications table)

**Design and Test Criteria**      Compliant with UL-13 and NEC 725 Class 2 (CL2P)

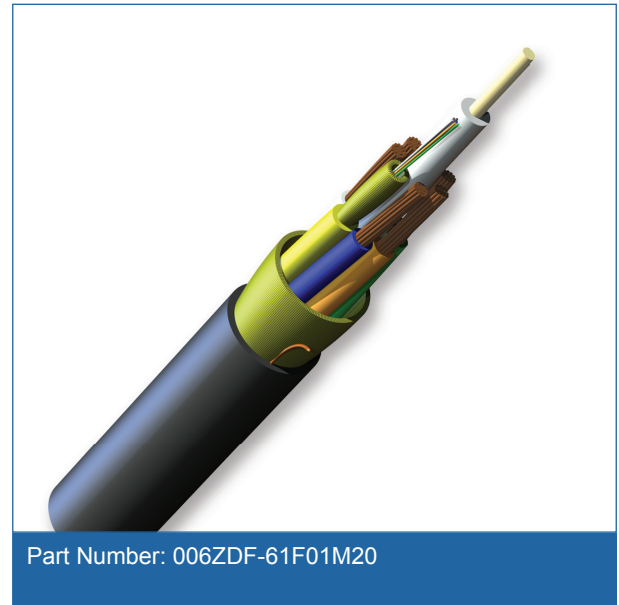

Part Number: 006ZDF-61F01M20

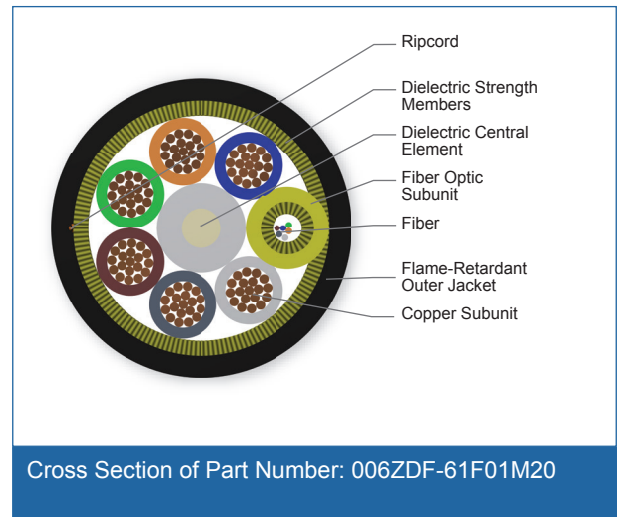

Cross Section of Part Number: 006ZDF-61F01M20

# ActiFi™ FREEDM® DAS Cables for Indoor/ Outdoor Riser

6 F, 6 Cu Conductor, 12AWG

CORNING

## Specifications

### General Specifications

Environment	Indoor/Outdoor Cables
Application	Vertical Riser
Cable Type	Loose Tube
Fiber Category	SMF-28® Ultra fiber

### Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (14 °F to 140 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

### Cable Design

Central Element	Jacketed GRP
Fiber Count	6
Fiber Coloring	Blue, Orange, Green, Brown
Fibers per Tube	6
Number of Tube Positions	1
Number of Active Tubes	1
Buffer Tube Color Coding	Yellow
Buffer Tube Diameter	3.3 mm (0.13 in)
Number of Ripcords	1
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Black

### Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	810 N (180 lbf)
Weight	247 kg/km (165 lb/1000 ft)
Nominal Outer Diameter	13.3 mm (0.52 in)
Min. Bend Radius Installation	199.5 mm (7.85 in)
Min. Bend Radius Operation	133 mm (5.24 in)
Conductor Size	12AWG
Number of Conductors	6

# ActiFi™ FREEDM® DAS Cables for Indoor/ Outdoor Riser

6 F, 6 Cu Conductor, 12AWG

CORNING

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	SMF-28® Ultra fiber
Fiber Category	G.657.A1
Fiber Code	Z
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Typical Attenuation	0.33 dB/km / 0.33 dB/km / 0.19 dB/km

\* For more information on typical attenuation please see the Corning whitepaper at [http://csmedia.corning.com/opcomm//Resource\\_Documents/whitepapers\\_r/ LAN-1863-AEN.pdf](http://csmedia.corning.com/opcomm//Resource_Documents/whitepapers_r/ LAN-1863-AEN.pdf)

## Ordering Information

Part Number	006ZDF-61F01M20
Product Description	ActiFi™ FREEDM® DAS Cables for Indoor/Outdoor Riser, 6 F, 6 Cu Conductor, 12AWG
EAN Code	4056418142210



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

Corning Optical Communications RF LLC (Corning Gilbert) • 5310 W. Camelback Rd. • Glendale, AZ 85301 USA

800-528-5567 • FAX: 602-954-6358 • International: +1-623-245-1050 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

Page 3 | Revision date 2016-03-03

A complete listing of the trademarks of Corning Optical Communications RF is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications RF is ISO 9001

CORNING