

FREEDM® One Tight-Buffered Cable, Riser

12 F, Single-mode (OS2)

CORNING

Corning FREEDM® One riser cables are flame-retardant, UV-resistant, indoor/outdoor cables designed for aerial and duct applications with no need for a transition splice when entering the building. The tight-buffered construction facilitates easier termination for low-fiber-count applications in the local area network (LAN) and eliminates the need for fan-out kits. The design features TIA-598 color-coded 900 µm buffered fibers for easy identification, consistent stripping and direct termination. The small diameter and bend radius of the cable allow for easy installation in space-constrained areas while the innovative waterblocking technology is ideal for outside plant (OSP) applications. The all-dielectric cable construction requires no grounding or bonding, and the UV-resistant, flame-retardant jacket is rugged, durable and easy to strip.

Note: This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables while still providing all of the required environmental protection of an indoor/outdoor cable jacket. Black is the standard jacket color using the part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

Features and Benefits

Waterblocking technology

OSP (outdoor) applications

Small diameter and bend radius

Easy installation in space-constrained areas

Color-coded fibers


Quick and easy identification

All-dielectric construction


Requires no grounding or bonding

UV-resistant, flame-retardant jacket

Rugged, durable and easy to strip

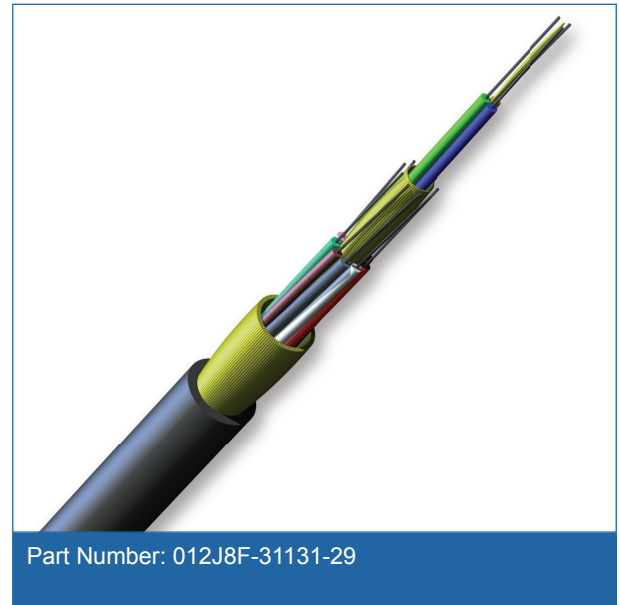

Part Number: 012J8F-31131-29

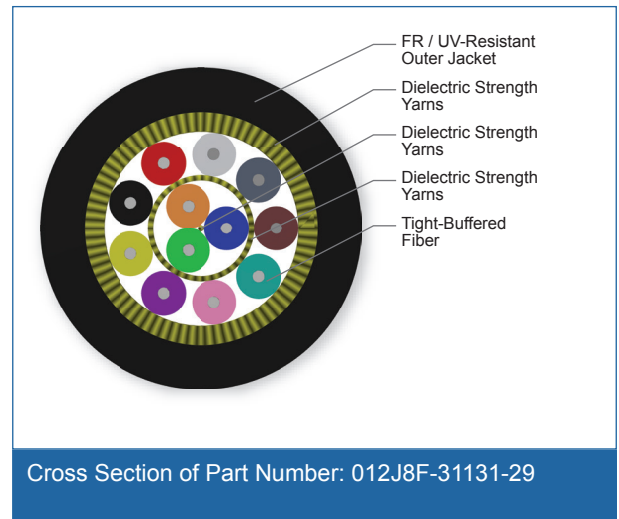

Cross Section of Part Number: 012J8F-31131-29

Standards

Approvals and Listings

National Electrical Code®
(NEC®) OFNR, FT-4

Design and Test Criteria

ICEA S-104-696

CORNING

FREEDM® One Tight-Buffered Cable, Riser

12 F, Single-mode (OS2)

CORNING

Specifications

General Specifications

Environment	Indoor/Outdoor Cables
Application	Aerial, Duct, General Purpose Horizontal, Vertical Riser
Cable Type	Tight-Buffered
Product Type	Dielectric
Flame Rating	Riser (OFNR)
Fiber Category	Single-mode (OS2)

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	12
Tight Buffer Color	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Tensile Strength Elements and/or Armoring - Layer 1	Water-swellaable strength members
Outer Jacket Material	Flame-Retardant, UV-Resistant
Outer Jacket Color	Black

Mechanical Characteristics Cable

Weight	35.6 kg/km (23.9 lb/1000 ft)
Nominal Outer Diameter	6.5 mm (0.26 in)
Min. Bend Radius Installation	98 mm (3.8 in)
Min. Bend Radius Operation	65 mm (2.6 in)
Max. Tensile Strength, Short-Term	675 N (150 lbf)
Max. Tensile Strength, Long-Term	200 N (45 lbf)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

CORNING

FREEDM® One Tight-Buffered Cable, Riser

12 F, Single-mode (OS2)

CORNING

Fiber Specifications

Optical Characteristics (cabled)	
Fiber Name	ClearCurve® LBL
Fiber Category	G.657.A2/G.657.B2
Fiber Code	J
Performance Option Code	31
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.65 dB/km / 0.65 dB/km / 0.5 dB/km

Ordering Information

Part Number	012J8F-31131-29
Product Description	FREEDM® One Tight-Buffered Cable, Riser, 12 F, Single-mode (OS2)
EAN Code	4056418236735



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING