

# FREEDM® LST™ Loose Tube, Gel-Free Cable, Plenum

12 F, 50 µm multimode (OM4)

CORNING

Corning FREEDM® loose tube gel-free plenum cables are flame-retardant, indoor/outdoor, plenum-rated cables suitable for installation in interbuilding and intrabuilding backbones in aerial, duct and riser or plenum applications. The loose tube design offers mechanical ruggedness and environmental durability while the all-dielectric cable construction requires no grounding or bonding. The water-swallowable yarn eliminates the need for gel-filling compound and allows more efficient and craft-friendly cable preparation. The 250 µm color-coded fibers allow quick and easy identification during installation.

The flexible, flame-retardant outer jacket is UV-resistant and enables direct exposure to sunlight. Interlocking armor is available for special applications requiring additional mechanical durability. The plenum rating of this cable eliminates the need to transition splice when entering the building and minimizes routing restrictions once inside the building. Meeting the requirements of the National Electrical Code® (NEC®) Article 770, the cables are also OFNP and FT-6 listed.

*Note: This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables while still providing all of the required environmental protection of an indoor/outdoor cable jacket. Black is the standard jacket color using the part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

## Features and Benefits

### Gel-free waterblocking technology

Craft-friendly cable preparation

### Loose tube design

Stable performance and compatibility with all common fiber types

### Color-coded fibers



Quick and easy identification

### All-dielectric construction

Requires no grounding or bonding

### Meets NEC requirements

Meets burn test criteria

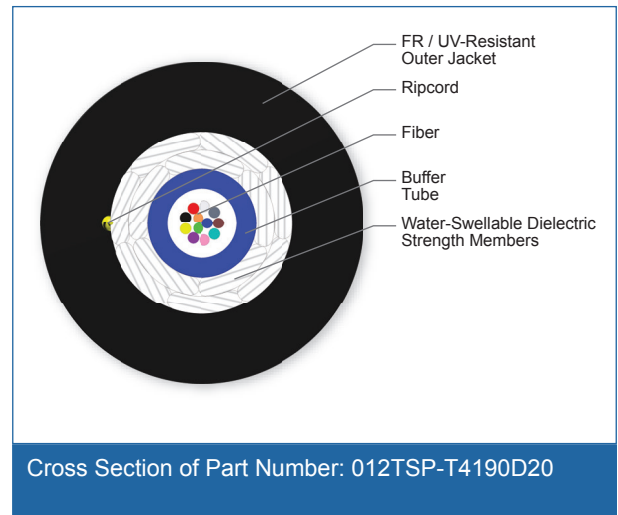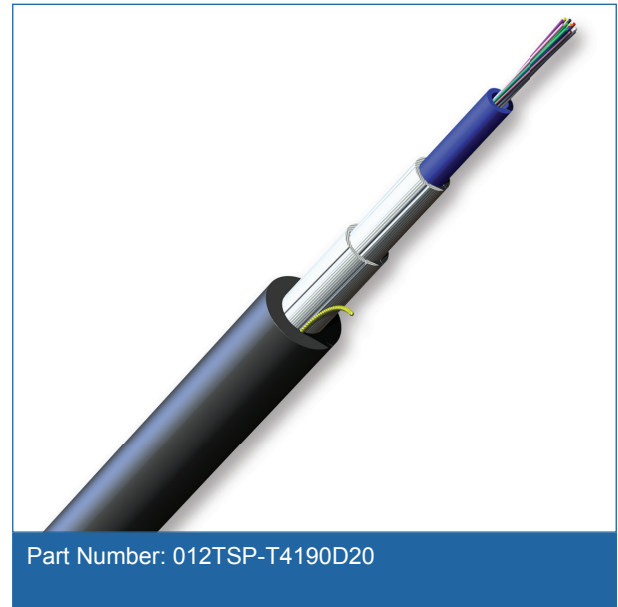

# FREEDM<sup>®</sup> LST<sup>™</sup> Loose Tube, Gel-Free Cable, Plenum

12 F, 50 µm multimode (OM4)

CORNING

## Standards

**Approvals and Listings** National Electrical Code<sup>®</sup> (NEC<sup>®</sup>) OFNP, CSA FT-6

**Design and Test Criteria** ANSI/ICEA S-104-696; NFPA 262 (for plenum, riser and general building applications)

## Specifications

General Specifications	
Environment	Indoor/Outdoor Cables
Application	Aerial, Direct Buried, Duct, General Purpose Horizontal, (Vertical Riser, Plenum)
Cable Type	Loose Tube
Product Type	Dielectric
Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM4)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (32 °F to 140 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Fiber Count	12
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	1
Number of Active Tubes	1
Buffer Tube Color Coding	Aqua
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Outer Jacket Material	Flame-Retardant, UV-Resistant
Outer Jacket Color	Black
Number of Ripcords	2

# FREEDM<sup>®</sup> LST<sup>™</sup> Loose Tube, Gel-Free Cable, Plenum

12 F, 50 µm multimode (OM4)



## Mechanical Characteristics Cable

Weight	60.98 kg/km (40.98 lb/1000 ft)
Nominal Outer Diameter	7.4 mm (0.29 in)
Max. Tensile Strength, Short-Term	1350 N (300 lbf)
Max. Tensile Strength, Long-Term	400 N (90 lbf)
Min. Bend Radius Installation	111 mm (4.4 in)
Min. Bend Radius Operation	74 mm (2.9 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	50 µm
Fiber Category	OM4
Fiber Code	T
Performance Option Code	90
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.0 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	1100 m / 600 m
Serial 10 Gigabit Ethernet	550 m / -
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	4700 MHz*km / -

\* Assumes 1.0 dB maximum total connector/splice loss.

\* Meets 0.75 ns optical skew when used in all Corning Plug and Play<sup>™</sup>/EDGE<sup>™</sup> systems solutions.

- Notes:
- 1) 50 µm multimode fiber macrobend loss ≤ 0.2 dB at 850 nm for two turns around 7.5 mm radius mandrel.
  - 2) Improved attenuation and bandwidth options available.
  - 3) Bend-insensitive single-mode fibers available on request.
  - 4) Contact a Corning Customer Care Representative for additional information.

# FREEDM<sup>®</sup> LST<sup>™</sup> Loose Tube, Gel-Free Cable, Plenum

12 F, 50 µm multimode (OM4)



## Ordering Information

Part Number	012TSP-T4190D20
Product Description	FREEDM <sup>®</sup> LST <sup>™</sup> Loose Tube, Gel-Free Cable, Plenum, 12 F, 50 µm multimode (OM4)
EAN Code	4056418175188



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.