

MIC[®] Tight-Buffered, Interlocking Armored Cable, Plenum

12 F, ClearCurve[®] ZBL, Single-mode (OS2)

CORNING

Corning MIC[®] interlocking armored plenum cables are designed for use in plenum, riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use individually jacketed buffered fibers enabling easy, consistent stripping and facilitating termination. The fibers are surrounded by dielectric strength members and protected by a flame-retardant jacket.

The core is protected by a flexible, spirally wrapped, aluminum interlocking armor that offers easy, one-step installation and up to seven times the crush protection of unarmored cables. With a flame-retardant outer jacket, this cable is particularly useful for heavy traffic or more challenging mechanical exposure conditions and applications requiring extra rugged cables.

This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

Features and Benefits

Flexible, interlocking armor design

Up to seven times crush protection compared to unarmored cables

Buffered fibers

Easy, consistent stripping

Flame-retardant jacket

Rugged and durable



Standards

Listings

National Electrical Code[®]
(NEC[®]) OFCP, FT-6

Design and Test Criteria

NFPA 262 and CSA FT-6
(for plenum, riser and general building applications);
ICEA S-83-596

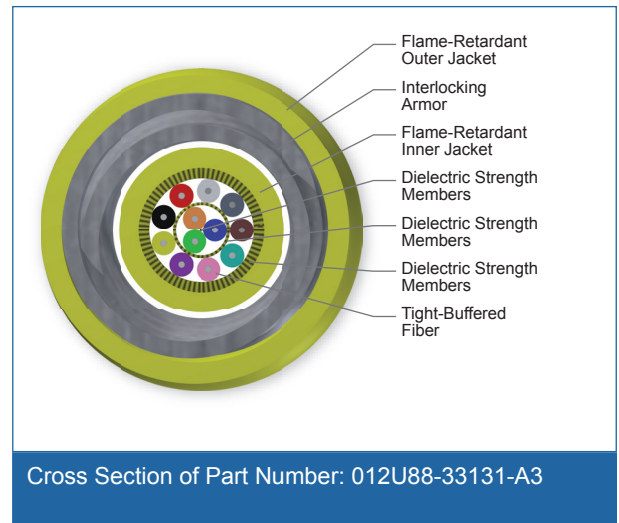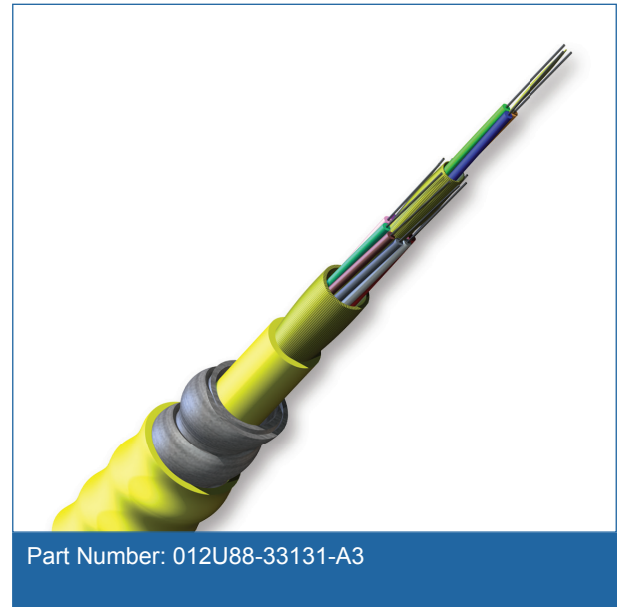

MIC[®] Tight-Buffered, Interlocking Armored Cable, Plenum

12 F, ClearCurve[®] ZBL, Single-mode (OS2)

CORNING

Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser, Plenum
Cable Type	Tight-Buffered
Product Type	Interlocking armor
Flame Rating	Plenum (OFCP)
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (32 °F to 140 °F)
Operation	0 °C to 70 °C (32 °F to 158 °F)

Cable Design	
Fiber Count	12
Tight Buffer Color	Blue, Orange, Green
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tight Buffer Color, Layer 2	Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Tensile Strength Elements and/or Armoring - Layer 2	Dielectric strength members
Inner Jacket Material	Flame-retardant
Tensile Strength Elements and/or Armoring - Layer 3	Interlocking armor
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Yellow

Mechanical Characteristics Cable	
Nominal Outer Diameter	11.3 mm (.44 in)
Nominal Inner Cable Diameter	6.0 mm (0.24 in)
Weight	113 kg/km (75.9 lb/1000 ft)
Min. Bend Radius Installation	170 mm (6.7 in)
Min. Bend Radius Operation	113 mm (4.4 in)
Max. Tensile Strength, Short-Term	440 N (100 lbf)
Max. Tensile Strength, Long-Term	132 N (30 lbf)

MIC[®] Tight-Buffered, Interlocking Armored Cable, Plenum

12 F, ClearCurve[®] ZBL, Single-mode (OS2)



Fiber Specifications

Optical Characteristics (cabled)	
Fiber Name	ClearCurve [®] ZBL
Fiber Category	G.657.B3/G.652.D
Fiber Code	U
Performance Option Code	31
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

Ordering Information

Part Number	012U88-33131-A3
Product Description	MIC [®] Tight-Buffered, Interlocking Armored Cable, Plenum, 12 F, ClearCurve [®] ZBL, Single-mode (OS2)
EAN Code	4056418224695



Corning Optical Communications RF LLC (Corning Gilbert) • 5310 W. Camelback Rd. • Glendale, AZ 85301 USA
800-528-5567 • FAX: 800-344-6358 • International: +1-623-245-1050 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications RF is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications RF is ISO 9001 certified. © 2016 Corning Optical Communications. All rights reserved.

Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-745-2675 • FAX: 828-325-5066 • International: +1-828-901-5000 • www.corning.com/opcomm

Page 3 | Revision date 2016-03-03

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

