

# MIC<sup>®</sup> Tight-Buffered, Interlocking Armored Cable, Plenum

18 F, 62.5 μm multimode (OM1)

CORNING

Corning MIC<sup>®</sup> interlocking armored plenum cables are designed for use in plenum, riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use individually jacketed 900 μm buffered fibers enabling easy, consistent stripping and facilitating termination. The fibers are grouped into jacketed subunits and surrounded by a dielectric central member.

The core is protected by a flexible, spirally wrapped, aluminum interlocking armor that offers easy, one-step installation and up to seven times the crush protection of unarmored cables. With a flame-retardant outer jacket, this cable is particularly useful for heavy traffic or more challenging mechanical exposure conditions and applications requiring extra rugged cables.

*This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

## Features and Benefits

### Flexible, interlocking armor design

Seven times crush protection compared to unarmored cables

### TBII buffered fibers

Easy, consistent stripping

### Flame-retardant jacket

Rugged and durable


## Standards

### Approvals and Listings


National Electrical Code<sup>®</sup> (NEC<sup>®</sup>) OFCP, CSA FT-6, ICEA S-83-596

### Flame Resistance

NFPA 262 (for plenum, riser and general building applications)

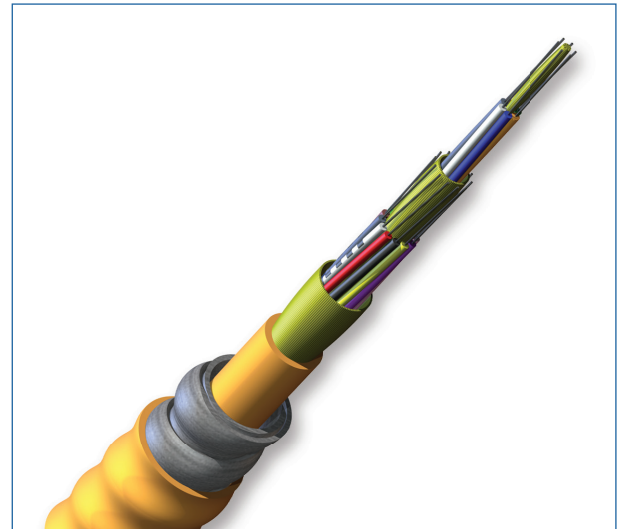

Part Number: 018K88-33130-A3

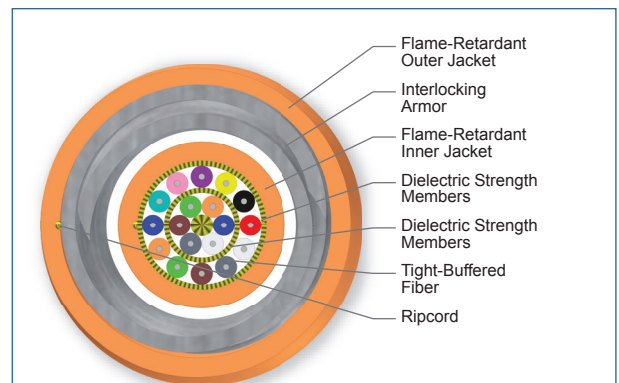

Cross Section of Part Number: 018K88-33130-A3

# MIC<sup>®</sup> Tight-Buffered, Interlocking Armored Cable, Plenum

18 F, 62.5 µm multimode (OM1)

CORNING

## Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser, Plenum
Cable Type	Tight-Buffered
Product Type	Interlocking armor
Flame Rating	Plenum (OFCP)
Fiber Category	62.5 µm MM (OM1)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (32 °F to 140 °F)
Operation	0 °C to 70 °C (32 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	18
Tight Buffer Color	Blue, Orange, Green, Brown, Slate, White
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tight Buffer Color, Layer 2	Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua, Blue*, Orange*, Green*
Tensile Strength Elements and/or Armoring - Layer 2	Dielectric strength members
Number of Ripcords	2
Inner Jacket Material	Flame-retardant
Tensile Strength Elements and/or Armoring - Layer 3	Interlocking armor
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Orange

Mechanical Characteristics Cable	
Weight	151 kg/km (102 lb/1000 ft)
Min. Bend Radius Installation	8.1 in (206 mm)
Nominal Inner Cable Diameter	7.4 mm (0.29 in)
Nominal Outer Diameter	13.7 mm (0.54 in)
Max. Tensile Strength, Short-Term	660 N (150 lbf)

# MIC<sup>®</sup> Tight-Buffered, Interlocking Armored Cable, Plenum

18 F, 62.5  $\mu$ m multimode (OM1)



## Mechanical Characteristics Cable

Max. Tensile Strength, Long-Term	200 N (45 lbf)
Min. Bend Radius Operation	137 mm (5.4 in)

## Ordering Information

Part Number	018K88-33130-A3
Product Description	MIC <sup>®</sup> Tight-Buffered, Interlocking Armored Cable, Plenum, 18 F, 62.5 $\mu$ m multimode (OM1)
EAN Code	4056418169361



Corning Comunicacoes Opticas • Estrada do Camorim 633 • Jacarepagua CEP 22780-070 • Rio De Janeiro, RJ Brazil  
+55 21 3416 5150 • FAX: +55 21 2441 2037 • [www.corning.com/opcomm/csa](http://www.corning.com/opcomm/csa)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.