


SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable

24 F, Single-mode (OS2)

CORNING

Corning SOLO® ADSS optical cables are all-dielectric, self-supporting (ADSS) cables designed for easy and economical one-step installation in campus backbones with self-supporting installations where metallic messengers cannot be used. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The cable design can span distances in excess of 500 m (1650 ft) in NESC heavy conditions.

This cable incorporates innovative waterblocking materials, eliminating the need for traditional flooding compound and providing efficient and craft-friendly cable preparation. While the concentric, self-supporting cable design allows easy, one-step installation using standard hardware and installation methods, the SZ-stranded, loose tube design isolates optical fibers from installation and environmental rigors and facilitates mid-span access. The ADSS optical cables are also available with a proprietary track-resistant polyethylene (TRPE) jacket suitable for installation in electric field potentials up to 25 kV.

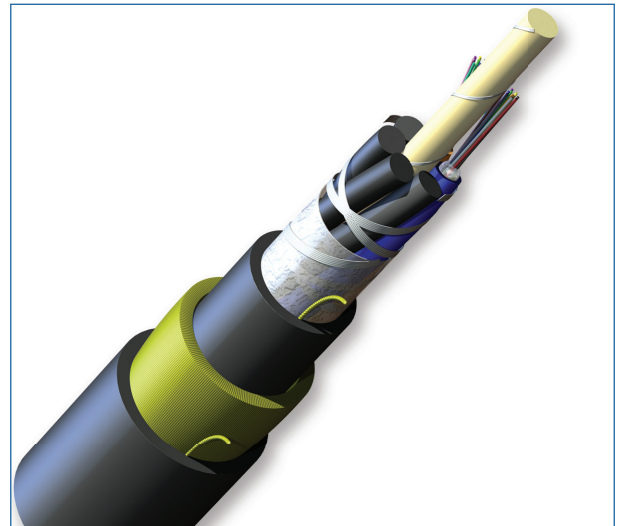

Part Number: 024EAE-T4C01A20

Features and Benefits

Loose tube design

Stable performance and compatibility with all common fiber types

Self-supporting


Easy, one-step installation

Track-resistant jacket available

Suitable for installations up to 25 kV electric field potential

Innovative waterblocking cable core

Provides efficient and craft-friendly cable preparation

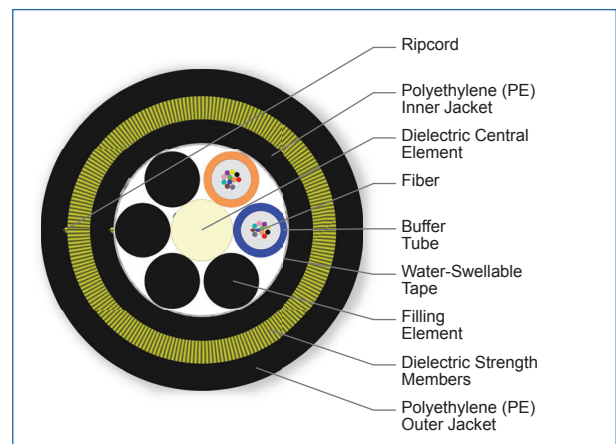

Cross Section of Part Number: 024EAE-T4C01A20

Standards

Approvals and Listings

USDA Rural Development Programs

Common Installations

Outdoor self-supporting aerial

Design and Test Criteria

ANSI/ICEA S-87-640

CORNING

SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable

24 F, Single-mode (OS2)

CORNING

Specifications

General Specifications	
Environment	Outdoor
Application	Self-Supporting
Cable Type	Loose Tube
Product Type	Self-Supporting
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 75 °C (-40 °F to 167 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	24
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	2
Buffer Tube Color Coding	Blue, Orange
Buffer Tube Diameter	2.85 mm (0.11 in)
Number of Filling Elements	4
Tape	Water-swellaable
Inner Jacket Material	Polyethylene (PE)
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Number of Ripcords	3
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Mechanical Characteristics Cable	
Weight	207 kg/km (139 lb/1000 ft)
Nominal Outer Diameter	16.8 mm (0.66 in)
Min. Bend Radius Installation	252 mm (9.9 in)

CORNING

SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable

24 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Min. Bend Radius Operation	168 mm (6.6 in)
Span Code	C

Installation Conditions

Span m (ft)	Initial Installation		NESC Light		NESC Medium		NESC Heavy	
	SAG %	Tension N (lbf)	SAG %	Tension N (lbf)	SAG %	Tension N (lbf)	SAG %	Tension N (lbf)
274 (900)	1	6960 (1566)	1.3	9996 (2249)	2.7	11720 (2673)	3.6	16653 (3747)
305 (1000)	1	7733 (1740)	1.4	10960 (2466)	2.8	12800 (2880)	3.7	18089 (4070)
335 (1100)	1	8507 (1914)	1.4	11911 (2680)	2.8	13867 (3120)	3.8	19493 (4386)
366 (1200)	1	9280 (2088)	1.4	12853 (2892)	2.9	14916 (3356)	3.9	20871 (4696)
396 (1300)	1	10053 (2262)	1.4	13787 (3102)	2.9	15951 (3589)	-	
427 (1400)	1	10831 (2437)	1.4	14707 (3309)	2.9	16973 (3819)	-	
457 (1500)	1	11604 (2611)	1.4	15622 (3515)	3	17982 (4046)	-	
488 (1600)	1	12378 (2785)	1.4	16529 (3719)	3	18982 (4271)	-	
518 (1700)	1	13151 (2959)	1.5	17431 (3922)	3	19978 (4495)	-	
549 (1800)	1	13924 (3133)	1.5	18324 (4123)	3.1	20960 (4716)	-	
579 (1900)	1	14698 (3307)	1.5	19218 (4324)	-		-	
610 (2000)	1	15471 (3481)	1.5	20102 (4523)	-		-	
640 (2100)	1	16244 (3655)	1.5	21245 (4721)	-		-	

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable

24 F, Single-mode (OS2)

CORNING

Ordering Information

Part Number	024EAE-T4C01A20
Product Description	SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable, Span Code C, 24 F, Single-mode (OS2)
EAN Code	4056418198538



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING