

MIC[®] Tight-Buffered Cable, Riser

24 F, 50 μ m multimode (OM2)

CORNING

Corning MIC[®] riser cables are designed for use in riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use 900 μ m buffered fibers to enable easy, consistent stripping and facilitate termination. The fibers are surrounded by dielectric strength members and protected by a flame-retardant outer jacket.

The all-dielectric cable construction requires no grounding or bonding, making these cables ideal for routing inside buildings including riser shafts, to the telecommunications rooms and workstations. The MIC Riser Cables meet the application requirements of the National Electrical Code[®] (NEC[®]) Article 770 and the ICEA S-83-596 test criteria. They are OFNR and FT-4 listed for riser and general-purpose use.

This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

Features and Benefits

900 μ m Buffered Fibers

Easy, consistent stripping

All-dielectric construction

Requires no grounding or bonding

Flame-retardant jacket

Rugged and durable



Standards

Listings

National Electrical Code[®]
(NEC[®]) OFNR, FT-4

Design and Test Criteria

UL-1666 and CSA FT-4 (for riser and general building applications); ICEA S-83-596

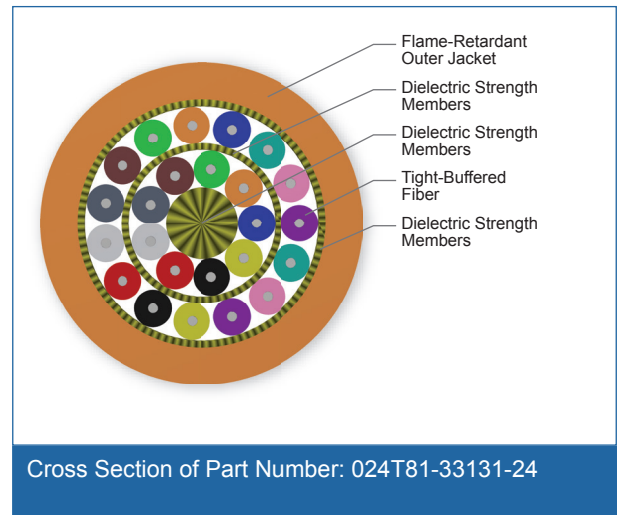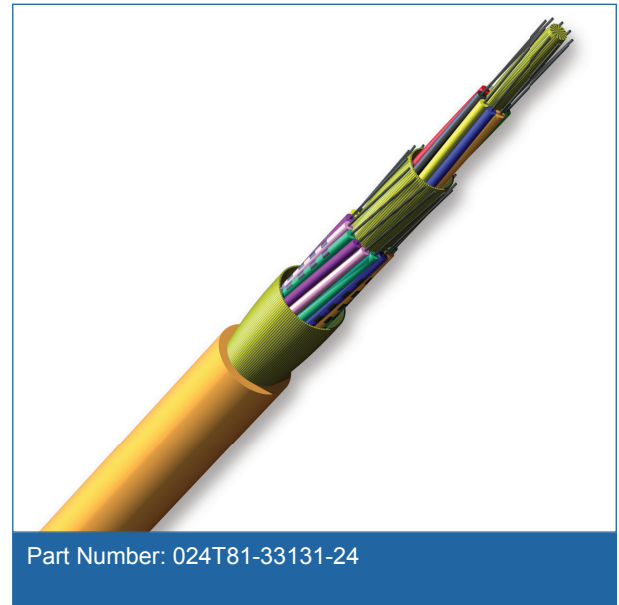

MIC[®] Tight-Buffered Cable, Riser

24 F, 50 µm multimode (OM2)

CORNING

Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser
Cable Type	Tight-Buffered
Product Type	Distribution
Flame Rating	Riser (OFNR)
Fiber Category	50 µm MM (OM2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	24
Tight Buffer Color	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tight Buffer Color, Layer 2	Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*, Slate*, White*, Red*, Black*, Yellow*, Violet*, Rose*, Aqua*
Tensile Strength Elements and/or Armoring - Layer 2	Dielectric strength members
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Orange

Mechanical Characteristics Cable	
Max. Tensile Strength, Short-Term, ≤12F	660 N (150 lbf)
Max. Tensile Strength, Short-Term, >12F	1320 N (300 lbf)
Max. Tensile Strength, Long-Term, ≤12F	200 N (45 lbf)
Max. Tensile Strength, Long-Term, >12F	400 N (90 lbf)
Nominal Outer Diameter	7.35 mm (0.29 in)
Weight	47.0 kg/km (28.88 lb/1000 ft)
Min. Bend Radius Installation	110.25 mm (4.34 in)
Min. Bend Radius Operation	73.5 mm (2.89 in)

MIC[®] Tight-Buffered Cable, Riser

24 F, 50 µm multimode (OM2)



Fiber Specifications

Optical Characteristics (cabled)	
Fiber Core Diameter	50 µm
Fiber Category	OM2
Fiber Code	T
Performance Option Code	31
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	750 m / 600 m
Serial 10 Gigabit Ethernet	150 m / -
Min. Overfilled Launch (OFL) Bandwidth	700 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	950 MHz*km / -

Ordering Information

Part Number	024T81-33131-24
Product Description	MIC [®] Tight-Buffered Cable, Riser, 24 F, 50 µm multimode (OM2)
EAN Code	4056418179421



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

