

ADSS Aramid Single Jacket Cable up to 100m span LT 2.3 ADSS Aramid Single Jacket Cable up to 100m span LT 2.3

CORNING

Part Number:
024ZF4-T3S20A20

Corning single jacket ADSS cables for short span application are all-dielectric, self-supporting (ADSS) cables designed for easy and economical one-step installation in campus backbones with self-supporting installations where metallic messengers cannot be used. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The economical single-jacket design can span distances up to 100m in NESC light/medium conditions and 50m in NESC heavy conditions (see sag and tension chart for details).

This cable incorporates innovative waterblocking materials, eliminating the need for traditional flooding compound and providing efficient and craft-friendly cable preparation. While the concentric, self-supporting cable design allows easy, one-step installation using standard hardware and installation methods, the SZ-stranded, loose tube design isolates optical fibres from installation and environmental rigors and facilitates mid-span access. These ADSS optical cables are available with HDPE jacket for installation in telecom applications.

Features and Benefits

All dielectric self-supporting aerial cable

Non-metallic strength members over the cable core


Dry cable core by swellable elements

Single-layer stranded construction up to 144 fibers

Single-mode fibers fully compliant to standard ITU G.652 D (reduced OH- peak) showing low attenuation throughout the 1285 nm to 1625 nm wavelength range

Telcordia standard for fiber and loose tube coloring

Cable design according to CORNING standard

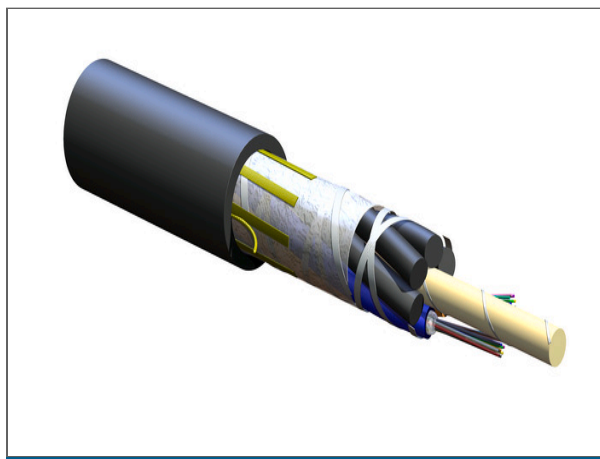

024ZF4-T3S20A20

ADSS Aramid Single Jacket Cable up to 100m span LT 2.3

ADSS Aramid Single Jacket Cable up to 100m span LT 2.3

CORNING

Specifications

Mechanical Specifications

Crush Resistance	2000 N/10 cm
Max. Tensile Strength, Long-Term	2770 N
Max. Tensile Strength, Short-Term	4600 N
Min. Bend Radius Installation	158 mm
Min. Bend Radius Operation	210 mm
Nominal Outer Diameter	10.5 mm
Ultimate Tensile Strength	8000 N
Impact Testing acc. IEC 69794-1-2 E4, 5 J, $\Delta L \geq 0.5$ m	3 impact(s)

Cable Design

Cable Marking	Meter Handset Sine CORNING Fiber Optic Cable YearADSS CABLE A-DQ(T)2Y 2X12 E9U LT2.3 UP TO 100M
Central Element	Dielectric
Fiber Count	24
Buffer Tube Color Coding	Blue, Orange
Outer Jacket Color	Black
Outer Jacket Material	High Density Polyethylene (HDPE)
Buffer Tube Color	Blue, Orange
Number of Active Tubes	2
Number of Tube Positions	6
Cable Marking Method	Hotfoil printing
Cable Marking Color	White
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12

ADSS Aramid Single Jacket Cable up to 100m span LT 2.3

ADSS Aramid Single Jacket Cable up to 100m span LT 2.3

CORNING

Environmental Conditions

Temperature Range, Installation	-5 °C to 50 °C
Temperature Range, Storage	-40 °C to 70 °C
Halogen-free	Yes
Temperature Range, Operation	-40 °C to 70 °C

General Specifications

Environment	Outdoor
Cable Type	Loose Tube
Fiber Category	SMF-28® Ultra fiber

Ordering Information

Weight	84 kg/km
--------	----------

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Optical Characteristics

Cable cutoff wavelength	1260 nm
Fiber Code	Z
Fiber Name	SMF-28® Ultra fiber
Fiber Type	Single-mode
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1
Fiber Core Diameter	8.2 µm
Cladding diameter	125 µm
Dispersion @ 1550 nm	18 nm
Dispersion @ 1625 nm	22 nm

ADSS Aramid Single Jacket Cable up to 100m span LT 2.3 ADSS Aramid Single Jacket Cable up to 100m span LT 2.3

CORNING

Optical Characteristics

Maximum Attenuation	0.34 dB/km / 0.34 dB/km / 0.20 dB/km
Mode-Field Diameter at 1310 nm	9.2 μ m
Typical Attenuation	0.32 / 0.32 / 0.18
Wavelengths	1310 nm / 1383 nm / 1550 nm
PMD Link Design Value	0.04 ps/(nm*km)
PMD maximum individual fiber	0.1 ps/(nm*km)
Coating diameter	242 μ m
Fiber Category	OS2

Installation Characteristics

	Initial Installation		NESC Light		NESC Medium		NESC Heavy	
Span	SAG	Tension	SAG	Tension	SAG	Tension	SAG	Tension
Fiber Count 24								
50 m	1.1 %	467 N	3.1 %	1,252 N	3.5 %	1,599 N	4.2 %	2,345 N
100 m	1.1 %	933 N	3.6 %	2,164 N	4.1 %	2,715 N		



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2020 Corning Optical Communications. All rights reserved.