


# Ribbon Cable, Riser

36 F, Single-mode (OS2)

CORNING

Corning ribbon riser cables are all-dielectric and designed for indoor use. The optical fibers are organized into easily identifiable 12-fiber ribbons inside a central tube. The required tensile strength is provided by dielectric strength elements that are helically stranded around the central tube. The specially formulated, flame-retardant outer jacket and rugged construction of these cables facilitates routing through riser shafts and long horizontal runs inside buildings. These cables are tested using the UL 1666 flame test, meet the application requirements of the National Electrical Code (NEC) and are OFNR and FT-4 listed.

*This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

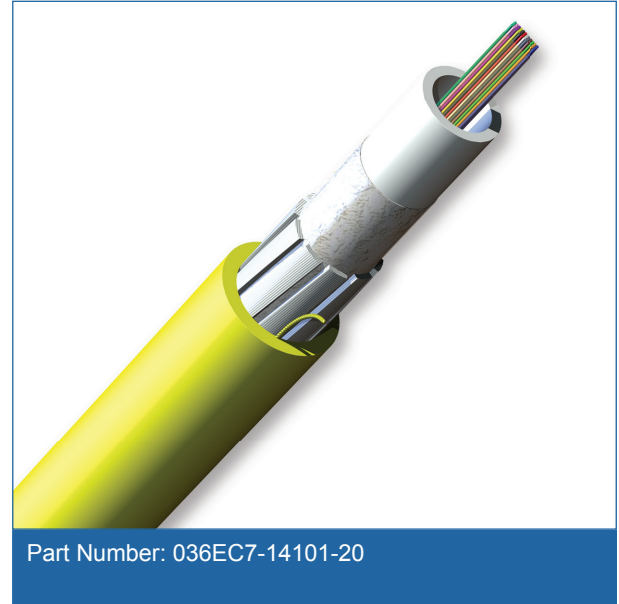

## Features and Benefits

### Precise fiber and ribbon geometries

Excellent mass splicing yields

### Ribbon ID numbers and fiber colors


Easily identifiable

### Flame-retardant jacket

Rugged and durable

### Common installations

Indoor vertical riser and general purpose horizontal according to National Electrical Code® (NEC®) Article 770

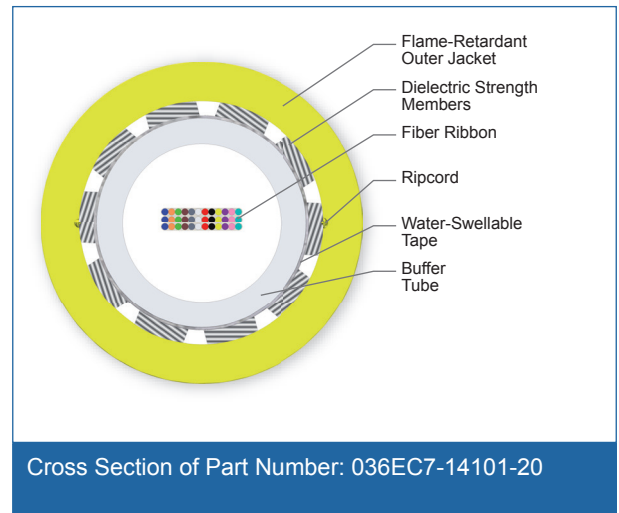

## Standards

### Listings

National Electrical Code® (NEC®) OFNR

### Design Criteria

CSA FT-4

### Test Criteria

ANSI/ICEA S-83-596

CORNING

# Ribbon Cable, Riser

36 F, Single-mode (OS2)

CORNING

## Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser
Cable Type	Ribbon
Product Type	Distribution
Flame Rating	Riser (OFNR)
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

Cable Design	
Fiber Count	36
Ribbons per Tube	2
Fibers per Ribbon	12
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Buffer Tube Color	Natural
Buffer Tube Diameter	8.1 mm (0.32 in)
Tape	Water-swellable
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Number of Ripcords	2
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Yellow

Mechanical Characteristics Cable	
Max. Tensile Strength, Short-Term	1320 N (300 lbf)
Max. Tensile Strength, Long-Term	400 N (90 lbf)
Min. Bend Radius Installation	146 mm (5.7 in)
Min. Bend Radius Operation	97 mm (3.8 in)
Weight	88.8 kg/km (59.7 lb/1000 ft)
Nominal Outer Diameter	9.7 mm (0.38 in)

CORNING

# Ribbon Cable, Riser

36 F, Single-mode (OS2)



## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

## Ordering Information

Part Number	036EC7-14101-20
Product Description	Ribbon Cable, Riser, 36 F, Single-mode (OS2)
EAN Code	4056418190679



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

Corning Optical Communications RF LLC (Corning Gilbert) • 5310 W. Camelback Rd. • Glendale, AZ 85301 USA

800-528-5567 • FAX: 900-434-6358 • International: +1-623-245-1050 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

Page 3 | Revision date 2016-03-03

A complete listing of the trademarks of Corning Optical Communications RF is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications RF is ISO 9001

