

ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

36 F, 62.5 μm multimode (OM1)

CORNING

Corning ALTOS® Lite™ double-jacket, double-armored cables are rugged cables designed for direct-buried installations. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

Features and Benefits

Two jacket layers and two steel tape armor layers

Provides superior rodent resistance for direct-buried applications

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Cable core features innovative waterblocking technology

Eliminates the need for traditional flooding compound and provides efficient and craft-friendly cable preparation

Medium-density polyethylene jacket

Makes cable rugged and durable while being flexible and easy to strip



Exceeds the RDUP requirements for mid-span buffer tube slack storage

Provides flexibility for mid-span access applications

Standards

Approvals and Listings USDA Rural Development Programs

Design and Test Criteria Telcordia GR-20, ICEA-640

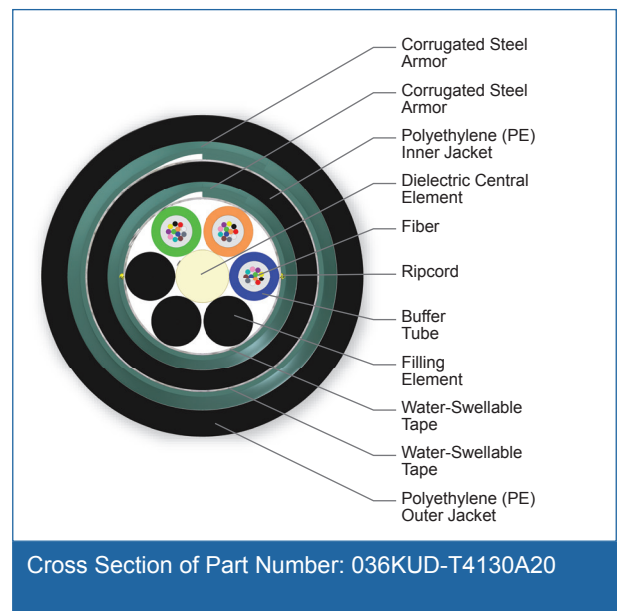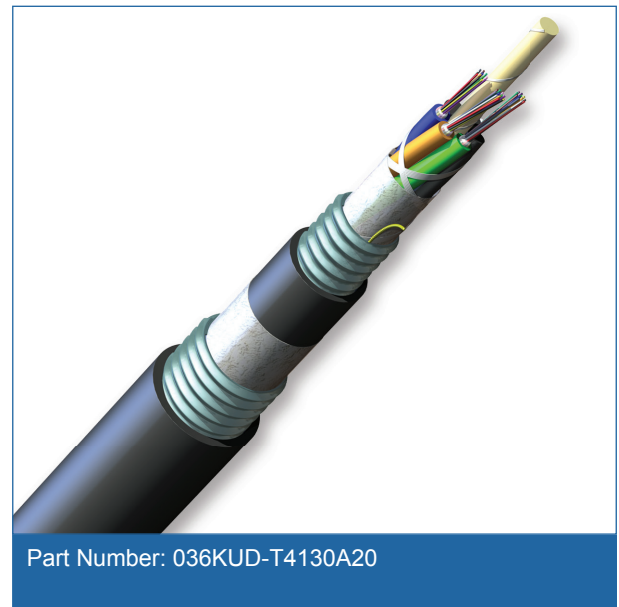

ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

36 F, 62.5 µm multimode (OM1)

CORNING

Specifications

General Specifications	
Environment	Outdoor
Application	Direct Buried
Cable Type	Loose Tube
Product Type	Armored
Fiber Category	62.5 µm MM (OM1)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	36
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	3
Buffer Tube Color Coding	Blue, Orange, Green
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellaable
Number of Filling Elements	3
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 2	Water-swellaable
Number of Ripcords	4
Tensile Strength Elements and/or Armoring - Layer 2	Corrugated steel tape armor
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

36 F, 62.5 µm multimode (OM1)

CORNING

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	255 kg/km (171 lb/1000 ft)
Nominal Outer Diameter	16.1 mm (0.63 in)
Min. Bend Radius Installation	242 mm (9.5 in)
Min. Bend Radius Operation	161 mm (6.3 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

Ordering Information

Part Number	036KUD-T4130A20
Product Description	ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable, 36 F, 62.5 µm multimode (OM1)

ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

36 F, 62.5 µm multimode (OM1)

The CORNING logo is a blue square with the word "CORNING" in white, uppercase, sans-serif font centered inside.

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

The CORNING logo is the word "CORNING" in a large, black, uppercase, sans-serif font.