


# MIC<sup>®</sup> 250 Interlocking Armored Distribution Cable, Plenum

36 F, 50 μm multimode (OM4)

CORNING

Corning MIC<sup>®</sup> 250 cables utilize 250 μm color-coded optical fibers surrounded by dielectric strength members with a flexible, flame-retardant outer jacket. These cables are ideal for creating multifiber preconnectorized assemblies as the 12-fiber groupings enable efficient compatibility with multifiber connectors. The flexible, flame-retardant jacket and non-preferential bend axis allow easy installation in space-constrained areas. The core is protected by a flexible, spirally-wrapped, aluminum interlocking armor that offers easy, one-step installation.

*This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

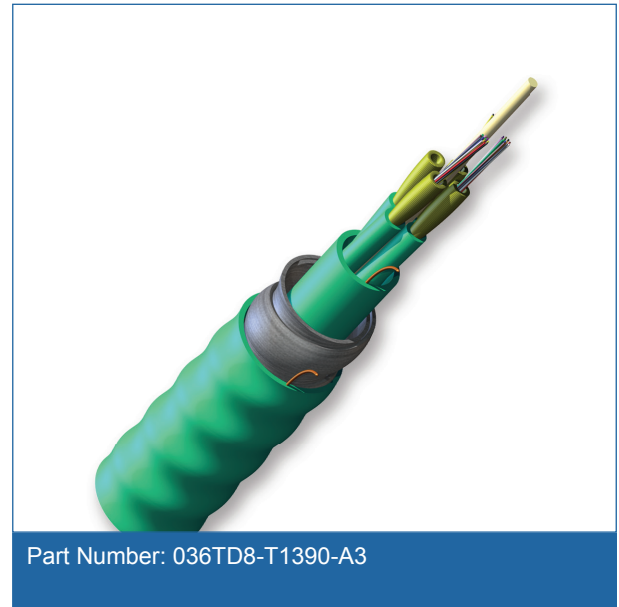

## Features and Benefits

### Color-coded fibers

Quick and easy identification

### 12-fiber groupings

Compatibility with multifiber connectors

## Standards

### Listings


National Electrical Code<sup>®</sup>  
(NEC<sup>®</sup>) OFCP, FT-6, IEC  
S-83-596

### Design and Test Criteria

CSA FT-6

### Flame Resistance

NFPA 262 (for plenum, riser and general building applications)

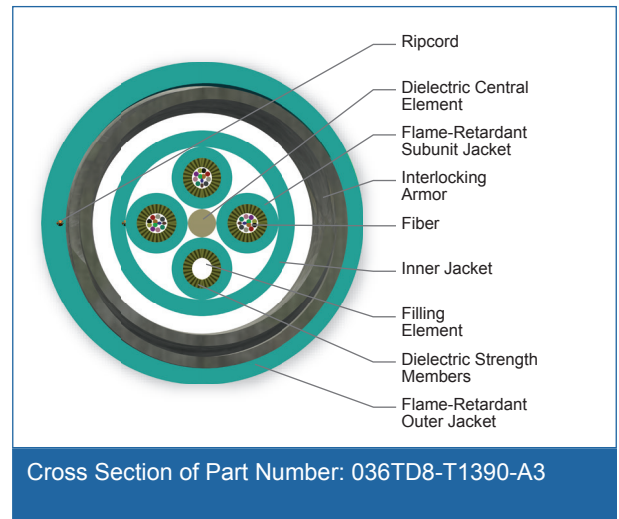

# MIC<sup>®</sup> 250 Interlocking Armored Distribution Cable, Plenum

36 F, 50 µm multimode (OM4)

CORNING

## Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser, Plenum
Cable Type	Loose Tube
Product Type	Distribution
Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM4)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (32 °F to 140 °F)
Operation	0 °C to 70 °C (32 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	36
Fibers per Subunit	12
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Subunit Jacket Material	Flame-retardant
Subunit Color	Aqua
Number of Subunits	4
Number of Ripcords	1
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Aqua
Number of Filling Elements	1

Mechanical Characteristics Cable	
Weight	202.82 kg/km (136.28 lb/1000 ft)
Nominal Outer Diameter	15.7 mm (0.61 in)
Max. Tensile Strength, Short-Term	660 N (150 lbf)
Max. Tensile Strength, Long-Term	200 N (45 lbf)

# MIC<sup>®</sup> 250 Interlocking Armored Distribution Cable, Plenum

36 F, 50 µm multimode (OM4)

CORNING

## Mechanical Characteristics Cable

Min. Bend Radius Installation	235.5 mm (9.27 in)
Min. Bend Radius Operation	157 mm (6.18 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	50 µm
Fiber Category	OM4
Fiber Code	T
Performance Option Code	90
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.0 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	1100 m / 600 m
Serial 10 Gigabit Ethernet	550 m / -
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	4700 MHz*km / -

\* Assumes 1.0 dB maximum total connector/splice loss.

\* Meets 0.75 ns optical skew when used in all Corning Plug and Play™/EDGE™ systems solutions.

Notes: 1) 50 µm multimode fiber macrobend loss ≤ 0.2 dB at 850 nm for two turns around 7.5 mm radius mandrel.  
2) Improved attenuation and bandwidth options available.  
3) Bend-insensitive single-mode fibers available on request.  
4) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	036TD8-T1390-A3
Product Description	MIC <sup>®</sup> 250 Distribution Cable, Plenum, Interlocking Armor, 36 F, 50 µm multimode (OM4)
EAN Code	4056418160191

# MIC<sup>®</sup> 250 Interlocking Armored Distribution Cable, Plenum

36 F, 50  $\mu$ m multimode (OM4)

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

## Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.