


Ribbon Cable, Riser

48 F, 62.5 μm multimode (OM1)

CORNING

Corning ribbon riser cables are all-dielectric and designed for indoor use. The optical fibers are organized into easily identifiable 12-fiber ribbons inside a central tube. The required tensile strength is provided by dielectric strength elements that are helically stranded around the central tube. The specially formulated, flame-retardant outer jacket and rugged construction of these cables facilitates routing through riser shafts and long horizontal runs inside buildings. These cables are tested using the UL 1666 flame test, meet the application requirements of the National Electrical Code (NEC) and are OFNR and FT-4 listed.

This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

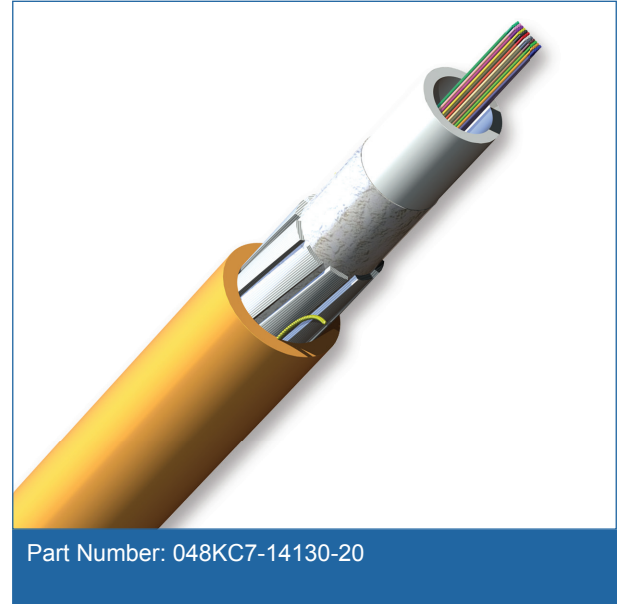

Features and Benefits

Precise fiber and ribbon geometries

Excellent mass splicing yields

Ribbon ID numbers and fiber colors


Easily identifiable

Flame-retardant jacket

Rugged and durable

Common installations

Indoor vertical riser and general purpose horizontal according to National Electrical Code® (NEC®) Article 770

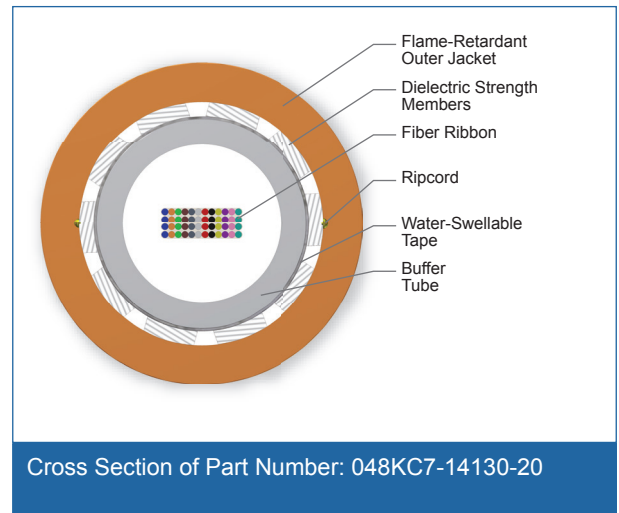

Standards

Listings

National Electrical Code® (NEC®) OFNR

Design Criteria

CSA FT-4

Test Criteria

ANSI/ICEA S-83-596

CORNING

Ribbon Cable, Riser

48 F, 62.5 μ m multimode (OM1)

CORNING

Specifications

| General Specifications | |
|------------------------|--|
| Environment | Indoor |
| Application | General Purpose Horizontal, Vertical Riser |
| Cable Type | Ribbon |
| Product Type | Distribution |
| Flame Rating | Riser (OFNR) |
| Fiber Category | 62.5 μ m MM (OM1) |

| Temperature Range | |
|-------------------|------------------------------------|
| Storage | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | -10 °C to 60 °C (14 °F to 140 °F) |
| Operation | -20 °C to 70 °C (-4 °F to 158 °F) |

| Cable Design | |
|---|--|
| Fiber Count | 48 |
| Ribbons per Tube | 4 |
| Fibers per Ribbon | 12 |
| Fiber Coloring | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Buffer Tube Color | Natural |
| Buffer Tube Diameter | 8.1 mm (0.32 in) |
| Tape | Water-swellable |
| Tensile Strength Elements and/or Armoring - Layer 1 | Dielectric strength members |
| Number of Ripcords | 2 |
| Outer Jacket Material | Flame-retardant |
| Outer Jacket Color | Orange |

| Mechanical Characteristics Cable | |
|-----------------------------------|----------------------------|
| Max. Tensile Strength, Short-Term | 1320 N (300 lbf) |
| Max. Tensile Strength, Long-Term | 400 N (90 lbf) |
| Min. Bend Radius Installation | 146 mm (5.7 in) |
| Min. Bend Radius Operation | 97 mm (3.8 in) |
| Weight | 98 kg/km (70.8 lb/1000 ft) |
| Nominal Outer Diameter | 9.7 mm (0.38 in) |

CORNING

Ribbon Cable, Riser

48 F, 62.5 µm multimode (OM1)

CORNING

Chemical Characteristics

| | |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|---|

Fiber Specifications

Optical Characteristics (cabled)

| | |
|---|-------------------------|
| Fiber Core Diameter | 62.5 µm |
| Fiber Category | OM1 |
| Fiber Code | K |
| Performance Option Code | 30 |
| Wavelengths | 850 nm / 1300 nm |
| Maximum Attenuation | 3.4 dB/km / 1.0 dB/km |
| Serial 1 Gigabit Ethernet | 300 m / 550 m |
| Serial 10 Gigabit Ethernet | 33 m / - |
| Min. Overfilled Launch (OFL) Bandwidth | 200 MHz*km / 500 MHz*km |
| Minimum Effective Modal Bandwidth (EMB) | 220 MHz*km / - |

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

Ordering Information

| | |
|---------------------|--|
| Part Number | 048KC7-14130-20 |
| Product Description | Ribbon Cable, Riser, 48 F, 62.5 µm multimode (OM1) |
| EAN Code | 4056418190532 |



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING