


SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable

60 F, Single-mode (OS2)

CORNING

Corning SOLO® ADSS optical cables are all-dielectric, self-supporting (ADSS) cables designed for easy and economical one-step installation in campus backbones with self-supporting installations where metallic messengers cannot be used. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The cable design can span distances in excess of 500 m (1650 ft) in NESC heavy conditions.

This cable incorporates innovative waterblocking materials, eliminating the need for traditional flooding compound and providing efficient and craft-friendly cable preparation. While the concentric, self-supporting cable design allows easy, one-step installation using standard hardware and installation methods, the SZ-stranded, loose tube design isolates optical fibers from installation and environmental rigors and facilitates mid-span access. The ADSS optical cables are also available with a proprietary track-resistant polyethylene (TRPE) jacket suitable for installation in electric field potentials up to 25 kV.

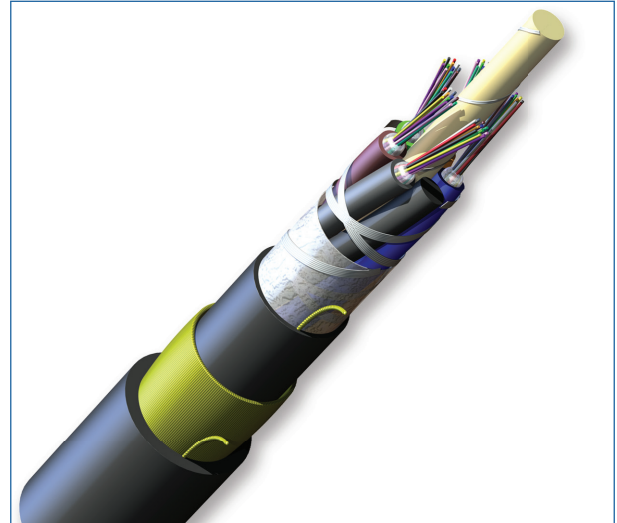

Part Number: 060EAE-T4201A20

Features and Benefits

Loose tube design

Stable performance and compatibility with all common fiber types

Self-supporting


Easy, one-step installation

Track-resistant jacket available

Suitable for installations up to 25 kV electric field potential

Innovative waterblocking cable core

Provides efficient and craft-friendly cable preparation

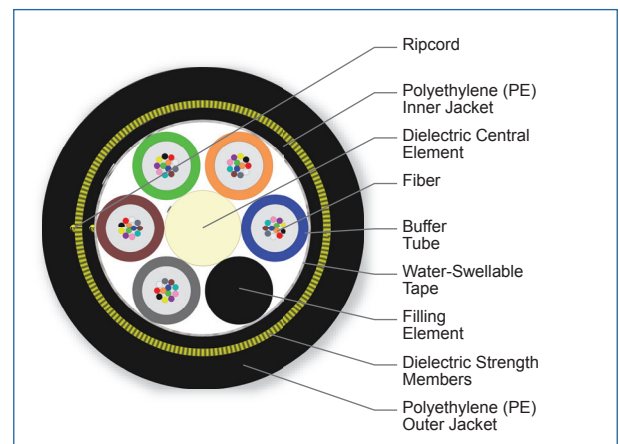

Cross Section of Part Number: 060EAE-T4201A20

Standards

Approvals and Listings	USDA Rural Development Programs
Common Installations	Outdoor self-supporting aerial
Design and Test Criteria	ANSI/ICEA S-87-640

CORNING

SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable

60 F, Single-mode (OS2)

CORNING

Specifications

General Specifications	
Environment	Outdoor
Application	Self-Supporting
Cable Type	Loose Tube
Product Type	Self-Supporting
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 75 °C (-40 °F to 167 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	60
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	5
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate
Buffer Tube Diameter	2.85 mm (0.11 in)
Number of Filling Elements	1
Tape	Water-swellaable
Inner Jacket Material	Polyethylene (PE)
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Number of Ripcords	3
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Mechanical Characteristics Cable	
Weight	138 kg/km (93 lb/1000 ft)
Nominal Outer Diameter	13.5 mm (0.53 in)
Min. Bend Radius Installation	203 mm (8.0 in)

CORNING

SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable

60 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Min. Bend Radius Operation	135 mm (5.3 in)
Span Code	2

Installation Conditions

Span m (ft)	Initial Installation		NESC Light		NESC Medium		NESC Heavy	
	SAG %	Tension N (lbf)	SAG %	Tension N (lbf)	SAG %	Tension N (lbf)	SAG %	Tension N (lbf)
30 (100)	1	511 (115)	1.1	1098 (247)	2.2	1404 (316)	2.8	2151 (484)
61 (200)	1	1022 (230)	1.3	1960 (441)	2.5	2458 (553)	3.3	3649 (821)
91 (300)	1	1538 (346)	1.4	2742 (617)	2.7	3391 (763)	3.7	4951 (1114)
122 (400)	1	2049 (461)	1.4	3478 (783)	2.9	4253 (957)	3.9	6152 (1384)
152 (500)	1	2560 (576)	1.5	4178 (940)	3.1	5076 (1142)	-	
183 (600)	1	3071 (691)	1.6	4853 (1092)	3.2	5862 (1319)	-	
213 (700)	1	3582 (806)	1.6	5516 (1241)	3.3	6622 (1490)	-	
244 (800)	1	4093 (921)	1.6	6160 (1386)	-		-	
274 (900)	1	4611 (1037)	1.7	6796 (1529)	-		-	

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

CORNING

SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable

60 F, Single-mode (OS2)

CORNING

Ordering Information

Part Number	060EAE-T4201A20
Product Description	SOLO® ADSS Loose Tube, Gel-Filled, Dual-Jacket Cable, Span Code 2, 60 F, Single-mode (OS2)
EAN Code	4056418164113



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING