

ALTOS® Low-Temperature, Loose Tube, Gel-Filled Cable

60 F, 62.5 μm multimode (OM1)

CORNING

Corning ALTOS® low-temperature cables are designed for extreme cold temperature environments with an extended operating range of -50° to +70°C (-58° to +158°F). Dielectric and armored jackets allow for duct, direct-buried or aerial (lashed) installation.

Features and Benefits

Extended operating temperature range of -50° to +70°C (-58° to +158°F)

Allows for operation at extreme low temperatures

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Innovative waterblocking design

Provides efficient and craft-friendly cable preparation

SZ-stranded, loose tube design

Isolates fibers from installation and environmental rigors and facilitates mid-span access

Dielectric central strength member

No preferential bend and requires no bonding or grounding

Medium-density polyethylene jacket



Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

Standards

Approvals and Listings USDA Rural Development Programs

Common Installations Designed for Duct and Aerial Applications

Design and Test Criteria Telcordia GR-20, ICEA-640

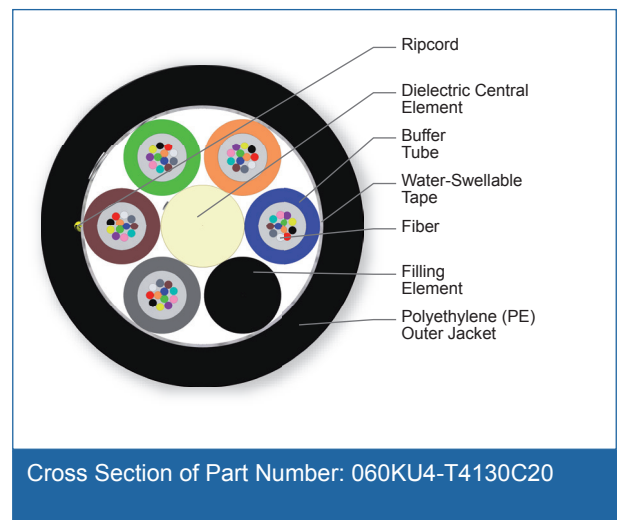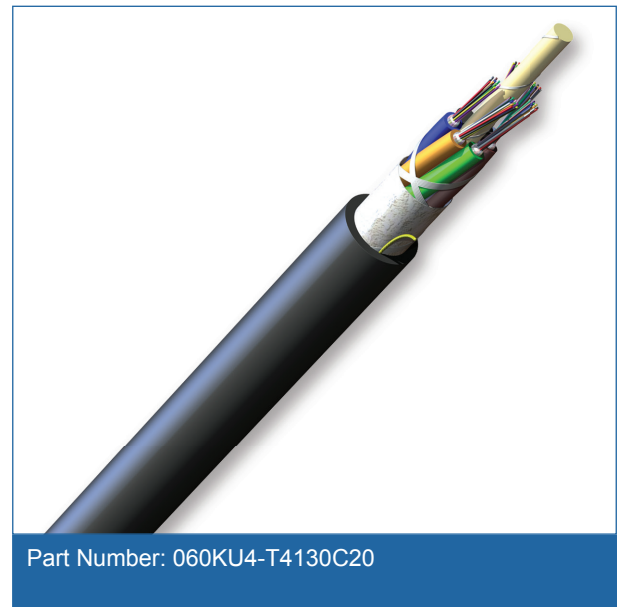

Specifications

| General Specifications | |
|------------------------|--------------|
| Environment | Outdoor |
| Application | Aerial, Duct |
| Cable Type | Loose Tube |

ALTOS[®] Low-Temperature, Loose Tube, Gel-Filled Cable

60 F, 62.5 µm multimode (OM1)

CORNING

General Specifications

| | |
|----------------|------------------|
| Product Type | Dielectric |
| Fiber Category | 62.5 µm MM (OM1) |

Temperature Range

| | |
|--------------|------------------------------------|
| Storage | -50 °C to 70 °C (-58 °F to 158 °F) |
| Installation | -30 °C to 70 °C (-22 °F to 158 °F) |
| Operation | -50 °C to 70 °C (-58 °F to 158 °F) |

Cable Design

| | |
|----------------------------|--|
| Central Element | Dielectric |
| Fiber Count | 60 |
| Fiber Coloring | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Fibers per Tube | 12 |
| Number of Tube Positions | 6 |
| Number of Active Tubes | 5 |
| Buffer Tube Color Coding | Blue, Orange, Green, Brown, Slate |
| Buffer Tube Diameter | 2.5 mm (0.1 in) |
| Number of Filling Elements | 1 |
| Tape | Water-swellable |
| Number of Ripcords | 2 |
| Outer Jacket Material | Polyethylene (PE) |
| Outer Jacket Color | Black |

Mechanical Characteristics Cable

| | |
|-----------------------------------|--------------------------|
| Max. Tensile Strength, Short-Term | 2700 N (600 lbf) |
| Max. Tensile Strength, Long-Term | 890 N (200 lbf) |
| Weight | 80 kg/km (54 lb/1000 ft) |
| Nominal Outer Diameter | 10.5 mm (0.41 in) |
| Min. Bend Radius Installation | 158 mm (6.2 in) |
| Min. Bend Radius Operation | 105 mm (4.1 in) |

ALTOS® Low-Temperature, Loose Tube, Gel-Filled Cable

60 F, 62.5 µm multimode (OM1)

CORNING

Chemical Characteristics

| | |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|---|

Fiber Specifications

Optical Characteristics (cabled)

| | |
|---|-------------------------|
| Fiber Core Diameter | 62.5 µm |
| Fiber Category | OM1 |
| Fiber Code | K |
| Performance Option Code | 30 |
| Wavelengths | 850 nm / 1300 nm |
| Maximum Attenuation | 3.4 dB/km / 1.0 dB/km |
| Serial 1 Gigabit Ethernet | 300 m / 550 m |
| Serial 10 Gigabit Ethernet | 33 m / - |
| Min. Overfilled Launch (OFL) Bandwidth | 200 MHz*km / 500 MHz*km |
| Minimum Effective Modal Bandwidth (EMB) | 220 MHz*km / - |

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

Ordering Information

| | |
|---------------------|---|
| Part Number | 060KU4-T4130C20 |
| Product Description | ALTOS® Low-Temperature, Loose Tube, Gel-Filled Cable, 60 F, 62.5 µm multimode (OM1) |
| EAN Code | 4056418158952 |



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2017 Corning Optical Communications. All rights reserved.

CORNING