

ALTOS® Loose Tube, Gel-Filled, Double-Jacket Cable

60 F, 62.5 µm multimode (OM1)

CORNING

Corning ALTOS® double-jacket dielectric cables are designed for duct and aerial (lashed) installation. The double-jacket construction adds a layer of protection for harsh environments. The loose tube cable design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

Features and Benefits

Two jacket layers

Provides extra protection in harsh environments

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Innovative waterblocking design

Provides efficient and craft-friendly cable preparation

Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

Exceeds the RDUP requirements for mid-span buffer tube slack storage

Provides flexibility for mid-span access applications



Standards

Approvals and Listings

USDA Rural Development Programs

Design and Test Criteria

Telcordia GR-20, ICEA-640

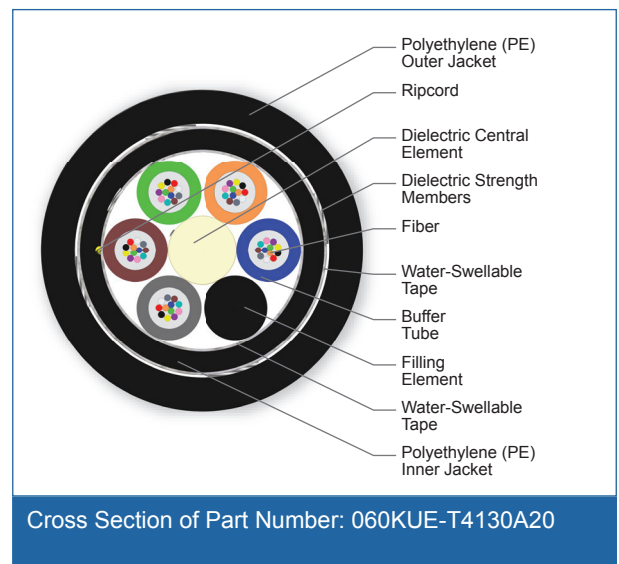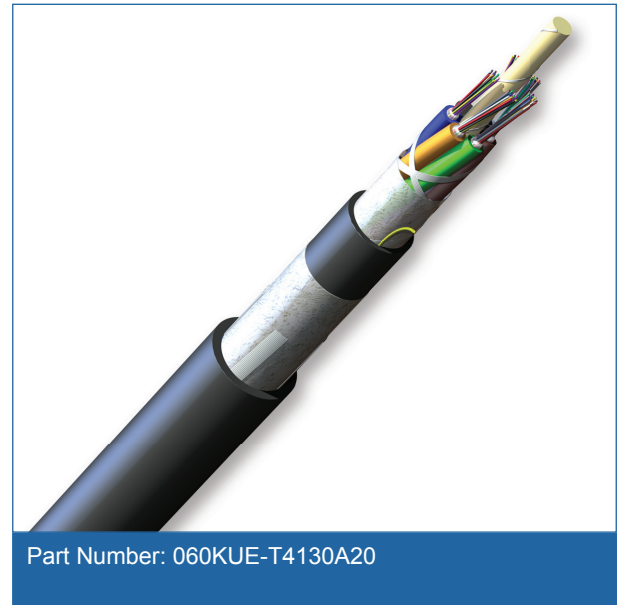

ALTOS® Loose Tube, Gel-Filled, Double-Jacket Cable

60 F, 62.5 µm multimode (OM1)

CORNING

Specifications

General Specifications

| | |
|----------------|------------------|
| Environment | Outdoor |
| Application | Aerial, Duct |
| Cable Type | Loose Tube |
| Product Type | Dielectric |
| Fiber Category | 62.5 µm MM (OM1) |

Temperature Range

| | |
|--------------|------------------------------------|
| Storage | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | -30 °C to 70 °C (-22 °F to 158 °F) |
| Operation | -40 °C to 70 °C (-40 °F to 158 °F) |

Cable Design

| | |
|---|--|
| Central Element | Dielectric |
| Fiber Count | 60 |
| Fiber Coloring | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Fibers per Tube | 12 |
| Number of Tube Positions | 6 |
| Number of Active Tubes | 5 |
| Buffer Tube Color Coding | Blue, Orange, Green, Brown, Slate |
| Buffer Tube Diameter | 2.5 mm (0.1 in) |
| Number of Filling Elements | 1 |
| Tape | Water-swellaable |
| Inner Jacket Material | Polyethylene (PE) |
| Tape, Layer 2 | Water-swellaable |
| Number of Ripcords | 1 |
| Tensile Strength Elements and/or Armoring - Layer 1 | Dielectric strength members |
| Outer Jacket Material | Polyethylene (PE) |
| Outer Jacket Color | Black |
| Maximum Fibers per Tube | 12 |

CORNING

ALTOS® Loose Tube, Gel-Filled, Double-Jacket Cable

60 F, 62.5 µm multimode (OM1)

CORNING

Mechanical Characteristics Cable

| | |
|-----------------------------------|---------------------------|
| Max. Tensile Strength, Short-Term | 2700 N (600 lbf) |
| Max. Tensile Strength, Long-Term | 890 N (200 lbf) |
| Weight | 114 kg/km (76 lb/1000 ft) |
| Nominal Outer Diameter | 12.5 mm (0.49 in) |
| Min. Bend Radius Installation | 188 mm (7.4 in) |
| Min. Bend Radius Operation | 125 mm (4.9 in) |

Chemical Characteristics

| | |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|---|

Fiber Specifications

Optical Characteristics (cabled)

| | |
|---|-------------------------|
| Fiber Core Diameter | 62.5 µm |
| Fiber Category | OM1 |
| Fiber Code | K |
| Performance Option Code | 30 |
| Wavelengths | 850 nm / 1300 nm |
| Maximum Attenuation | 3.4 dB/km / 1.0 dB/km |
| Serial 1 Gigabit Ethernet | 300 m / 550 m |
| Serial 10 Gigabit Ethernet | 33 m / - |
| Min. Overfilled Launch (OFL) Bandwidth | 200 MHz*km / 500 MHz*km |
| Minimum Effective Modal Bandwidth (EMB) | 220 MHz*km / - |

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

Ordering Information

| | |
|---------------------|---|
| Part Number | 060KUE-T4130A20 |
| Product Description | ALTOS® Loose Tube, Gel-Filled, Double-Jacket Cable, 60 F, 62.5 µm multimode (OM1) |

CORNING

ALTOS® Loose Tube, Gel-Filled, Double-Jacket Cable

60 F, 62.5 µm multimode (OM1)

The Corning logo consists of a solid blue square with the word "CORNING" in white, uppercase, sans-serif font centered within it.

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

The Corning logo consists of the word "CORNING" in a large, bold, sans-serif font.