

# SOLO® ADSS Medium-Span, Loose Tube, Gel-Filled Cable

96 F, 62.5 µm multimode (OM1)

CORNING

Corning SOLO® ADSS medium-span cables are all-dielectric, self-supporting (ADSS) cables designed for easy and economical one-step installation in campus backbones with self-supporting installations where metallic messengers cannot be used. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The economical single-jacket design can span distances of 800 ft in NESC light conditions, 650 ft in NESC medium conditions and 450 ft in NESC heavy conditions.

This cable incorporates innovative waterblocking materials, eliminating the need for traditional flooding compound and providing efficient and craft-friendly cable preparation. While the concentric, self-supporting cable design allows easy, one-step installation using standard hardware and installation methods, the SZ-stranded, loose tube design isolates optical fibers from installation and environmental rigors and facilitates mid-span access. The ADSS optical cables are also available with a proprietary track-resistant polyethylene (TRPE) jacket suitable for installation in electric field potentials up to 25 kV.

## Features and Benefits

### Loose tube design

Stable performance and compatibility with all common fiber types

### Self-supporting

Easy, one-step installation

### Track-resistant jacket available

Suitable for installations up to 25 kV electric field potential

### Innovative waterblocking cable core



Provides efficient and craft-friendly cable preparation

## Standards

**Approvals and Listings** RDUP 7 CFR 1755.900 (formerly RUS)

**Common Installations** Outdoor self-supporting aerial

**Design and Test Criteria** ANSI/ICEA S-87-640

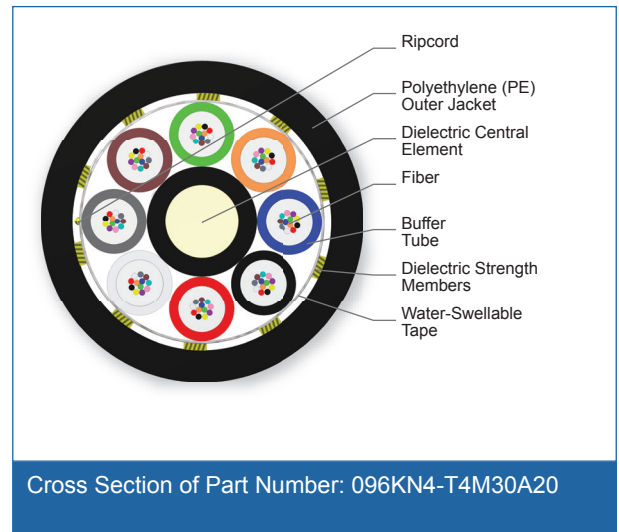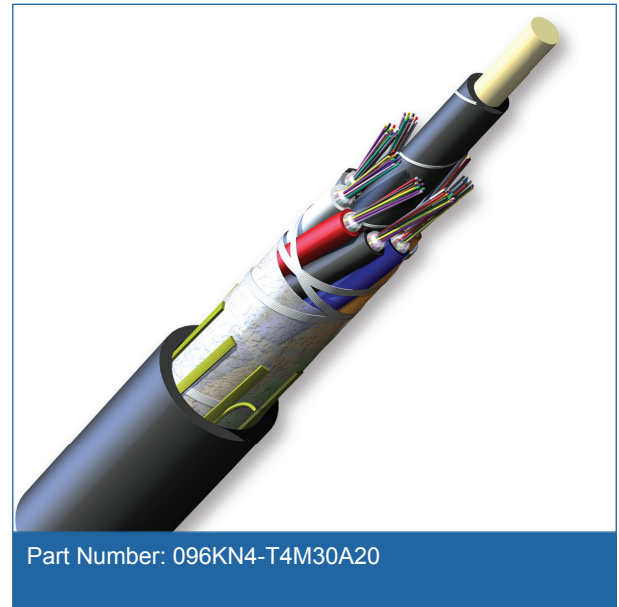

# SOLO® ADSS Medium-Span, Loose Tube, Gel-Filled Cable

96 F, 62.5 µm multimode (OM1)

CORNING

## Specifications

General Specifications	
Environment	Outdoor
Application	Self-Supporting
Cable Type	Loose Tube
Product Type	Self-Supporting
Fiber Category	62.5 µm MM (OM1)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	96
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	8
Number of Active Tubes	8
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate, White, Red, Black
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellaable
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Number of Ripcords	2
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Mechanical Characteristics Cable	
Weight	130 kg/km (87 lb/1000 ft)
Nominal Outer Diameter	13.1 mm (0.52 in)
Min. Bend Radius Installation	197 mm (7.8 in)
Min. Bend Radius Operation	131 mm (5.2 in)

# SOLO® ADSS Medium-Span, Loose Tube, Gel-Filled Cable

96 F, 62.5 µm multimode (OM1)

CORNING

## Installation Conditions

Span m (ft)	Initial Installation		NESC Light		NESC Medium		NESC Heavy	
	SAG %	Tension N (lbf)	SAG %	Tension N (lbf)	SAG %	Tension N (lbf)	SAG %	Tension N (lbf)
107 (350)	1.0	1715 (385)	0.6	3027 (680)	2.4	3891 (875)	3.4	5476 (1231)
122 (400)	1.0	1960 (441)	0.7	3379 (760)	2.5	4322 (972)	3.6	6055 (1361)
137 (450)	1.0	2205 (496)	0.7	3724 (837)	2.5	4741 (1066)	3.7	6616 (1487)
152 (500)	1.0	2450 (551)	0.7	4063 (916)	2.6	5151 (1158)	3.8	7161 (1610)
168 (550)	1.0	2695 (606)	0.7	4395 (988)	2.6	5551 (1248)	-	
183 (600)	1.0	2939 (661)	0.7	4723 (1062)	2.7	5945 (1336)	-	
198 (650)	1.0	3184 (716)	0.7	5046 (1134)	2.7	6331 (1423)	-	
213 (700)	1.0	3429 (771)	0.7	5365 (1206)	2.8	6712 (1509)	-	
229 (750)	1.0	3674 (826)	0.7	5680 (1277)	-		-	
244 (800)	1.0	3919 (881)	0.7	5993 (1347)	-		-	

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

- Notes: 1) Improved attenuation and bandwidth options available.  
 2) Bend-insensitive single-mode fibers available on request.  
 3) Contact a Corning Customer Care Representative for additional information.

# SOLO® ADSS Medium-Span, Loose Tube, Gel-Filled Cable

96 F, 62.5 µm multimode (OM1)



## Ordering Information

Part Number	096KN4-T4M30A20
Product Description	SOLO® ADSS Medium-Span, Loose Tube, Gel-Filled Cable, 96 F, 62.5 µm multimode (OM1)
EAN Code	4056418163574



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.