


LSZH™ Ribbon Cable

96 F, 50 μm multimode, extended 10G distance (OM4+)

CORNING

Corning LSZH™ ribbon cables are designed for horizontal intrabuilding backbones where limited-smoke and zero-halogen requirements exist. These cables are organized with 12-fiber ribbons inside a central tube that are surrounded by dielectric strength members and a specially formulated flame-retardant outer jacket. The 12-fiber ribbons have readily identifiable ribbon ID numbers and fiber colors that allow for easy access to individual fibers. The precise fiber and ribbon geometries result in excellent mass splicing yields. The ribbon riser cables are compatible with standard ribbon cable procedures and hardware.

This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

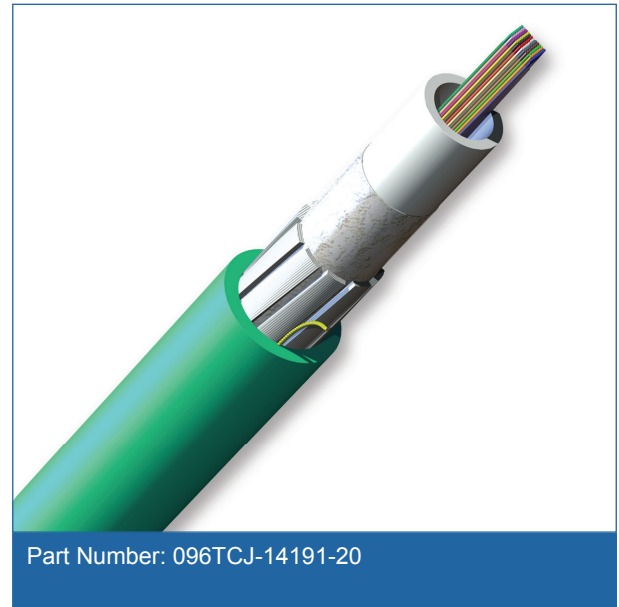

Features and Benefits

Precise fiber and ribbon geometries

Excellent mass splicing yields

Ribbon ID numbers and fiber colors


Easily identifiable

Available with interlocking armor

Additional mechanical durability

Common installations

Indoor vertical riser and general purpose horizontal according to National Electrical Code® (NEC®) Article 770

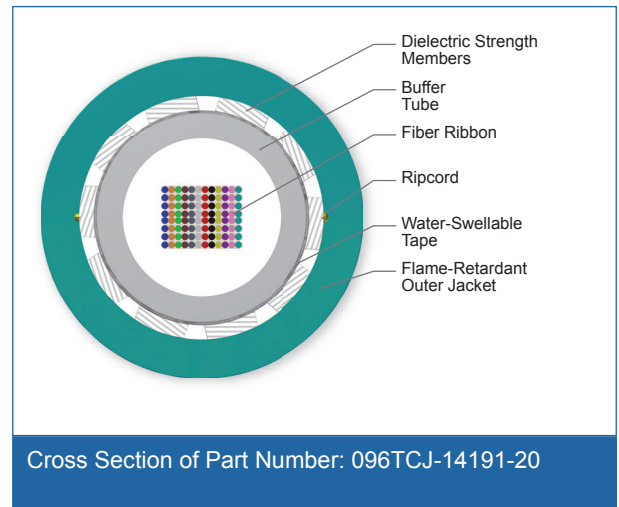

Standards

Listings

National Electrical Code® (NEC®) OFN-LS, IEEE 383 flame test, UL-1685

Design Criteria

CSA FT-4-ST1

Test Criteria

ANSI/ICEA S-83-596

LSZH™ Ribbon Cable

96 F, 50 µm multimode, extended 10G distance (OM4+)

CORNING

Specifications

| General Specifications | |
|------------------------|--|
| Environment | Indoor |
| Application | General Purpose Horizontal, Vertical Riser |
| Cable Type | Ribbon |
| Product Type | Distribution |
| Flame Rating | LSZH™ (OFNR-LS) |
| Fiber Category | 50 µm MM (OM4+) |

| Temperature Range | |
|-------------------|------------------------------------|
| Storage | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | -30 °C to 60 °C (-22 °F to 140 °F) |
| Operation | -40 °C to 70 °C (-40 °F to 158 °F) |

| Cable Design | |
|---|--|
| Fiber Count | 96 |
| Ribbons per Tube | 8 |
| Fibers per Ribbon | 12 |
| Fiber Coloring | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Buffer Tube Color | Natural |
| Buffer Tube Diameter | 8.1 mm (0.32 in) |
| Tape | Water-swellable |
| Tensile Strength Elements and/or Armoring - Layer 1 | Dielectric strength members |
| Number of Ripcords | 2 |
| Outer Jacket Material | Flame-retardant |
| Outer Jacket Color | Aqua |

| Mechanical Characteristics Cable | |
|-----------------------------------|-------------------------------|
| Max. Tensile Strength, Short-Term | 1320 N (300 lbf) |
| Max. Tensile Strength, Long-Term | 400 N (90 lbf) |
| Weight | 147.4 kg/km (98.9 lb/1000 ft) |
| Nominal Outer Diameter | 12.4 mm (0.49 in) |
| Min. Bend Radius Installation | 186 mm (7.3 in) |
| Min. Bend Radius Operation | 124 mm (4.9 in) |

LSZH™ Ribbon Cable

96 F, 50 µm multimode, extended 10G distance (OM4+)

CORNING

Chemical Characteristics

| | |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|---|

Fiber Specifications

Optical Characteristics (cabled)

| | |
|---|--------------------------|
| Fiber Core Diameter | 50 µm |
| Fiber Category | OM4 Extended Distance |
| Fiber Code | T |
| Performance Option Code | 91 |
| Wavelengths | 850 nm / 1300 nm |
| Maximum Attenuation | 3.0 dB/km / 1.0 dB/km |
| Serial 1 Gigabit Ethernet | 1100 m / 600 m |
| Serial 10 Gigabit Ethernet | 600 m / - |
| Min. Overfilled Launch (OFL) Bandwidth | 3500 MHz*km / 500 MHz*km |
| Minimum Effective Modal Bandwidth (EMB) | 5350 MHz*km / - |

* Assumes 0.7 dB maximum total connector/splice loss.

* Meets 0.75 ns optical skew when used in all Corning Plug and Play™/EDGE™ systems solutions.

- Notes:
- 1) 50 µm multimode fiber macrobend loss ≤ 0.2 dB at 850 nm for two turns around 7.5 mm radius mandrel.
 - 2) Improved attenuation and bandwidth options available.
 - 3) Bend-insensitive single-mode fibers available on request.
 - 4) Contact a Corning Customer Care Representative for additional information.

Ordering Information

| | |
|---------------------|--|
| Part Number | 096TCJ-14191-20 |
| Product Description | LSZH™ Ribbon Cable, 96 F, 50 µm multimode, extended 10G distance (OM4) |



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING