

# ALTOS® Loose Tube, Gel-Filled Cable

144 F, Single-mode (OS2)

CORNING

Corning ALTOS® all-dielectric cables are lightweight cables designed for duct and aerial (lashed) installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

## Features and Benefits

### Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

### SZ-stranded, loose tube design

Isolates fibers from installation and environmental rigors and facilitates mid-span access

### Dielectric central strength member

No preferential bend and requires no bonding or grounding



### Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

## Standards

**Approvals and Listings**    USDA Rural Development Programs

**Design and Test Criteria**    Telcordia GR-20, ICEA-640

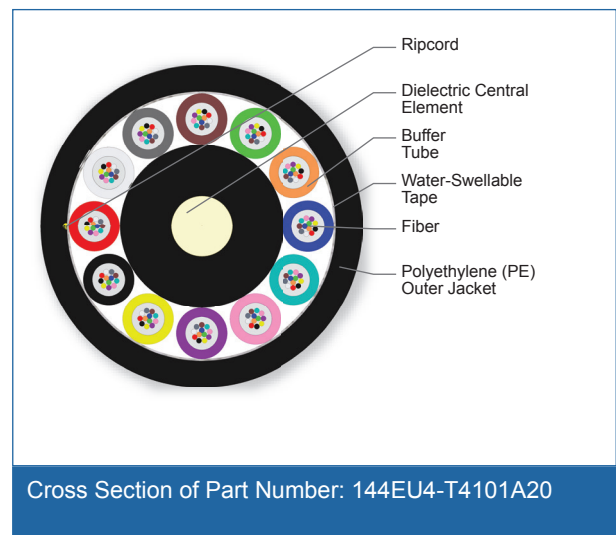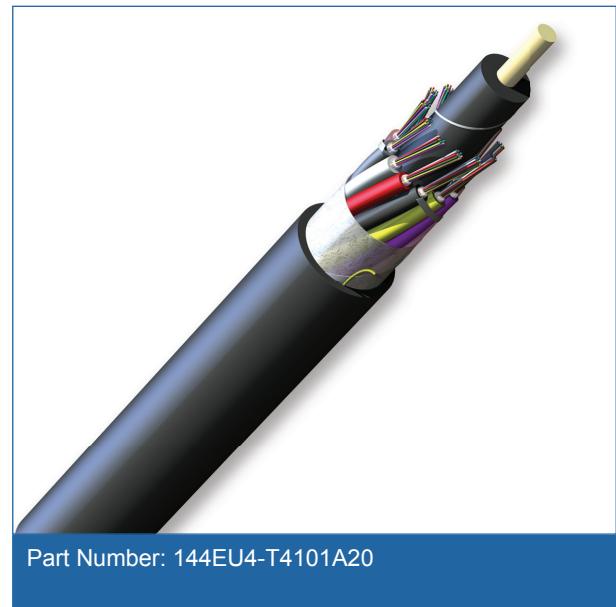

# ALTOS® Loose Tube, Gel-Filled Cable

144 F, Single-mode (OS2)

CORNING

## Specifications

### General Specifications

Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)

### Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

### Cable Design

Central Element	Dielectric
Fiber Count	144
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	12
Number of Active Tubes	12
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellable
Number of Ripcords	1
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

### Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	177 kg/km (119 lb/1000 ft)
Nominal Outer Diameter	15.8 mm (0.62 in)

# ALTOS® Loose Tube, Gel-Filled Cable

144 F, Single-mode (OS2)

CORNING

## Mechanical Characteristics Cable

Min. Bend Radius Installation	237 mm (9.3 in)
Min. Bend Radius Operation	158 mm (6.2 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

## Ordering Information

Part Number	144EU4-T4101A20
Product Description	ALTOS® Loose Tube, Gel-Filled Cable, 144 F, Single-mode (OS2)
EAN Code	4056418185798



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING