

ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

144 F, 62.5 µm multimode (OM1)

CORNING

Corning ALTOS® Lite™ double-jacket, double-armored cables are rugged cables designed for direct-buried installations. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

Features and Benefits

Two jacket layers and two steel tape armor layers

Provides superior rodent resistance for direct-buried applications

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Cable core features innovative waterblocking technology

Eliminates the need for traditional flooding compound and provides efficient and craft-friendly cable preparation

Medium-density polyethylene jacket

Makes cable rugged and durable while being flexible and easy to strip



Exceeds the RDUP requirements for mid-span buffer tube slack storage

Provides flexibility for mid-span access applications

Standards

Approvals and Listings USDA Rural Development Programs

Design and Test Criteria Telcordia GR-20, ICEA-640

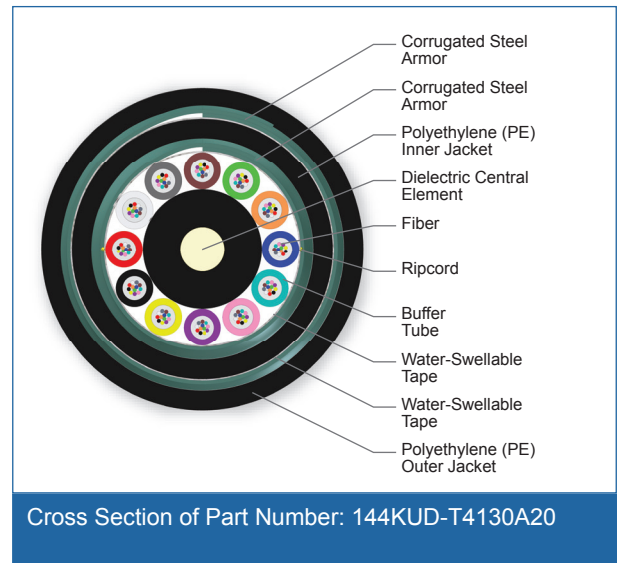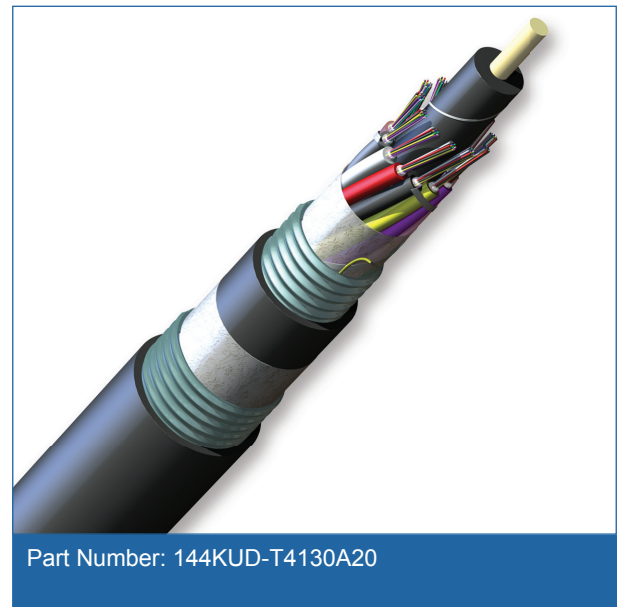

ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

144 F, 62.5 µm multimode (OM1)

CORNING

Specifications

| General Specifications | |
|------------------------|------------------|
| Environment | Outdoor |
| Application | Direct Buried |
| Cable Type | Loose Tube |
| Product Type | Armored |
| Fiber Category | 62.5 µm MM (OM1) |

| Temperature Range | |
|-------------------|------------------------------------|
| Storage | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | -30 °C to 70 °C (-22 °F to 158 °F) |
| Operation | -40 °C to 70 °C (-40 °F to 158 °F) |

| Cable Design | |
|---|--|
| Central Element | Dielectric |
| Fiber Count | 144 |
| Fiber Coloring | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Fibers per Tube | 12 |
| Number of Tube Positions | 12 |
| Number of Active Tubes | 12 |
| Buffer Tube Color Coding | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Buffer Tube Diameter | 2.5 mm (0.1 in) |
| Tape | Water-swellable |
| Tensile Strength Elements and/or Armoring - Layer 1 | Corrugated steel tape armor |
| Inner Jacket Material | Polyethylene (PE) |
| Tape, Layer 2 | Water-swellable |
| Number of Ripcords | 4 |
| Tensile Strength Elements and/or Armoring - Layer 2 | Corrugated steel tape armor |
| Outer Jacket Material | Polyethylene (PE) |
| Outer Jacket Color | Black |

ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

144 F, 62.5 µm multimode (OM1)

CORNING

Mechanical Characteristics Cable

| | |
|-----------------------------------|----------------------------|
| Max. Tensile Strength, Short-Term | 2700 N (600 lbf) |
| Max. Tensile Strength, Long-Term | 890 N (200 lbf) |
| Weight | 427 kg/km (286 lb/1000 ft) |
| Nominal Outer Diameter | 21.6 mm (0.85 in) |
| Min. Bend Radius Installation | 324 mm (12.8 in) |
| Min. Bend Radius Operation | 216 mm (8.5 in) |

Chemical Characteristics

| | |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|---|

Fiber Specifications

Optical Characteristics (cabled)

| | |
|---|-------------------------|
| Fiber Core Diameter | 62.5 µm |
| Fiber Category | OM1 |
| Fiber Code | K |
| Performance Option Code | 30 |
| Wavelengths | 850 nm / 1300 nm |
| Maximum Attenuation | 3.4 dB/km / 1.0 dB/km |
| Serial 1 Gigabit Ethernet | 300 m / 550 m |
| Serial 10 Gigabit Ethernet | 33 m / - |
| Min. Overfilled Launch (OFL) Bandwidth | 200 MHz*km / 500 MHz*km |
| Minimum Effective Modal Bandwidth (EMB) | 220 MHz*km / - |

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

Ordering Information

| | |
|---------------------|--|
| Part Number | 144KUD-T4130A20 |
| Product Description | ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable, 144 F, 62.5 µm multimode (OM1) |

CORNING

ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

144 F, 62.5 µm multimode (OM1)

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

The CORNING logo is displayed in a large, bold, black, sans-serif font.