

FREEDM® Ribbon, Gel-Filled Cable, Riser

144 F, Single-mode (OS2)

CORNING

Corning FREEDM® ribbon riser cables are lightweight cables designed for indoor/outdoor installations such as campus backbones in aerial, duct and riser applications. A UV-resistant, flame-retardant jacket allows added flexibility in placing this cable outdoors, whether it is an aerial, duct or direct-buried application, or indoor general horizontal or riser applications.

The cable consists of a ribbon stack of 12-fiber ribbons within a gel-filled central buffer tube. With easily accessible individual 250 µm colored fibers, the ribbons have readily identifiable ribbon ID numbers and fiber colors. The precise fiber and ribbon geometries result in excellent mass splicing yields. Surrounding the tube are dielectric strength members that provide tensile strength and innovative waterblocking tapes that reduce cable weight and preparation time. This design is also compatible with standard ribbon cable procedures and hardware for easy field installation and reduced labor costs.

Note: This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables while still providing all of the required environmental protection of an indoor/outdoor cable jacket. Black is the standard jacket color using the part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

Features and Benefits

Precise fiber and ribbon geometries

Excellent mass splicing yields

Waterblocked cable

Enables use of cables for outdoor applications

12-fiber ribbons with ribbon IDs

Easy identification

UV-resistant, flame-retardant jacket



Rugged, durable and easy to strip

Available in preconnectorized assemblies

Easy field installation and reduced labor costs

Common installations

Outdoor aerial and duct; indoor vertical riser and general purpose horizontal according to NEC Article 770

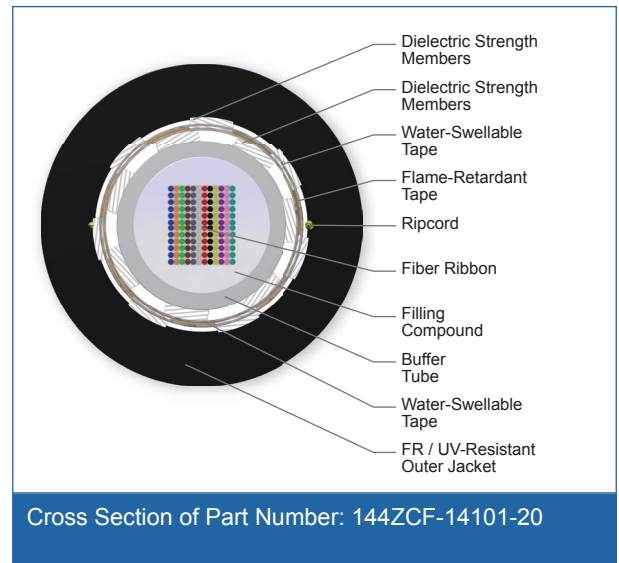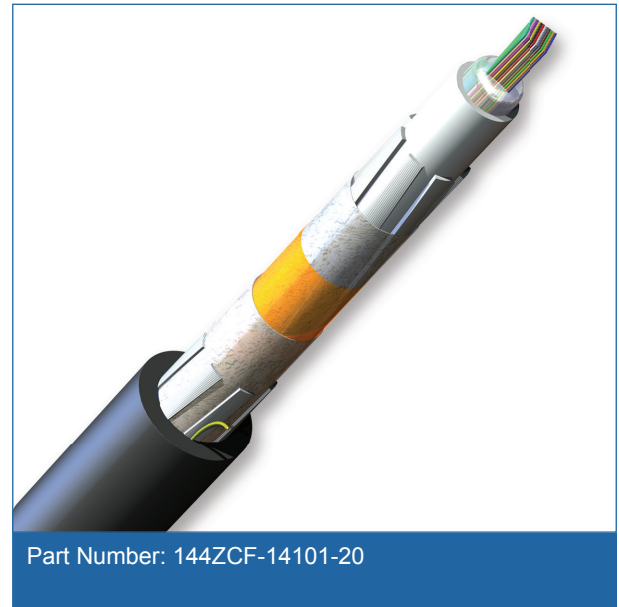

FREEDM[®] Ribbon, Gel-Filled Cable, Riser

144 F, Single-mode (OS2)

CORNING

Standards

| | |
|---------------------------------|---|
| Listings | National Electrical Code [®] (NEC [®]) OFNR, FT-4 |
| Design and Test Criteria | ANSI/ICEA S-104-696, CSA OFN FT-4 |

Specifications

| General Specifications | |
|------------------------|---|
| Environment | Indoor/Outdoor Cables |
| Application | Aerial, Direct Buried, Duct, General Purpose Horizontal, (Vertical Riser) |
| Cable Type | Ribbon |
| Product Type | Dielectric |
| Flame Rating | Riser (OFNR) |
| Fiber Category | Single-mode (OS2) |

| Temperature Range | |
|-------------------|------------------------------------|
| Storage | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | -10 °C to 60 °C (14 °F to 140 °F) |
| Operation | -40 °C to 70 °C (-40 °F to 158 °F) |

| Cable Design | |
|---|--|
| Fiber Count | 144 |
| Ribbons per Tube | 12 |
| Fibers per Ribbon | 12 |
| Fiber Coloring | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Buffer Tube Color | Natural |
| Buffer Tube Diameter | 7.8 mm (0.31 in) |
| Tensile Strength Elements and/or Armoring - Layer 1 | Dielectric strength members |
| Tape | Water-swellable |
| Tape, Layer 2 | Flame-retardant tape |
| Tape, Layer 3 | Water-swellable |
| Tensile Strength Elements and/or Armoring - Layer 2 | Dielectric strength members |
| Number of Ripcords | 2 |

FREEDM[®] Ribbon, Gel-Filled Cable, Riser

144 F, Single-mode (OS2)

CORNING

Cable Design

| | |
|-----------------------|-------------------------------|
| Outer Jacket Material | Flame-Retardant, UV-Resistant |
| Outer Jacket Color | Black |

Mechanical Characteristics Cable

| | |
|-----------------------------------|----------------------------|
| Max. Tensile Strength, Short-Term | 2700 N (600 lbf) |
| Max. Tensile Strength, Long-Term | 600 N (135 lbf) |
| Weight | 175 kg/km (118 lb/1000 ft) |
| Nominal Outer Diameter | 13.6 mm (0.54 in) |
| Min. Bend Radius Installation | 204 mm (8.0 in) |
| Min. Bend Radius Operation | 136 mm (5.4 in) |

Chemical Characteristics

| | |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2002/95/EG |
|------|---|

Fiber Specifications

Optical Characteristics (cabled)

| | |
|-------------------------|-----------------------------------|
| Fiber Name | Single-mode (OS2) |
| Fiber Category | G.652.D/G.657.A1 |
| Fiber Code | H |
| Performance Option Code | 01 |
| Wavelengths | 1310 nm / 1383 nm / 1550 nm |
| Maximum Attenuation | 0.4 dB/km / 0.4 dB/km / 0.3 dB/km |

Ordering Information

| | |
|---------------------|---|
| Part Number | 144ZCF-14101-20 |
| Product Description | FREEDM [®] Ribbon, Gel-Filled Cable, Riser, 144 F, Single-mode (OS2) |

FREEDM® Ribbon, Gel-Filled Cable, Riser

144 F, Single-mode (OS2)

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2015 Corning Optical Communications. All rights reserved.

Corning Optical Communications RF LLC (Corning Gilbert) • 5310 W. Camelback Rd. • Glendale, AZ 85301 USA

800-528-5567 • FAX: 602-344-6358 • International: +1-623-245-1050 • www.corning.com/gilbert

Page 4 | Revision date 2015-11-17

A complete listing of the trademarks of Corning Optical Communications RF is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications RF is ISO 9001

The CORNING logo is displayed in large, white, uppercase letters on a dark background.