

# ALTOS® Gel-Free, Triple-Jacket, Double-Armored Cables, 12-216 Fibers, Enhanced

192 F, Single-mode (OS2)

CORNING

Corning ALTOS® gel-free triple-jacket, double-armored cables are rugged, armored cables designed for direct-buried installations. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

## Features and Benefits

### Three jacket layers and two steel tape armor layers

Provide superior rodent resistance for direct-buried applications

### Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

### Gel-free waterblocking technology

Craft friendly cable preparation

### Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)


### Exceeds the RDUP requirements for mid-span buffer tube slack storage

Provides flexibility for mid-span access applications

## Standards

**Approvals and Listings**    USDA Rural Development Programs

**Design and Test Criteria**    ANSI/ICEA S-87-640

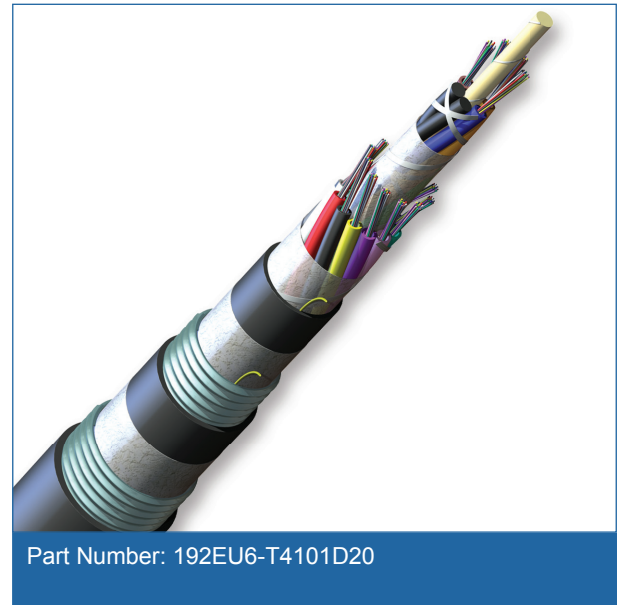

# ALTOS® Gel-Free, Triple-Jacket, Double-Armored Cables, 12-216 Fibers, Enhanced

192 F, Single-mode (OS2)

CORNING

## Specifications

General Specifications	
Environment	Outdoor
Application	Direct Buried
Cable Type	Loose Tube
Product Type	Armored
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	192
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	18
Number of Active Tubes	16
Buffer Tube Color Coding, Layer 1	Blue, Orange, Green, Brown
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellable
Number of Filling Elements	2
Buffer Tube Color Coding, Layer 2	Slate, White, Red, Black, Yellow, Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*
Tape, Layer 2	Water-swellable
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 3	Water-swellable
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Intermediate Jacket Material	Polyethylene (PE)
Tape, Layer 4	Water-swellable
Number of Ripcords	5
Tensile Strength Elements and/or Armoring - Layer 2	Corrugated steel tape armor

Notes: Tubes 13 to 24 include a co-extruded stripe that is white for the black tube and black for all other tube colors.

CORNING

# ALTOS® Gel-Free, Triple-Jacket, Double-Armored Cables, 12-216 Fibers, Enhanced

192 F, Single-mode (OS2)

CORNING

## Cable Design

Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

Notes: Tubes 13 to 24 include a co-extruded stripe that is white for the black tube and black for all other tube colors.

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	473 kg/km (317 lb/1000 ft)
Nominal Outer Diameter	24 mm (0.94 in)
Min. Bend Radius Installation	360 mm (14.2 in)
Min. Bend Radius Operation	240 mm (9.4 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

## Ordering Information

Part Number	192EU6-T4101D20
Product Description	ALTOS® Loose Tube, Gel-Free, Triple-Jacket, Double-Armored Cable, 192 F, Single-mode (OS2)
EAN Code	4056418167077

CORNING

# ALTOS® Gel-Free, Triple-Jacket, Double-Armored Cables, 12-216 Fibers, Enhanced

192 F, Single-mode (OS2)

The logo consists of the word "CORNING" in white, uppercase, sans-serif font, centered within a solid blue square.

## Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

The logo consists of the word "CORNING" in a large, black, uppercase, sans-serif font.