

# ALTOS® Figure-8 Loose Tube, Gel-Filled, Armored Cable

192 F, Single-mode (OS2)

CORNING

Corning ALTOS® figure-8 gel-filled cables are self-supporting aerial cables designed for easy and economical one-step installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. While the flexible, craft-friendly buffer tubes are easy to route in closures, the SZ-stranded, loose tube design isolates optical fibers from installation and environmental rigors and facilitates midspan access. The figure-8 cable design allows easy, one-step installation, using standard hardware and installation methods. These cables have a medium density polyethylene jacket that is rugged, durable and easy to strip.

## Features and Benefits

### Figure-8 cable design

Easy, one-step installation

### Innovative waterblocking design

Provides efficient and craft-friendly cable preparation

### Medium-density polyethylene jacket


Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

## Standards


<b>Approvals and Listings</b>	RDUP 7 CFR 1755.900 (formerly RUS)
-------------------------------	---------------------------------------

<b>Common Installations</b>	Outdoor self-supporting aerial
-----------------------------	-----------------------------------

<b>Design and Test Criteria</b>	ANSI/ICEA S-87-640
---------------------------------	--------------------

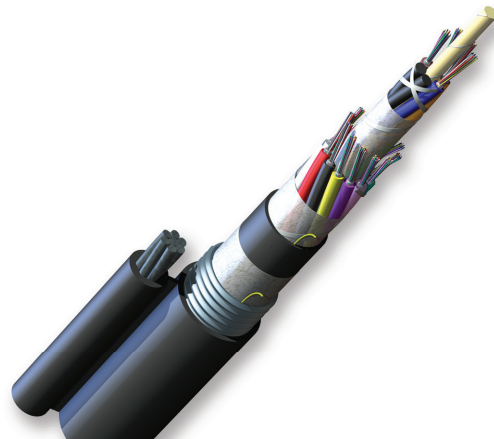

Part Number: 192EUB-T4101A20

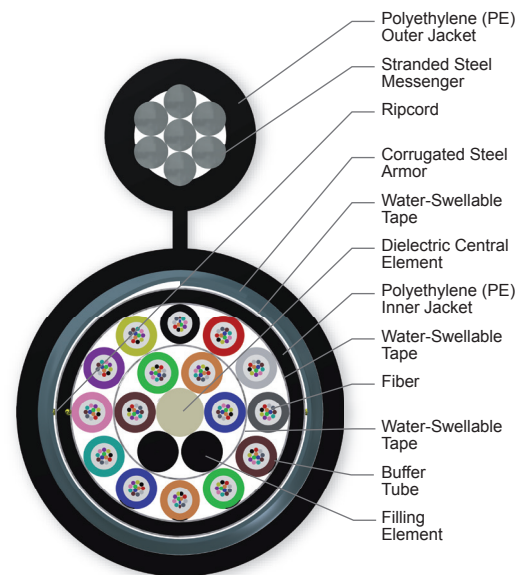

Cross Section of Part Number: 192EUB-T4101A20

# ALTOS® Figure-8 Loose Tube, Gel-Filled, Armored Cable

192 F, Single-mode (OS2)

CORNING

## Specifications

### General Specifications

Environment	Outdoor
Application	Aerial, Self-Supporting
Cable Type	Loose Tube
Product Type	Self-Supporting
Fiber Category	Single-mode (OS2)

### Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

### Cable Design

Central Element	Dielectric
Fiber Count	192
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	18
Number of Active Tubes	16
Buffer Tube Color Coding, Layer 1	Blue, Orange, Green, Brown
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	2
Tape	Water-swellaable
Buffer Tube Color Coding, Layer 2	Slate, White, Red, Black, Yellow, Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*
Tape, Layer 2	Water-swellaable
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 3	Water-swellaable
Number of Ripcords	3
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Messenger	Stranded steel

CORNING

# ALTOS® Figure-8 Loose Tube, Gel-Filled, Armored Cable

192 F, Single-mode (OS2)

CORNING

## Mechanical Characteristics Cable

Weight	535 kg/km (359 lb/1000 ft)
Nominal Outer Diameter	19.9 mm (0.78 in)
Nominal Cable Height	31.5 mm (1.24 in)
Min. Bend Radius Installation	299 mm (11.8 in)
Min. Bend Radius Operation	199 mm (7.8 in)

## Maximum Span with One-Percent Installation Sag

Maximum Span with 1% Installation Sag, NESC Light	162 m (530 ft)
Maximum Span with 1% Installation Sag, NESC Medium	158 m (520 ft)
Maximum Span with 1% Installation Sag, NESC Heavy	116 m (380 ft)

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km

## Ordering Information

Part Number	192EUB-T4101A20
Product Description	ALTOS® Figure-8 Loose Tube, Gel-Filled, Armored Cable, 192 F, Single-mode (OS2)
EAN Code	4056418167053



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING