

# ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

144 F, 62.5 µm multimode (OM1)

CORNING

Corning ALTOS® Lite™ double-jacket, double-armored cables are rugged cables designed for direct-buried installations. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

## Features and Benefits

### Two jacket layers and two steel tape armor layers

Provides superior rodent resistance for direct-buried applications

### Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

### Cable core features innovative waterblocking technology

Eliminates the need for traditional flooding compound and provides efficient and craft-friendly cable preparation

### Medium-density polyethylene jacket

Makes cable rugged and durable while being flexible and easy to strip


### Exceeds the RDUP requirements for mid-span buffer tube slack storage

Provides flexibility for mid-span access applications


## Standards

<b>Approvals and Listings</b>	USDA Rural Development Programs
-------------------------------	---------------------------------

<b>Design and Test Criteria</b>	Telcordia GR-20, ICEA-640
---------------------------------	---------------------------

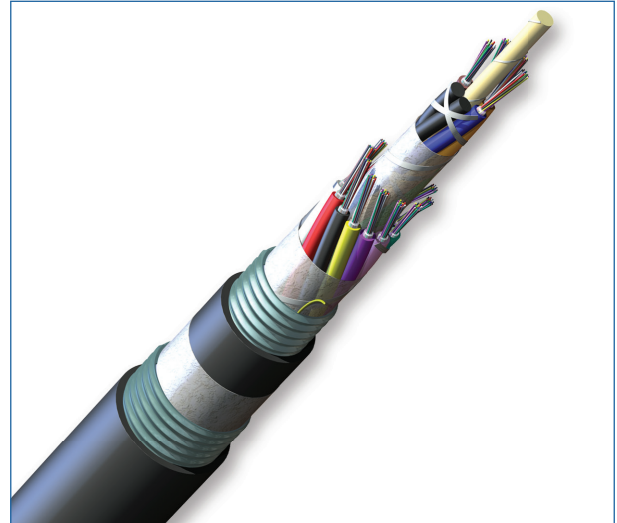

Part Number: 192KUD-T4130A20

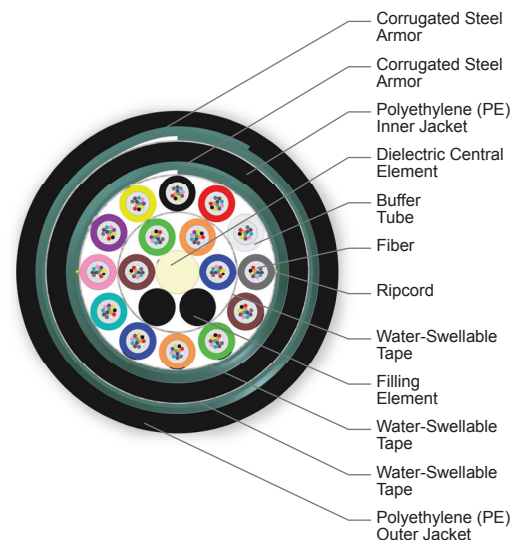

Cross Section of Part Number: 192KUD-T4130A20

# ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

144 F, 62.5 µm multimode (OM1)

CORNING

## Specifications

### General Specifications

Environment	Outdoor
Application	Direct Buried
Cable Type	Loose Tube
Product Type	Armored
Fiber Category	62.5 µm MM (OM1)

### Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

### Cable Design

Central Element	Dielectric
Fiber Count	192
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	18
Number of Active Tubes	16
Buffer Tube Color Coding, Layer 1	Blue, Orange, Green, Brown
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellaable
Buffer Tube Color Coding, Layer 2	Slate, White, Red, Black, Yellow, Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*
Number of Filling Elements	2
Tape, Layer 2	Water-swellaable
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 3	Water-swellaable
Number of Ripcords	4
Tensile Strength Elements and/or Armoring - Layer 2	Corrugated steel tape armor
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Notes: Tubes 13 to 24 include a co-extruded stripe that is white for the black tube and black for all other tube colors.

CORNING

# ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable

144 F, 62.5 µm multimode (OM1)

CORNING

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	420 kg/km (282 lb/1000 ft)
Nominal Outer Diameter	21.8 mm (0.86 in)
Min. Bend Radius Installation	327 mm (12.9 in)
Min. Bend Radius Operation	218 mm (8.6 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	192KUD-T4130A20
Product Description	ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable, 192 F, 62.5 µm multimode (OM1)

CORNING

# **ALTOS® Lite™ Loose Tube, Gel-Filled, Double-Jacket, Double-Armored Cable**

144 F, 62.5 µm multimode (OM1)

CORNING

## *Notes*



**Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA**

**800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)**

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING