


Ribbon Interlocking Armored Cable, Riser

216 F, Single-mode (OS2)

CORNING

Corning ribbon interlocking armored riser cables are designed for use in riser and general-purpose environments in intrabuilding backbone and horizontal installations. These cables are standard ribbon riser cables placed inside spirally wrapped aluminum interlocking armor for ruggedness and superior crush resistance. This special construction facilitates routing inside buildings, through riser shafts, to telecommunication rooms and to workstations. Ideal for heavy traffic or more challenging mechanical exposure conditions, this cable design consists of fibers organized into 12-fiber ribbons inside a central tube surrounded by dielectric strength members to provide tensile strength. The flexible interlocking armor up to seven times the crush protection of nonarmored cables, while a specially formulated flame-retardant outer jacket allows the design to meet the requirements of the NFPA 262 flame test. The 12-fiber ribbons have readily identifiable ribbon ID numbers and fiber colors with easy access to individual fibers.

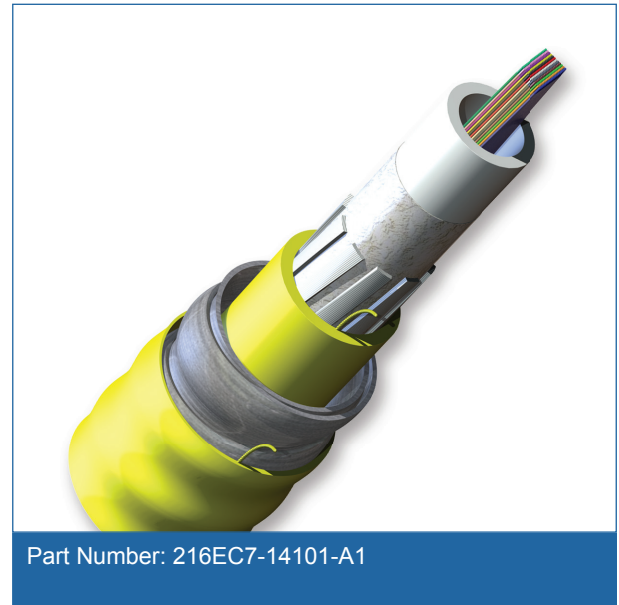

Features and Benefits

Ribbon ID numbers and fiber colors

Easily identifiable

Precise fiber and ribbon geometries

Excellent mass splicing yields

Flame-retardant jacket


Rugged and durable

Flexible interlocking armor

Up to seven times the crush protection compared to non-armored cables

Common installations

Indoor vertical riser and general purpose horizontal according to National Electrical Code® (NEC®) Article 770

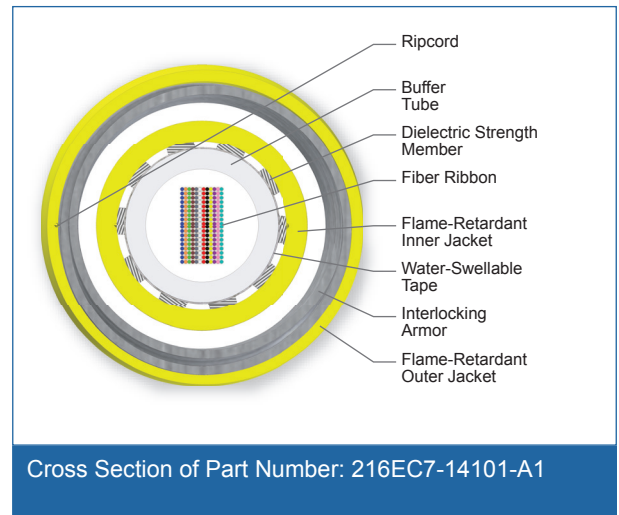

Standards

| | |
|------------------------|---------------------------------------|
| Listings | National Electrical Code® (NEC®) OFNR |
| Design Criteria | CSA FT-6 |
| Test Criteria | ANSI/ICEA S-83-596 |

CORNING

Ribbon Interlocking Armored Cable, Riser

216 F, Single-mode (OS2)

CORNING

Specifications

| General Specifications | |
|------------------------|--|
| Environment | Indoor |
| Application | General Purpose Horizontal, Vertical Riser |
| Cable Type | Ribbon |
| Flame Rating | Riser (OFCR) |
| Fiber Category | Single-mode (OS2) |

| Temperature Range | |
|-------------------|------------------------------------|
| Storage | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | -10 °C to 60 °C (14 °F to 140 °F) |
| Operation | -20 °C to 70 °C (-4 °F to 158 °F) |

| Cable Design | |
|---|--|
| Fiber Count | 216 |
| Ribbons per Tube | 18 |
| Fibers per Ribbon | 12 |
| Fiber Coloring | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Buffer Tube Color | Natural |
| Buffer Tube Diameter | 11 mm (0.43 in) |
| Tape, Layer 1 | Water-swellable |
| Tensile Strength Elements and/or Armoring - Layer 1 | Dielectric strength members |
| Number of Ripcords | 2 |
| Inner Jacket Material | Flame-retardant |
| Tensile Strength Elements and/or Armoring - Layer 3 | Interlocking armor |
| Outer Jacket Material | Flame-retardant |
| Outer Jacket Color | Yellow |

| Mechanical Characteristics Cable | |
|-----------------------------------|--------------------|
| Max. Tensile Strength, Short-Term | 1320 N (300 lbf) |
| Max. Tensile Strength, Long-Term | 400 N (90 lbf) |
| Nominal Inner Cable Diameter | 15.50 mm (0.61 in) |
| Nominal Outer Diameter | 22.5 mm (0.89 in) |
| Min. Bend Radius Installation | 338 mm (13.31 in) |

Ribbon Interlocking Armored Cable, Riser

216 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

| | |
|----------------------------|----------------------------|
| Min. Bend Radius Operation | 225 mm (8.86 in) |
| Weight | 404 kg/km (271 lb/1000 ft) |

Chemical Characteristics

| | |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2002/95/EG |
|------|---|

Fiber Specifications

Optical Characteristics (cabled)

| | |
|-------------------------|-----------------------------------|
| Fiber Name | Single-mode (OS2) |
| Fiber Category | G.652.D |
| Fiber Code | E |
| Performance Option Code | 01 |
| Wavelengths | 1310 nm / 1383 nm / 1550 nm |
| Maximum Attenuation | 0.4 dB/km / 0.4 dB/km / 0.3 dB/km |

Ordering Information

| | |
|---------------------|--|
| Part Number | 216EC7-14101-A1 |
| Product Description | Ribbon Interlocking Armored Cable, Riser, 216 F, Single-mode (OS2) |
| EAN Code | 4056418148106 |

Shipping Information

| | |
|--------------------|-----|
| Units per Delivery | 1/1 |
|--------------------|-----|



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING