

# ALTOS® Loose Tube, Gel-Filled Cable

216 F, Single-mode (OS2)

CORNING

Corning ALTOS® all-dielectric cables are lightweight cables designed for duct and aerial (lashed) installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

## Features and Benefits

### Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

### SZ-stranded, loose tube design

Isolates fibers from installation and environmental rigors and facilitates mid-span access

### Dielectric central strength member

No preferential bend and requires no bonding or grounding



### Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

## Standards

**Approvals and Listings**    USDA Rural Development Programs

**Design and Test Criteria**    Telcordia GR-20, ICEA-640

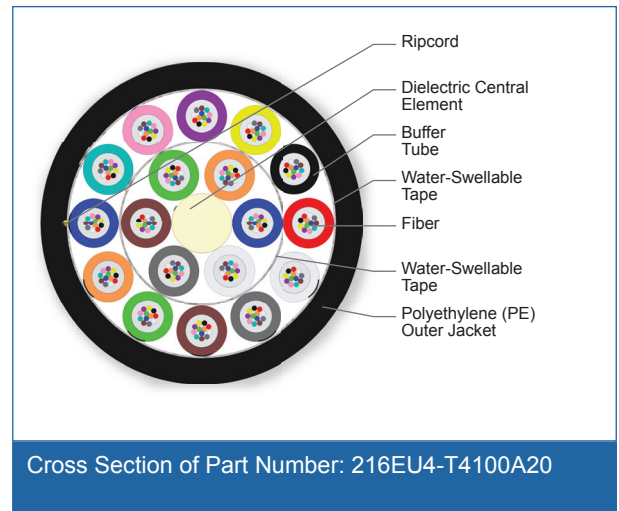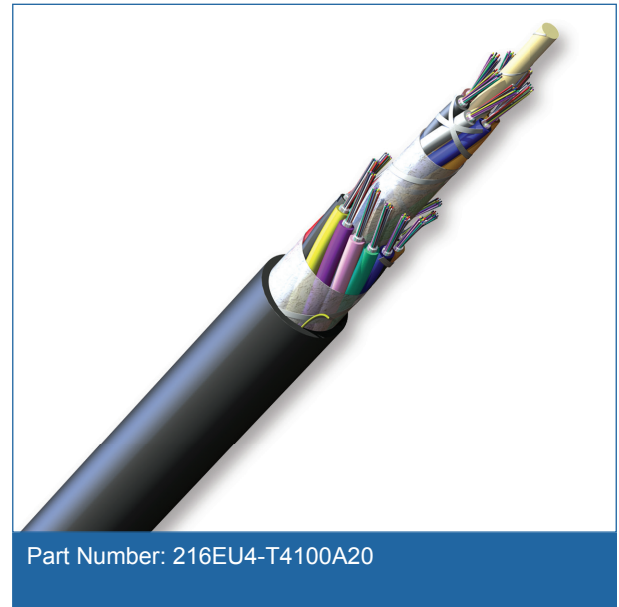

# ALTOS<sup>®</sup> Loose Tube, Gel-Filled Cable

216 F, Single-mode (OS2)

CORNING

## Specifications

General Specifications	
Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	216
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	18
Number of Active Tubes	18
Buffer Tube Color Coding, Layer 1	Blue, Orange, Green, Brown, Slate, White
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellaable
Buffer Tube Color Coding, Layer 2	Red, Black, Yellow, Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*, Slate*, White*
Tape, Layer 2	Water-swellaable
Number of Ripcords	1
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

Notes: Tubes 13 to 24 include a co-extruded stripe that is white for the black tube and black for all other tube colors.

# ALTOS® Loose Tube, Gel-Filled Cable

216 F, Single-mode (OS2)

CORNING

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	169 kg/km (113 lb/1000 ft)
Nominal Outer Diameter	16.0 mm (0.63 in)
Min. Bend Radius Installation	240 mm (9.4 in)
Min. Bend Radius Operation	160 mm (6.3 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	00
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.35 dB/km / 0.35 dB/km / 0.25 dB/km

## Ordering Information

Part Number	216EU4-T4100A20
Product Description	ALTOS® Loose Tube, Gel-Filled Cable, 216 F, Single-mode (OS2)
EAN Code	4056418186283



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING