

# SC APC to SC APC Patch cord, 1 fibre, tight-buffered cable, LSZH, 2.8 mm legs

single-mode (OS2), 1 m

CORNING

Patch cables are used for non-permanent connections between patch panels, transmission equipment, etc. Pre-assembled cables allow for the implementation of complete Plug & Play solutions. When such a solution is adopted with accurate dimensioning and appropriate cable routing, it is possible to install even large cabling systems rapidly.


## Features and Benefits

### Connectors

- SC connector according to TIA/EIA-604 -3
- All connectors are tested to FOTP -21.
- Connectors are pre-radius polished to provide the optimal end-face geometry for long-term performance.

### Cable

- Low smoke (IEC 61034) and zero-halogen (LSZH), flame retardant to IEC 60332-3-24 (C) and noncorrosive to IEC 60754-2 (FRNC)
- Cables are metal free; hence, there are no ground-loop or potential-equalization problems. Completely dry design (without gel)
- Colour of outer sheath: OM1, OM2 – orange; OM3, OM4 – turquoise; OS2 – yellow

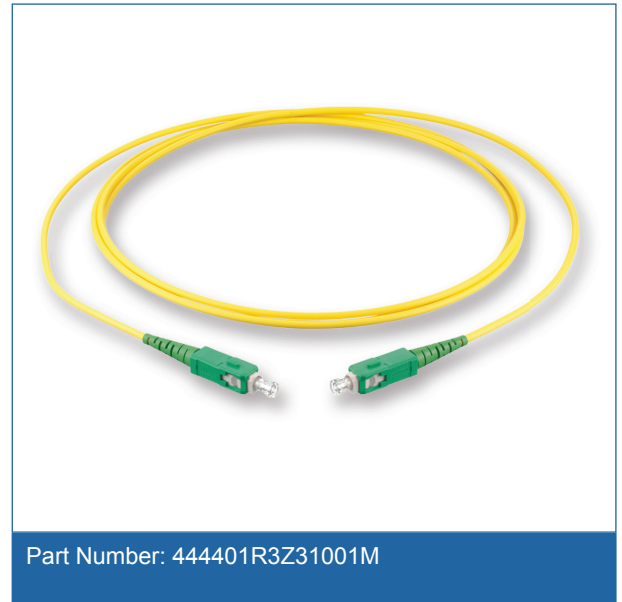

## Standards

Intermateability TIA/EIA-604-3 / TIA/EIA-604-3

## Specifications

| General Specifications |                   |
|------------------------|-------------------|
| Flame rating           | LSZH™/FRNC        |
| Cable assembly type    | Single Fibre      |
| Fibre Category         | Single-mode (OS2) |

| Temperature Range         |                 |
|---------------------------|-----------------|
| Operation                 | -10 °C to 60 °C |
| Installation and assembly | -5 °C to 50 °C  |
| Storage                   | -10 °C to 60 °C |

# SC APC to SC APC Patch cord, 1 fibre, tight-buffered cable, LSZH, 2.8 mm legs

single-mode (OS2), 1 m

CORNING

## Design - Connector A

|                  |            |
|------------------|------------|
| Connector type   | SC         |
| Ferrule Material | Ceramic    |
| Polish           | APC        |
| Housing material | Composite  |
| Housing Colour   | Green      |
| Boot type        | Individual |
| Boot colour      | Green      |
| Keyed (security) | No         |

## Mechanical Specifications - Connector A

|                                 |                                  |
|---------------------------------|----------------------------------|
| Durability                      | ≤ 0.2 dB 1000 rematings, FOTP-21 |
| Tensile strength jacketed cable | 44 N                             |

## Optical Specifications - Connector A

|                         |          |
|-------------------------|----------|
| Reflectance, typical    | ≤ -65 dB |
| Insertion loss, typical | 0.15 dB  |
| Insertion loss, max.    | 0.4 dB   |

## Design - Connector B

|                  |            |
|------------------|------------|
| Boot colour      | Green      |
| Connector type   | SC         |
| Ferrule Material | Ceramic    |
| Polish           | APC        |
| Housing material | Composite  |
| Housing Colour   | Green      |
| Boot type        | Individual |
| Keyed (security) | No         |

## Mechanical Specifications - Connector B

|                                 |                                  |
|---------------------------------|----------------------------------|
| Durability                      | ≤ 0.2 dB 1000 rematings, FOTP-21 |
| Tensile strength jacketed cable | 44 N                             |

# SC APC to SC APC Patch cord, 1 fibre, tight-buffered cable, LSZH, 2.8 mm legs

single-mode (OS2), 1 m

CORNING

## Optical Specifications - Connector B

|                         |          |
|-------------------------|----------|
| Reflectance, typical    | ≤ -65 dB |
| Insertion loss, typical | 0.15 dB  |
| Insertion loss, max.    | 0.4 dB   |

## Cable Design

|                               |              |
|-------------------------------|--------------|
| Fibre count                   | 1            |
| Outer diameter                | 2.8 mm       |
| Outer jacket colour           | Yellow       |
| Outer jacket material         | LSZH™/FRNC   |
| Minimum Bend Radius           | 30 mm        |
| Crush resistance (reversible) | 1000 N/10 cm |
| Tensile strength              | 200 N        |

## Chemical Characteristics

|      |   |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|---|

## Fibre Specifications

### Optical Characteristics (cabled)

|                            |                                      |
|----------------------------|--------------------------------------|
| Fibre name                 | E9/125 SMF28e+®                      |
| Fibre core diameter        | 9 µm                                 |
| Fibre Category             | OS2                                  |
| Fibre code                 | E                                    |
| Wavelengths                | 1310 nm / 1383 nm / 1550 nm          |
| Linear Attenuation         | 0.38 dB/km / 0.38 dB/km / 0.25 dB/km |
| Serial 1 gigabit ethernet  | 5000 m / - / -                       |
| Serial 10 gigabit ethernet | 10000 m / - / 40000 m                |
| Cable cutoff wavelength    | 1260 nm                              |

Notes: 1) Meets 0.75 ns optical skew when used in all Corning Plug and Play™/EDGE™ systems solutions.  
2) Improved attenuation and bandwidth options available  
3) Bend-insensitive single-mode fibres available on request.  
4) Contact a Corning Customer Care Representative for additional information

# SC APC to SC APC Patch cord, 1 fibre, tight-buffered cable, LSZH, 2.8 mm legs

single-mode (OS2), 1 m

CORNING

## Ordering Information

|                     |   |
|---------------------|---|
| Part Number         | 444401R3Z31001M   |
| Product Description | SC Angled to SC Angled patch cord on single-fibre cable, with an outer diameter of 2.8 mm and a low-smoke, zero-halogen sheath. Length is variable. |
| EAN Code            | 4042673621607   |
| Length              | 1 m   |
| Weight              | 0.02 kg   |

## Shipping Information

|                                |                          |
|--------------------------------|--------------------------|
| Packing type                   | Cardboard box            |
| Packing dimensions (L x W x H) | 380 mm x 250 mm x 180 mm |
| Units Per Delivery             | 1/1                      |



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY

00 800 2676 4641 · FAX: +49 30 5303 2335 · [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified.

© 2018 Corning Optical Communications. All rights reserved.