

FREEDM® UltraRibbon™ Gel-Filled Cable, Riser

576 fibres, single-mode (OS2)

CORNING

Corning FREEDM® UltraRibbon™ riser cables provide the ultimate solution for indoor/outdoor high-fibre-count applications. The smallest and lightest in the industry, these cables are designed to maximize the use of critical duct space with excellent installation results. The UV-resistant, flame-retardant jacket allows this cable to be installed outdoors or in indoor general purpose horizontal and riser applications. FREEDM UltraRibbon riser cables employ a single buffer tube containing a stack of 24- and 36-fibre ribbons that are easily separated by hand into two or three 12-fibre ribbons respectively. This cable is also available with interlocking armor for additional mechanical durability.

Features and Benefits

Precise fibre and ribbon geometries

Excellent mass splicing yields

Waterblocked cable

Enables use of indoor/outdoor cables

12-fibre ribbons with ribbon IDs

Easy identification

UV-resistant, flame-retardant jacket

Rugged, durable and easy to strip

Available in preconnectorized assemblies

Easy field installation and reduced labor costs

504-864 fibres in a compact design


Maximizes use of critical duct space

Common installations


Outdoor aerial and duct; indoor general purpose horizontal according to NEC Article 770

Standards

Listings	National Electrical Code® (NEC®) OFNR
Design Criteria	CSA OFN FT-4
Test Criteria	ANSI/ICEA S-104-696, Telcordia GR-409 and GR-20

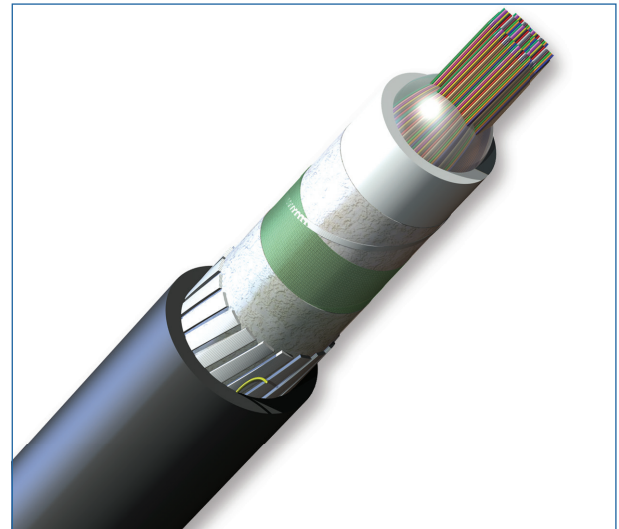

Part Number: 576ZVF-14101-20

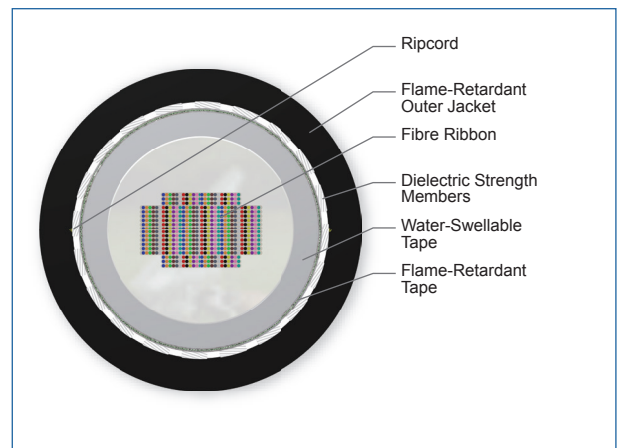

Cross Section of Order Number: 576ZVF-14101-20

FREEDM® UltraRibbon™ Gel-Filled Cable, Riser

576 fibres, single-mode (OS2)

CORNING

Specifications

General Specifications	
Environment	Indoor / Outdoor
Application	Aerial, Direct Buried, Duct, General Purpose Horizontal, (Vertical Riser)
Cable type	Ribbon
Product type	Dielectric
Flame rating	Riser (OFNR)
Fibre Category	single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation and assembly	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable design	
Fibre Count	576
Ribbons per tube	6 and 12
Fibres per Ribbon	24 and 36
Fibre colouring	Blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, turquoise
Buffer tube colour	Natural
Buffer tube diameter	17.9 mm (0.7 in)
Tensile Strength Elements and/or Armouring - Layer 1	Dielectric strength members
Tape	Water-swellaable
Tape, Layer 2	Flame-retardant tape
Tape, Layer 3	Water-swellaable
Number of ripcords	2
Outer jacket material	Flame-Retardant, UV-Resistant
Outer jacket colour	black

Mechanical Characteristics Cable	
Max. tensile strength, short-term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Nominal Outer Diameter	25.4 mm (1.0 in)

FREEDM® UltraRibbon™ Gel-Filled Cable, Riser

576 fibres, single-mode (OS2)



Mechanical Characteristics Cable

Min. Bend Radius Installation	381 mm (15 in)
Min. Bend Radius Operation	254 mm (10 in)
Weight	567 kg/km (381 lb/1000 ft)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Ordering Information

Part Number	576ZVF-14101-20
Product Description	FREEDM® UltraRibbon™ Gel-Filled Cable, Riser, 576 fibres, single-mode (OS2)
EAN Code	4056418141565



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.