

FREEDM® Loose Tube Gel-Free Cables

CORNING

Features and Benefits

Riser rating

No transition splices when entering buildings

Gel-free waterblocking technology

Craft-friendly cable preparation

Color-coded tubes and fibers

Quick and easy identification

All-dielectric cable construction


Requires no grounding or bonding

UV-resistant, flame-retardant jacket


Rugged, durable and easy to strip

Corning FREEDM® loose tube gel-free riser cables are flame-retardant, indoor/outdoor, riser-rated cables designed for interbuilding and intrabuilding backbones in aerial, duct and riser applications. These cables are protected against water penetration by innovative waterblocking materials that swell to absorb water. Waterblocking without the use of messy gels provides more efficient and craft-friendly cable preparation. It also makes cable access easier and simplifies the use of buffer tube fan-out kits.

The buffer tubes and fibers in each tube are color coded for quick, easy identification. The SZ-stranded, loose tube design isolates fibers from installation and environmental rigors and allows for easy mid-span access. The cable design is also National Electrical Code® (NEC®) listed (OFNR and FT-4). The all-dielectric cable construction requires no grounding or bonding, and the UV-resistant, flame-retardant jacket is rugged, durable and easy to strip.

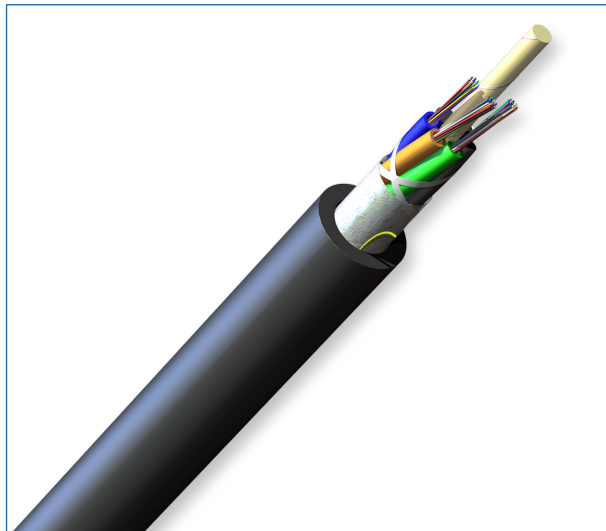

FREEDM Loose Tube Gel-Free Cables, 36 Fibers
| Photo PIM0791

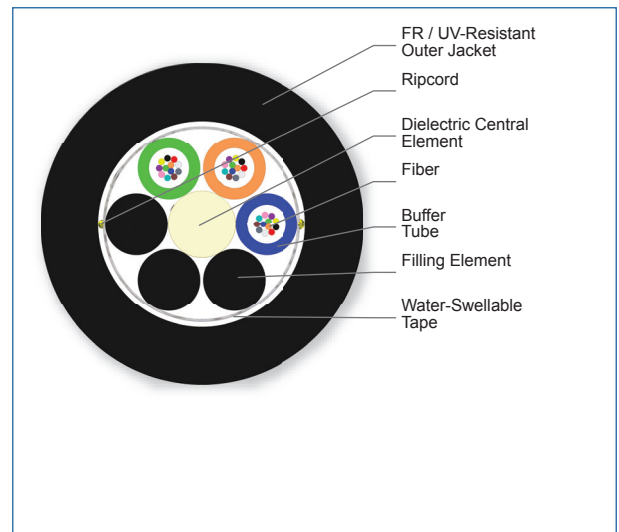

FREEDM Loose Tube Gel-Free Cables, 36 Fibers
| Photo PIM1691


CORNING

FREEDM® Loose Tube Gel-Free Cables




Standards

Approval and Listings	National Electrical Code® (NEC®) OFNR, CSA OFN FT-4
Common Installations	Outdoor lashed aerial and duct; indoor vertical riser and general purpose horizontal according to National Electrical Code (NEC) Article 770
Design and Test Criteria	ANSI/ICEA S-104-696

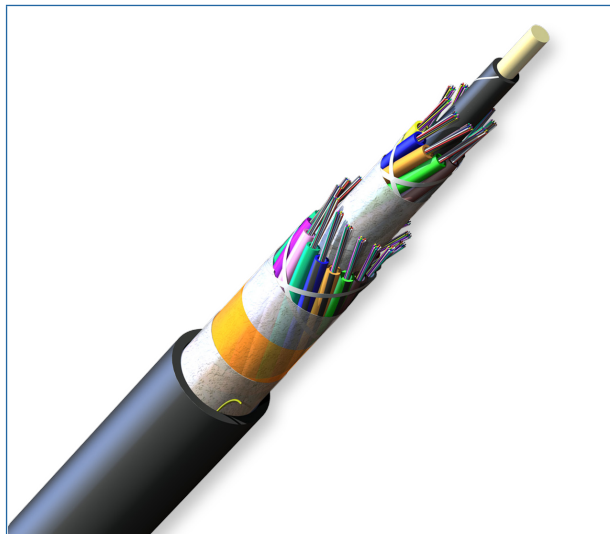

FREEDM Loose Tube Gel-Free Cables, 288 Fibers
| Photo PIM0799

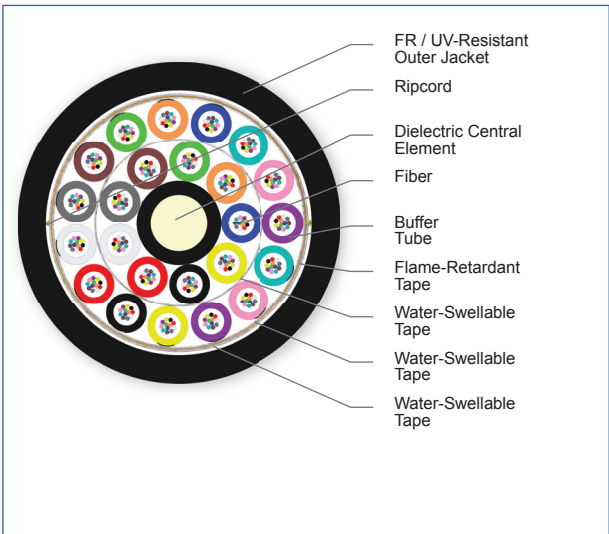

FREEDM Loose Tube Gel-Free Cables, 288 Fibers
| Photo PIM1699

Specifications

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

* Note: Corning recommends storing indoor/outdoor cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.

FREEDM® Loose Tube Gel-Free Cables

CORNING

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	810 N (180 lbf)

Mechanical Characteristics Cable

Fiber Count	Buffer Tube Diameter	Nominal Outer Diameter	Min. Bend Radius Installation	Min. Bend Radius Operation	Weight	Product Type
12 - 72	2.5 mm (0.1 in)	12.9 mm (0.51 in)	194 mm (7.6 in)	129 mm (5.1 in)	145 kg/km (98 lb/1000 ft)	Dielectric
96	2.5 mm (0.1 in)	13.8 mm (0.54 in)	207 mm (8.1 in)	138 mm (5.4 in)	161 kg/km (108 lb/1000 ft)	Dielectric
144	2.5 mm (0.1 in)	17.7 mm (0.7 in)	266 mm (10.5 in)	177 mm (7 in)	251 kg/km (168 lb/1000 ft)	Dielectric
192 - 216	2.5 mm (0.1 in)	17.6 mm (0.69 in)	264 mm (10.4 in)	176 mm (6.9 in)	224 kg/km (151 lb/1000 ft)	Dielectric
224 - 288	2.5 mm (0.1 in)	19.8 mm (0.78 in)	297 mm (11.7 in)	198 mm (7.8 in)	283 kg/km (190 lb/1000 ft)	Dielectric

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

CORNING

FREEDM® Loose Tube Gel-Free Cables

CORNING

Transmission Performance

Multimode					
Fiber Core Diameter (µm)	62.5	50	50	50	50
Fiber Category	OM1	OM2	OM3	OM4	OM4 Extended Distance
Fiber Code	K	T	T	T	T
Performance Option Code	30	31	80	90	91
Wavelengths (nm)	850/1300	850/1300	850/1300	850/1300	850/1300
Maximum Attenuation (dB/km)	3.4/1.0	3.0/1.0	3.0/1.0	3.0/1.0	3.0/1.0
Serial 1 Gigabit Ethernet (m)	300/550	750/500	1000/600	1100/600	1100/600
Serial 10 Gigabit Ethernet (m)	33/-	150/-	300/-	550/-	600/-
Min. Overfilled Launch (OFL) Bandwidth (MHz*km)	200/500	700/500	1500/500	3500/500	3500/500
Minimum Effective Modal Bandwidth (EMB) (MHz*km)	220/-	950/-	2000/-	4700/-	5350/-

* ITU-T G.652 D compliant.

* Meets 0.75 ns optical skew when used in all Corning Plug and Play™/Pretium EDGE® systems solutions.

* Assumes 1.0 dB maximum total connector/splice loss.

* Assumes 0.7 dB maximum total connector/splice loss.

- Notes:
- 1) Improved attenuation and bandwidth options available.
 - 2) Bend-insensitive single-mode fibers available on request.
 - 3) 50 µm multimode fiber macrobend loss ≤ 0.2 dB at 850 nm for two turns around 7.5 mm radius mandrel.
 - 4) Contact a Corning Customer Care Representative for additional information.


Single-mode	
Fiber Name	SMF-28e+® fiber
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths (nm)	1310/1383/1550
Maximum Attenuation (dB/km)	0.4/0.4/0.3
Typical Attenuation* (dB/km)	0.33/0.33/0.19

CORNING

FREEDM® Loose Tube Gel-Free Cables

CORNING

Ordering Information | Note: Contact Customer Care at 1-800-743-2675 for other options.

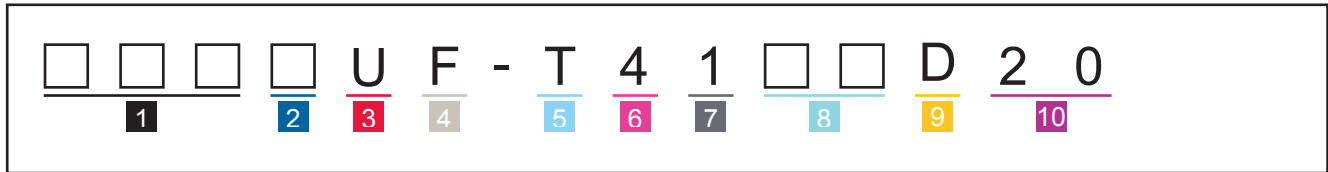

1 Select fiber count.

Standard offerings:
012-288
Increments of 12

2 Select fiber code.

K = 62.5 μ m multimode (OM1)
T = 50 μ m multimode
(OM2/OM3/OM4/OM4+)
E = Single-mode (OS2)
SMF-28e+®
H = ClearCurve® XB
Single-mode (OS2)

3 Defines cable type.

U = FREEDM® Gel-Free
Loose Tube Cable

4 Defines outer jacket.

F = Indoor/outdoor riser

5 Defines fiber placement.

T = 12 fibers/buffer tube
(standard)

6 Defines length markings.

4 = Markings in ft
(standard)

7 Defines tensile strength.

1 = See specifications

8 Select performance option code.

30 = 62.5 μ m multimode (OM1)
31 = 50 μ m multimode (OM2)
80 = 50 μ m multimode (OM3)
90 = 50 μ m multimode (OM4)
91 = 50 μ m multimode (OM4+)
01 = Single-mode (OS2)
(Max. attenuation 0.4/0.4/0.3 dB/km)

9 Defines cable type.

D = FREEDM Gel-Free
Loose Tube Cable

10 Defines special requirements.

20 = No special requirements

Note: This cable is available in 12 different jacket colors: blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. Black is the standard jacket color using the part number configurator above. Contact Customer Care at 1-800-743-2675 to order other color options.



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. Corning Optical Communications is ISO 9001 certified. © 2014 Corning Optical Communications. All rights reserved.

CORNING