

Data sheet


DCCS2 OM4 MPO link

Page 1/4

P/N
130D2F7MPAXXXE

2016-14-01

Illustrations

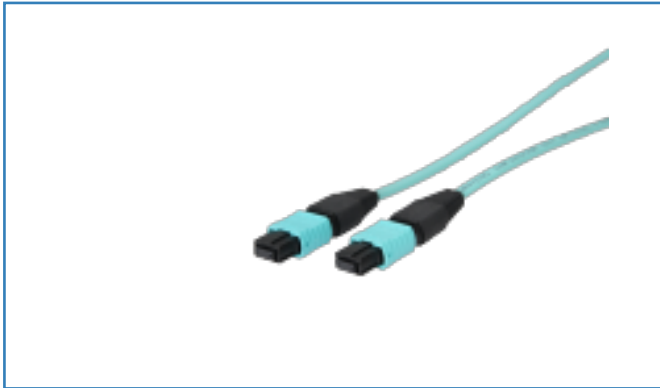

Product specification

- pre-assembled fiber optic link consisting of one 12-fiber connection cable with one MPO plug on each side (Ribbon style)
- especially suited for the DCCS2 system
- suitable for 10 GBit Ethernet (IEEE 802.3an) when combined with DCCS2 subassemblies MPO 6xLC-D
- full assignment of the 12 fibers; therefore also suitable for 40 GBit Ethernet (direct cabling)
- delivery with serial number and measuring reports
- available in prefabricated, customer specific lengths – replace xxx in the part number by the length – examples: 0050 = 5.0 m; 0100 = 10.0 m; 0995 = 99.5 m; 2000 = 200.0 m
- maximum length 500 m

- variants: SM (OS2), MM (OM4), MM (OM3)

Data sheet
DCCS2 OM4 MPO link

Technical Data

General Data

Fields of application	Data center
Design	Fiber optic link
Mounting style	DCCS
Transmission technology	Fiber optic
Color	heather violet
Mode type of the fiber	Multimode
Fiber class	OM4 (ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.3)
Cable Type	Connection cable (Ribbon style)
Number of cables/ cores	1
Number of fibres each cable/ wire	12
Fiber construction	50/125 µm
Maximum length	500.00 m

Connections/interfaces

Connector technology interface 1	MPO - Polarity, method A
Connector technology interface 2	MPO - Polarity, method A

Optical characteristics

Insertion loss	max. 0.35 dB
Return loss	min. 35 dB

Mechanical characteristics

Life - Number of mating cycles	min. 1000
Permanent tensile strength	70 N

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	IEC 61754-7
FOCIS - Fiber Optic Connector Intermateability Standard	TIA/EIA-604-5-D



Data sheet
OpDAT fiber OM4 BR

Technical Data

General Data	
Transmission technology	Fiber optic
Mode type of the fiber	Multimode
Fiber class	OM4 (ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.3)
Fiber construction	50/125 µm
Transmission characteristics	
Transmission rate up to 100 GBit	IEEE 802.3ba
Overfilled (OFL) modal bandwidth at 850 nm (min.)	3500 MHz * km
Overfilled (OFL) modal bandwidth at 1300 nm (min.)	500 MHz * km
Effective modal bandwidth (EMB) at 850 nm (min.)	4700 MHz * km
Connections/interfaces	
Connector technology interface 1	Free line end
Connector technology interface 2	Free line end
Fiber core diameter	50 ± 2.0 µm
Fasermanteldurchmesser	125.0 ± 1.0 µm
Primary coating diameter - colored	242 ± 5 µm
Primary coating diameter - uncolored	250 ± 15 µm
Mechanical characteristics	
Proof stress level	min. 0.7 (~ 1 %) GPa
Strip force (peak)	1.3 ≤ F _{peak.strip} ≤ 8.9 N
Fiber cladding non-circularity	max. 0.7 %
Core non-circularity	max. 5 %
Core (MDF)-cladding concentricity error	max. 1 µm
Primary coating concentricity error	max. 5 %
Primary coating-cladding concentricity error	max. 6
Inhomogeneity of OTDR measurement report at 1310 nm und 1550 nm	max. 0.1 dB/km
Numerical aperture	0.200 ± 0.015
Materials and material properties	
Bend insensitivity	yes



Data sheet
OpDAT fiber OM4 BR

Page 4/4

P/N
150XXX7

2016-14-01

Technical Data

The product meets the following standards

Generic cabling systems

General requirements	ISO/IEC 11801 DIN EN 50173-1 TIA/EIA 568-C
Data centers	ISO/IEC 24764

Optical fibers: Measuring methods and test procedures

Fibre geometry	ISO/IEC 60793-1-20
Coating geometry	ISO/IEC 60793-1-21
Length measurement	ISO/IEC 60793-1-22
Fibre proof test	ISO/IEC 60793-1-30
Coating strippability	ISO/IEC 60793-1-32
Attenuation	ISO/IEC 60793-1-40
Bandbreite	ISO/IEC 60793-1-41
Numerical aperture	ISO/IEC 60793-1-43
Gruppenlaufzeitdifferenz	ISO/IEC 60793-1-49

Optical fibers: Product specifications

Sectional specification for category A1 multimode fibres	ISO/IEC 60793-2-10 (A1a.3)
ITU-T standard	G.651.1
TIA/ANSI-492	AAAD

© 2015 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

