

Data sheet

OpDAT fix patch panel splice 12xST-D (metal), OS2, gray

Page 1/5

P/N

150259D112-E


EAN 4250184126997

2017-20-12

Illustrations



Dimensional drawing

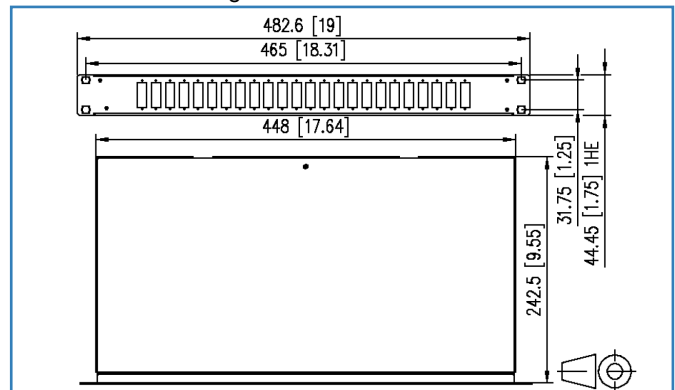

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- equipped with ST-D adapters and ST pigtails
- pigtails with semi-tight buffered fiber dia. 0.9 mm, 12 colors, secondary and primary coating in the same color, length 2.0 m
- pigtails inserted and stripped in standard splice trays with crimp splice holders
- pigtails are cleaned and plugged in adapters
- light aluminum construction with steel sheet front plate painted in RAL 7035
- unoccupied recesses are closed with blind plugs
- removable front plate for easy adapter mounting
- screwed on cover for easy access during service work
- installation depth 240 mm (without cable gland and adapters)
- several possibilities for cable entry on the back (fastening with PG13.5, PG16 and PG21 or M20 and M25)
- supplied with one PG16 cable gland
- Variants: equipped with 6, 12 or 24 ST-D adapters and pigtails each made of metal (OS2, OM4 oder OM4)



Data sheet

Page 2/5

OpDAT fix patch panel splice 12xST-D (metal), OS2, gray

P/N

150259D112-E

EAN 4250184126997

2017-20-12

Technical Data

General Data

Fields of application

Office

Data center

Design

patch panel

Mounting style

1RU

Transmission technology

Fiber optic

Port numbering

yes

Color

metallike

Dimensions

Dimension (L x W x H)

242.50 x 482.60 x 44.45 mm

Dimension (L x W x H)

9.547 x 19.00 x 1.75 in.

Inches

19 inches

Height unit

1RU

Installation depth

243.00 mm

Number of cables/ cores

24

Cable Type

pigtail(s)

Fiber class

OS2: IEC 60793-2-50 B6_a, B6_b & ITU-T G.657.A, G.652.D

Mode type of the fiber

Single mode

Fiber construction

9/125 µm

Labeling option

printed numbers

Connections/interfaces

Connector technology interface 1

ST-D Couplers

Connector technology interface 2

ST-D Couplers

Number of ports interface 1

24

Number of ports interface 2

24

Number of equipped ports interface 1

12

Number of ports interface 2 equipped

12

Number of ports with dust protection interface 2

12

Number of blind covers interface 2

12

Semi-tight buffered fiber pigtail length

2.00 m

Semi-tight buffered fiber pigtail length

6.56 ft

Semi-tight buffered fiber pigtail diameter

0.90 mm

Semi-tight buffered fiber pigtail diameter

0.035 in.

Cable access/outlet

several possibilities for cable entry on the back



OpDAT fix patch panel splice 12xST-D (metal), OS2, gray

P/N

150259D112-E

EAN 4250184126997

2017-20-12

Technical Data

Optical characteristics

Insertion loss	max. 0.3 dB
Return loss	min. 50 dB

Mechanical characteristics

Cut-out	SC-D, LC-Q, ST-D
Connector type	Duplex
Life - Number of mating cycles	min. 1000
strain relief	yes

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	sheet steel
Material - Front cover finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	metal

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Fibre optic connector interfaces	DIN EN 61754-2
Optical fibers: Indoor optical cables	
Sectional specification for class B single-mode fibres	ISO/IEC 60793-2-50 type B6_a/B6_b
Optical fibers - Interconnecting devices and passive components - basic test and measuring methods	
Fibre optic interconnecting devices and passive components	IEC 61300-3-4
Fibre optic interconnecting devices and passive components	IEC 61300-3-6
Fibre optic interconnecting devices and passive components	IEC 61300-3-35
Standard colours for insulation for low-frequency cables & wires	IEC 60304
ITU-T standard	ITU-T G.657.A compatible with ITU-T G.652.D



Data sheet

Page 4/5

**OpDAT fix patch panel splice
12xST-D (metal), OS2, gray**

P/N

150259D112-E

EAN 4250184126997

2017-20-12

Technical Data**Classifications**

ETIM 5.0	EC001130
ETIM 6.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------



Data sheet

**OpDAT fix patch panel splice
12xST-D (metal), OS2, gray**

Page 5/5

P/N


150259D112-E

EAN 4250184126997

2017-20-12

Illustrations

Dimensional drawing

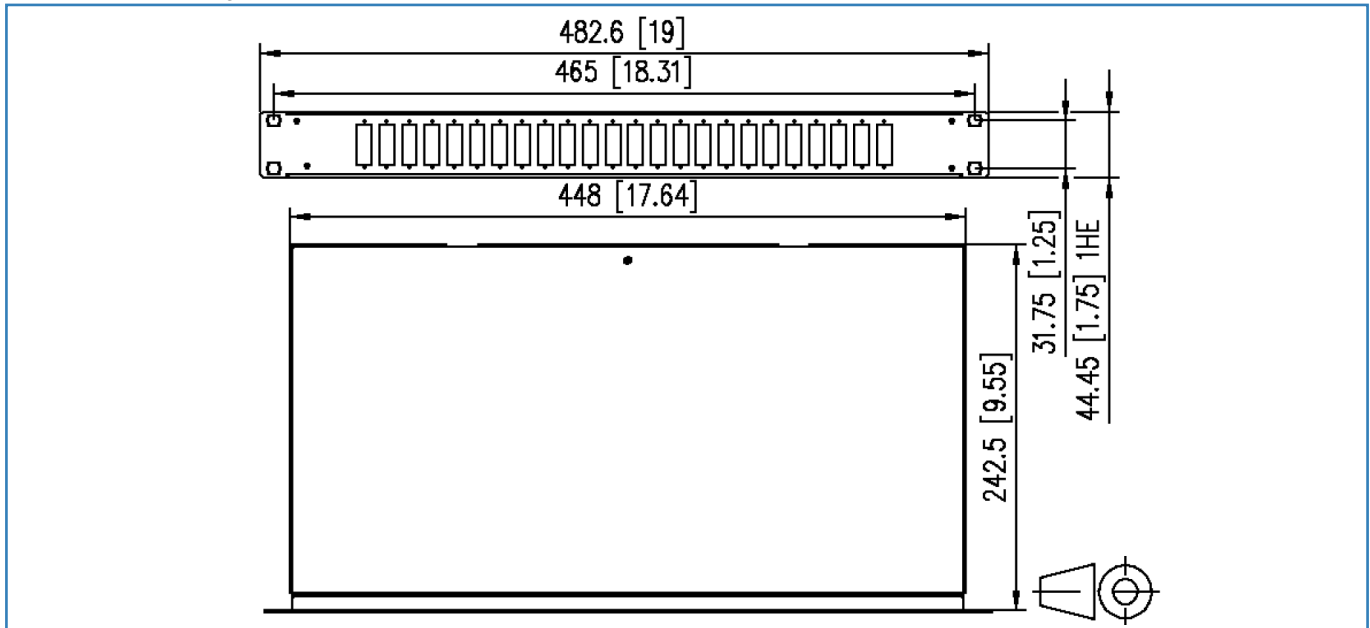

© 2017 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

