

## Data sheet


### Consolidation Point splice 6xSC-D OM3 (ceramic, aqua), pigtailed placed

Page 1/5


P/N  
150305BA06-E  
EAN 4251122197161

2018-13-03

## Illustrations

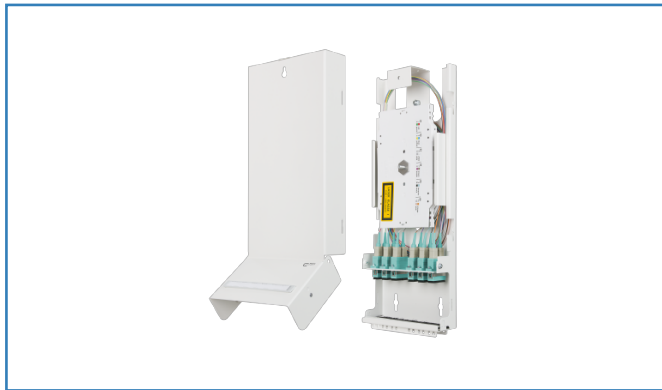

Dimensional drawing

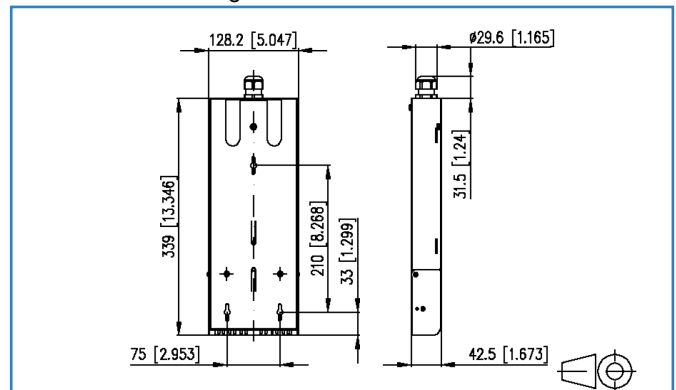

See enlarged drawings at the end of document

## Product specification

- Consolidation Point splice equipped
- Equipped with SC-D adapters, pigtailed and splice tray with crimp splice protection holders
- To splice loose tube cables
- Wall-mount powder-coated steel-sheet housing, (white, RAL 9010)
- Patch area with swing-open and removable cover with label field
- Possibility for strain relief for patch cord
- Not used cutouts are closed by blind plugs
- Cable management area with separate cover
- Possible cable entry on the back side for one PG16 cable gland
- If necessary order extensions or reductions for the fixing of the VIKs as separate accessory
- Supplied with material for wall-mounting
- Variants: equipped with 6 SC-D adapters and pigtailed, all blue (OS2), lime green (OM5), violet (OM4), aqua (OM3) or 6 SC-D APC adapters and pigtailed, all green (OS2)



## Data sheet

Page 2/5

# Consolidation Point splice 6xSC-D OM3 (ceramic, aqua), pigtails placed

P/N

150305BA06-E

EAN 4251122197161

2018-13-03

## Technical Data

### General Data

Fields of application	Structured building cabling, Office Data center
Transmission technology	Fiber optic
Color	aqua
Dimensions	
Dimension (L x W x H)	128.20 x 29.60 x 339.00 mm
Dimension (L x W x H)	5.047 x 1.165 x 13.346 in.
Number of cables/ cores	12
Cable Type	pigtail(s)
Fiber class	OM3: ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.2
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	label window with identification label + printed numbers

### Connections/interfaces

Connector technology interface 1	SC-D Couplers
Connector technology interface 2	SC-D Couplers
Number of ports interface 1	6
Number of ports interface 2	6
Number of equipped ports interface 1	6
Number of equipped ports interface 2	6
Number of ports with dust protection interface 1	6
Cable access/outlet	possibility for cable entry on the back

### Optical characteristics

Insertion loss	max. 0.4 dB
Return loss	min. 35 dB

### Mechanical characteristics

Connector type	Duplex
Life - Number of mating cycles	min. 1000
strain relief	yes



**Consolidation Point splice 6xSC-D OM3 (ceramic, aqua),  
pigtailed placed**

P/N

150305BA06-E

EAN 4251122197161

2018-13-03

**Technical Data**

**Materials and material properties**

Material - Housing	sheet steel
Material - Housing finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

**Approvals**

RoHS	compliant
------	-----------

**The product meets the following standards**

Fibre optic connector interfaces	DIN EN 61754-4
Optical fibers: Product specifications	
Sectional specification for category A1 multimode fibres	ISO/IEC 60793-2-10 (A1a.2)
Optical fibers - Interconnecting devices and passive components - basic test and measuring methods	
Fibre optic interconnecting devices and passive components	IEC 61300-3-4
Fibre optic interconnecting devices and passive components	IEC 61300-3-6
Fibre optic interconnecting devices and passive components	IEC 61300-3-35
Standard colours for insulation for low-frequency cables & wires	IEC 60304
ITU-T standard	G.651.1

**Classifications**

ETIM 6.0	EC001130
----------	----------

**Packing details**

Type of packaging	1 pc(s) / box
Packaging dimension (W x H x D)	470.00 x 200.00 x 60.00 mm
Packaging dimension (W x H x D)	18.504 x 7.874 x 2.362 in.

© 2018 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!



Data sheet

Page 4/5

## Consolidation Point splice 6xSC-D OM3 (ceramic, aqua), pigtailed placed

P/N

150305BA06-E

EAN 4251122197161

2018-13-03

### Accessories

P/N	Designation
15090401-I	OpDAT crimp splice protection (150 pcs)
15090401-E	OpDAT crimp splice protection (12 pcs)
150811P1613-E	Thread reducer PG16 to PG13.5
150811P1611-E	Thread reducer PG16 to PG11
150811P1621-E	Thread enlarger PG16 to PG21



## Consolidation Point splice 6xSC-D OM3 (ceramic, aqua), pigtailed placed

P/N  
150305BA06-E

EAN 4251122197161

2018-13-03

### Illustrations

Dimensional drawing

