

Data sheet

Consolidation Point splice 6xSC-D OM4 (ceramic, violet), pigtailed placed

Page 1/5

P/N

150307BB06-E


EAN 4251122194993

2018-13-03

Illustrations



Dimensional drawing

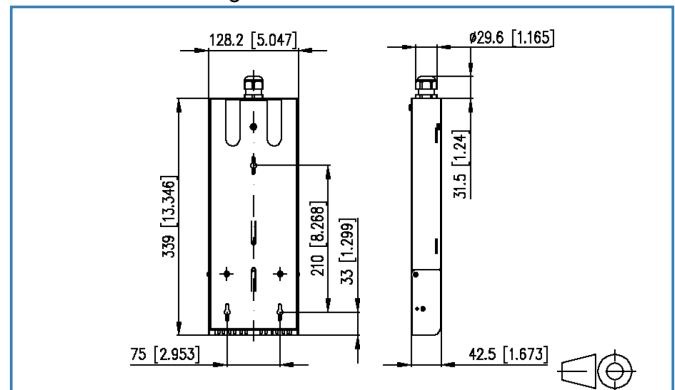

See enlarged drawings at the end of document

Product specification

- Consolidation Point splice equipped
- Equipped with SC-D adapters, pigtailed and splice tray with crimp splice protection holders
- To splice loose tube cables
- Wall-mount powder-coated steel-sheet housing, (white, RAL 9010)
- Patch area with swing-open and removable cover with label field
- Possibility for strain relief for patch cord
- Not used cutouts are closed by blind plugs
- Cable management area with separate cover
- Possible cable entry on the back side for one PG16 cable gland
- If necessary order extensions or reductions for the fixing of the VIKs as separate accessory
- Supplied with material for wall-mounting
- Variants: equipped with 6 SC-D adapters and pigtailed, all blue (OS2), lime green (OM5), violet (OM4), aqua (OM3) or 6 SC-D APC adapters and pigtailed, all green (OS2)



Data sheet

Page 2/5

Consolidation Point splice 6xSC-D OM4 (ceramic, violet), pigtails placed

P/N

150307BB06-E

EAN 4251122194993

2018-13-03

Technical Data

General Data

Fields of application	Structured building cabling, Office Data center
Transmission technology	Fiber optic
Color	violet
Dimensions	
Dimension (L x W x H)	128.20 x 29.60 x 339.00 mm
Dimension (L x W x H)	5.047 x 1.165 x 13.346 in.
Number of cables/ cores	12
Cable Type	pigtail(s)
Fiber class	OM4: ISO/IEC 11801/EN 50173 & IEC 60793-2-10/EN 60793-2-10 A1.a.3
Mode type of the fiber	Multimode
Fiber construction	50/125 µm
Labeling option	identification label

Connections/interfaces

Connector technology interface 1	SC-D Couplers
Connector technology interface 2	SC-D Couplers
Number of ports interface 1	6
Number of ports interface 2	6
Number of equipped ports interface 1	6
Number of equipped ports interface 2	6
Number of ports with dust protection interface 1	6
Cable access/outlet	possibility for cable entry on the back

Optical characteristics

Insertion loss	max. 0.4 dB
Return loss	min. 35 dB

Materials and material properties

Material - Housing	sheet steel
Material - Housing finish	powder-coated
Material - Sleeve	ceramic, slotted



Data sheet

Page 3/5

Consolidation Point splice 6xSC-D OM4 (ceramic, violet), pigtails placed

P/N

150307BB06-E

EAN 4251122194993

2018-13-03

Technical Data

Approvals

RoHS compliant

The product meets the following standards

Fibre optic connector interfaces DIN EN 61754-4

Optical fibers: Product specifications

Sectional specification for category A1 multimode fibres ISO/IEC 60793-2-10 (A1a.3)

Optical fibers - Interconnecting devices and passive components - basic test and measuring methods

Fibre optic interconnecting devices and passive components IEC 61300-3-4

Fibre optic interconnecting devices and passive components IEC 61300-3-6

Fibre optic interconnecting devices and passive components IEC 61300-3-35

Standard colours for insulation for low-frequency cables & wires IEC 60304

ITU-T standard G.651.1

Classifications

ETIM 6.0 EC001130

Packing details

Type of packaging 1 pc(s) / box

Packaging dimension (W x H x D) 470.00 x 200.00 x 60.00 mm

Packaging dimension (W x H x D) 18.504 x 7.874 x 2.362 in.



Data sheet

Page 4/5

Consolidation Point splice 6xSC-D OM4 (ceramic, violet), pigtaills placed

P/N

150307BB06-E

EAN 4251122194993

2018-13-03

Accessories

P/N	Designation
15090401-I	OpDAT crimp splice protection (150 pcs)
15090401-E	OpDAT crimp splice protection (12 pcs)
150811P1613-E	Thread reducer PG16 to PG13.5
150811P1611-E	Thread reducer PG16 to PG11
150811P1621-E	Thread enlarger PG16 to PG21



Consolidation Point splice 6xSC-D OM4 (ceramic, violet), pigtailed placed

P/N
150307BB06-E

EAN 4251122194993

2018-13-03

Illustrations

Dimensional drawing

