

RFP LC Uniboot to RFP LC Uniboot Patch cord, 2 fibres, Interconnect tight-buffered cable, LSZH

SMF-28® Ultra single-mode OS2, Low-Loss, 2 m

CORNING

EDGE™ Solutions jumpers are integrated reverse-polarity uniboot duplex assemblies that meet the high-density space requirements of the MDA and EDA and provide a 50-percent reduction in bulk cabling when compared to traditional duplex jumpers. The highly flexible, 2-fibre interconnect cable reduces cable congestion, improves jumper management and routing and improves air circulation.

Features and Benefits

Slim round 2-fibre interconnect cable, Uniboot style duplex connectors

Improve handling in high-density applications

Low loss connectivity

Enables system design flexibility

High performance by bend-insensitive ClearCurve® multimode or SMF-28® Ultra single-mode fibres


Designed to withstand tight bends and challenging cable routes

LC duplex Uniboot connector design

With changeable polarity option

Interchangeable Triggers

Available in 10 different colours

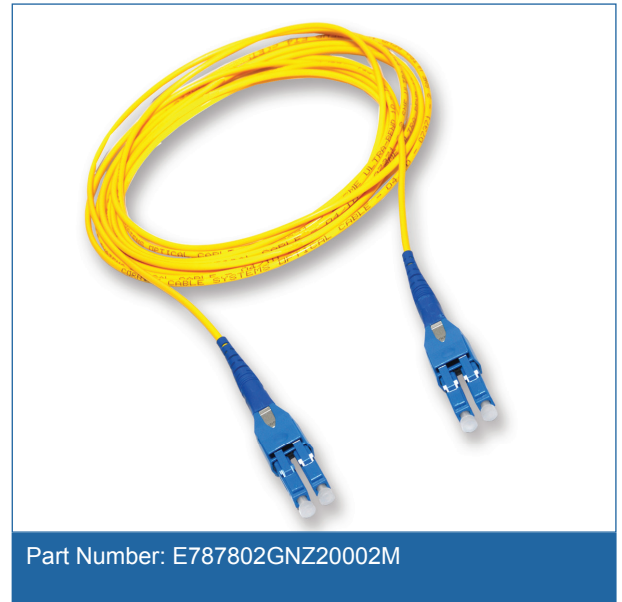

Standards

Intermateability TIA/EIA-6 4-10A604-10 / IEC 61754-20

Specifications

General Specifications	
Flame rating	LSZH™/FRNC
Cable assembly type	Two Fibre
Fibre Category	SMF-28® Ultra fibre
Product category	Core product / Fastship

RFP LC Uniboot to RFP LC Uniboot Patch cord, 2 fibres, Interconnect tight-buffered cable, LSZH

SMF-28® Ultra single-mode OS2, Low-Loss, 2 m

CORNING

Temperature Range

Operation	-10 °C to 60 °C
Installation and assembly	-5 °C to 50 °C
Storage	-10 °C to 60 °C

Design - Connector A

Connector type	LC Uniboot
Ferrule Material	Ceramic
Polish	UPC
Housing material	Composite
Housing Colour	Blue
Boot type	Uniboot
Boot colour	Blue
Keyed (security)	No

Mechanical Specifications - Connector A

Durability	≤ 0.2 dB 500 rematings, FOTP-21
Tensile strength jacketed cable	44 N

Optical Specifications - Connector A

Insertion loss, typical	0.1 dB
Insertion loss, max.	0.15 dB
Reflectance, typical	≤ -58 dB

Design - Connector B

Connector type	LC Uniboot
Ferrule Material	Ceramic
Polish	UPC
Housing material	Composite
Housing Colour	Blue
Boot type	Uniboot
Boot colour	Blue
Keyed (security)	No

RFP LC Uniboot to RFP LC Uniboot Patch cord, 2 fibres, Interconnect tight-buffered cable, LSZH

SMF-28® Ultra single-mode OS2, Low-Loss, 2 m

CORNING

Mechanical Specifications - Connector B

Durability	≤ 0.2 dB 500 rematings, FOTP-21
Tensile strength jacketed cable	44 N

Optical Specifications - Connector B

Insertion loss, typical	0.1 dB
Insertion loss, max.	0.15 dB
Reflectance, typical	≤ -58 dB

Cable Design

Fibre count	2
Outer diameter	2 mm
Outer jacket colour	Yellow
Outer jacket material	LSZH™/FRNC
Minimum Bend Radius	10 mm
Crush resistance (reversible)	1000 N/10 cm
Tensile strength	150 N

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fibre Specifications

Optical Characteristics (cabled)

Fibre name	SMF-28® Ultra TB Cable Optical Fibre
Mode-Field Diameter at 1310 nm	9.2 µm
Fibre code	Z
Coating diameter	242 µm
Cladding diameter	125 µm
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum attenuation	0.38 dB/km / 0.38 dB/km / 0.25 dB/km
Serial 1 gigabit ethernet	5000 m / -
Serial 10 gigabit ethernet	10000 m / 40000 m
Cable cutoff wavelength	1260 nm

Notes: 1) Contact a Corning Customer Care Representative for additional information

RFP LC Uniboot to RFP LC Uniboot Patch cord, 2 fibres, Interconnect tight-buffered cable, LSZH

SMF-28® Ultra single-mode OS2, Low-Loss, 2 m

CORNING

Fibre Specifications

Optical Characteristics (cabled)	
Cable cutoff wavelength	1260 nm
Dispersion in the range 1285 to 1330 nm	≤ 3.5 ps / (nm * km)
Dispersion @ 1550 nm	≤ 18 ps / (nm * km)
PMD Link Design Value	≤ 0.04 PS / $\sqrt{\text{km}}$
PMD maximum individual fibre	≤ 0.1 PS / $\sqrt{\text{km}}$
Fibre compliance	ITU-T G.652.D and ITU-T G.657.A1

Notes: 1) Contact a Corning Customer Care Representative for additional information

Ordering Information

Part Number	E787802GNZ20002M
Product Description	EDGE™ Solutions Low-loss Patchcord, LC duplex uniboot connectors, SMF-28® Ultra OS2, standard reverse fibre polarity, LSZH/FRNC jacket, yellow, 2 m
EAN Code	4042673326571
Length	2 m
Weight	0.0142 kg

Shipping Information

Packing type	Cardboard box
Packing dimensions (L x W x H)	380 mm x 250 mm x 180 mm
Units Per Delivery	1/1



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY
00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified.
© 2018 Corning Optical Communications. All rights reserved.