

EDGE™ Extender Trunk

Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 144 F, with 33/60 inch legs, pulling grip one side, 100 ft

CORNING

The EDGE™ MTP® Extender Trunks provide additional distance for the backbone of the EDGE Solution. With a non-pinned MTP on one end of the cable, a pinned MTP on the other and a TIA-568 Type-A polarity, these trunks are designed to interface with a EDGE or Plug & Play™ module and an MTP trunk. All trunks are shipped with strain-relief clips that allow for the tool-less installation in both EDGE and Plug & Play housings. Most often these extender trunks will be used in a Zone Distribution Area (ZDA).

Features and Benefits

High-density trunk cables

Allow tighter trunk cable bends for slack storage and routing

Low insertion loss performance

Allows for more connections in a link when deploying a TIA-942-compliant system

Universal wired components

Enable moves, adds and changes without polarity concerns; provide a simple migration path between 2-fiber and parallel optic applications

Factory-terminated solutions


Provide consistent quality, ensure system performance, and reduce installation time

Standards

Approvals and Listings NFPA 262, National Electrical Code® (NEC®), OFNP, CSA FT-6

Specifications

General Specifications	
Application	Data Center LAN/SAN
Cable Type	Indoor; ANSI/ICEA S-83-596
Flame Rating	Plenum (OFNP)
Cable Assembly Type	EDGE™ Extender Trunk
Fiber Category	Bend-improved SM (OS2)

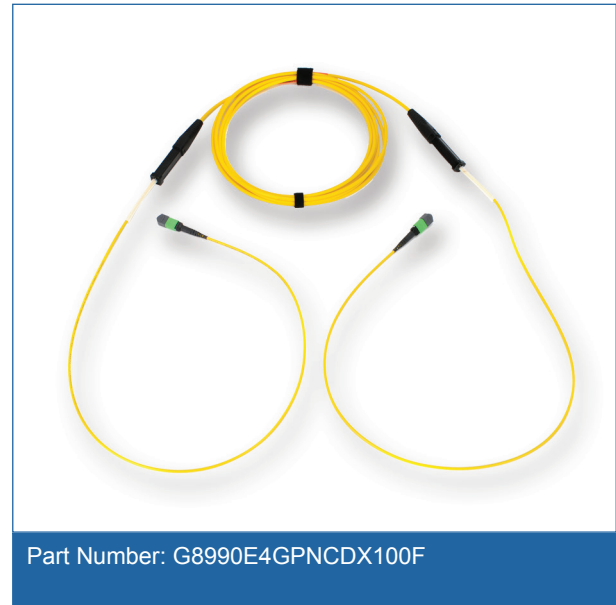

EDGE™ Extender Trunk

Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 144 F, with 33/60 inch legs, pulling grip one side, 100 ft



Temperature Range

Operation	-10 °C to 60 °C (14 °F to 140 °F)
-----------	-----------------------------------

Design - Connector A

Connector Type	MTP® (pinned)
Ferrule Material	Composite

Optical Specifications - Connector A

Insertion Loss, Max.	0.75 dB
Reflectance	< -55 dB

Design - Connector B

Connector Type	MTP® (non-pinned)
Ferrule Material	Composite

Optical Specifications - Connector B

Insertion Loss, Max.	0.75 dB
Reflectance	< -55 dB

Cable Design

Fiber Count	144
Outer Jacket Color	Yellow
Polarity	Extender; TIA-568 Type-A

Mechanical Characteristics Cable

Nominal Outer Diameter	12.5 mm ± 0.3 mm
Min. Bend Radius Installation	187.5 mm (7.38 in)
Min. Bend Radius Operation	62.5 mm (2.46 in)
Max. Tensile Strength for Installation	660 N
Weight	122 kg/km (82 lb/1000 ft)

EDGE™ Extender Trunk

Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 144 F, with 33/60 inch legs, pulling grip one side, 100 ft



Furcation - Connector A

Leg Length	1,524 mm (-0 mm/+76 mm) (60 in (-0 in/+3 in))
Leg Color	Yellow
Leg Diameter	2.0 mm
Furcation Type - A	EDGE™ Size 2; 20 mm x 20 mm x 108.6 mm

Furcation - Connector B

Leg Length	838 mm (-0 mm/+76 mm) (33 in (-0 in/+3 in))
Leg Color	Yellow
Leg Diameter	2.0 mm
Furcation Type - B	EDGE™ Size 2; 20 mm x 20 mm x 108.6 mm

Pulling Grip - Connector A

Pulling Grip - Connector A	Yes
Pulling Grip Outer Diameter	56 mm (2.2 in)
Min. Duct Size Diameter	89 mm (3.5 in)
Tensile Strength	440 N (100 lb)

Pulling Grip - Connector B

Pulling Grip - Connector B	No
----------------------------	----

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Type	Single-Mode Ultra-Bendable Fiber
Fiber Core Diameter	8.2 μm

* ITU-T G.652 D compliant.

* Meets 0.75 ns optical skew when used in all Corning Plug and Play™/EDGE™ systems solutions.

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

EDGE™ Extender Trunk

Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 144 F, with 33/60 inch legs, pulling grip one side, 100 ft



Fiber Specifications

Optical Characteristics (cabled)	
Fiber Category	OS2
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1
Fiber Code	G
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Serial 1 Gigabit Ethernet	5000 m / - / -
Serial 10 Gigabit Ethernet	10000 m / - / 40000 m
Induced Attenuation @ 10 mm Radius	0.5 dB (1 turn; 10 mm radius; 1550 nm)

* ITU-T G.652 D compliant.

* Meets 0.75 ns optical skew when used in all Corning Plug and Play™/EDGE™ systems solutions.

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

Ordering Information

Part Number	G8990E4GPNCDX100F
Product Description	EDGE™ Solutions Extender Trunk, Bend-improved Single-mode (OS2), MTP® Connector to MTP Connector, 144 F, with 33/60 inch legs, pulling grip one side, 100 ft
EAN Code	4056418687124
Weight	5.3 kg (11.7 lb)
Length	100 ft (-0 ft/+2 ft) (30 m (-0 m/+0.61 m))

Shipping Information

Units per Delivery	1/1
Reel Diameter	23.5 in
Reel Width	5 in



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

