

Reel In A Box, MIC[®] Tight-Buffered Cable, Riser


2 F, Single-mode (OS2)

CORNING

Reel in a Box is Corning's innovative packaging solution for small reels of fiber optic cable in all inside plant applications, such as collocation data centers and wireless projects. This packaging solution provides features that enable our customers greater efficiencies than before.

Corning MIC[®] riser cables are designed for use in riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use 900 μm buffered fibers to enable easy, consistent stripping and facilitate termination. The fibers are surrounded by dielectric strength members and protected by a flame-retardant outer jacket.

The all-dielectric cable construction requires no grounding or bonding. MIC riser cables are ideal for routing inside buildings, within plenum areas and riser shafts, to the telecommunications rooms and workstations. The MIC riser cables meet the application requirements of the National Electrical Code[®] (NEC[®]) Article 770 and are OFNR and FT-4 listed.

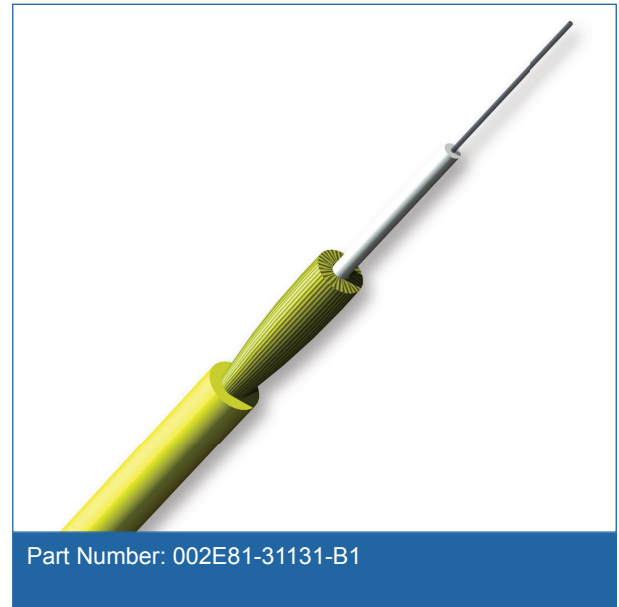

Features and Benefits

"Countdown" print indicates available cable remaining on the reel providing easier inventory management

Stackable boxes make storage more manageable

Smaller reel offerings mean smaller cable lengths than would normally be available

Cable cutting at Corning lowers operating expenses for our distributors and end users


Standards

Listings

National Electrical Code[®] (NEC[®]) OFNR, CSA FT-4, ICEA S-83-596

Flame Resistance

UL-1666 (for riser and general building applications)

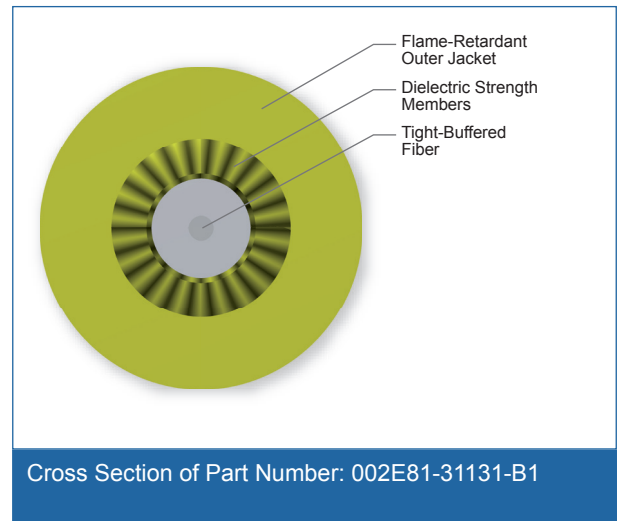

Reel In A Box, MIC[®] Tight-Buffered Cable, Riser

2 F, Single-mode (OS2)

CORNING

Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser
Cable Type	Tight-Buffered
Product Type	Distribution
Flame Rating	Riser (OFNR)
Fiber Category	Single-mode (OS2)
Fiber Length	150 m (500 ft)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	2
Tight Buffer Color	Blue, Orange
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Yellow

Mechanical Characteristics Cable	
Max. Tensile Strength, Short-Term	660 N (150 lbf)
Max. Tensile Strength, Long-Term	200 N (45 lbf)
Nominal Outer Diameter	4.3 mm (0.17 in)
Weight	14.7 kg/km (9.88 lb/1000 ft)
Min. Bend Radius Installation	64.5 mm (2.5 in)
Min. Bend Radius Operation	43 mm (1.7 in)

Reel In A Box, MIC[®] Tight-Buffered Cable, Riser

2 F, Single-mode (OS2)



Fiber Specifications

Optical Characteristics (cabled)	
Fiber Name	SMF-28e [®] fiber
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	31
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.4 dB/km

Ordering Information

Part Number	002E81-31131-B1
Product Description	Reel in a Box, MIC [®] Tight-Buffered Cable, Riser, 2 F, Single-mode (OS2)
EAN Code	4056418154220

Shipping Information

Packaging Method	Reel In A Box
Dimensions (HxWxD)	39.37 cm x 39.37 cm x 38.73 cm (15.5 in x 15.5 in x 15.25 in)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2018 Corning Optical Communications. All rights reserved.