

# Reel In A Box, MIC<sup>®</sup> Tight-Buffered Cable, Riser


4 F, 50  $\mu$ m multimode (OM3)

CORNING

Reel in a Box is Corning's innovative packaging solution for small reels of fiber optic cable in all inside plant applications, such as collocation data centers and wireless projects. This packaging solution provides features that enable our customers greater efficiencies than before.

Corning MIC<sup>®</sup> riser cables are designed for use in riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use 900  $\mu$ m buffered fibers to enable easy, consistent stripping and facilitate termination. The fibers are surrounded by dielectric strength members and protected by a flame-retardant outer jacket.

The all-dielectric cable construction requires no grounding or bonding. MIC riser cables are ideal for routing inside buildings, within plenum areas and riser shafts, to the telecommunications rooms and workstations. The MIC riser cables meet the application requirements of the National Electrical Code<sup>®</sup> (NEC<sup>®</sup>) Article 770 and are OFNR and FT-4 listed.

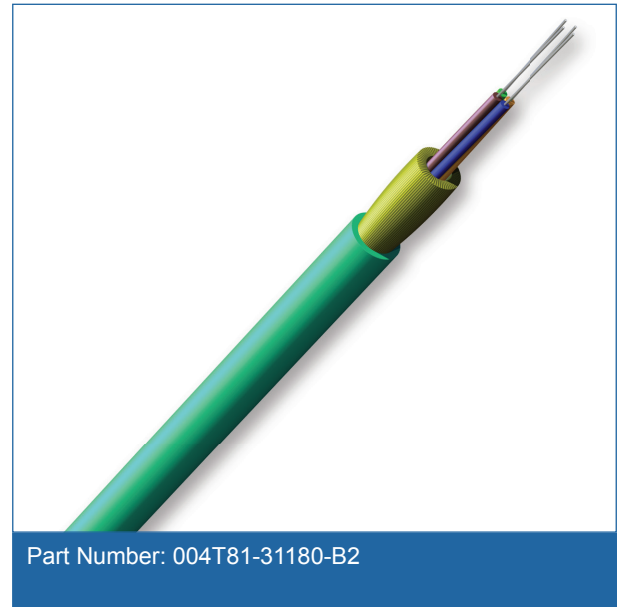

## Features and Benefits

"Countdown" print indicates available cable remaining on the reel providing easier inventory management

Stackable boxes make storage more manageable

Smaller reel offerings mean smaller cable lengths than would normally be available

Cable cutting at Corning lowers operating expenses for our distributors and end users


## Standards

### Listings

National Electrical Code<sup>®</sup> (NEC<sup>®</sup>) OFNR, CSA FT-4, ICEA S-83-596

### Flame Resistance

UL-1666 (for riser and general building applications)

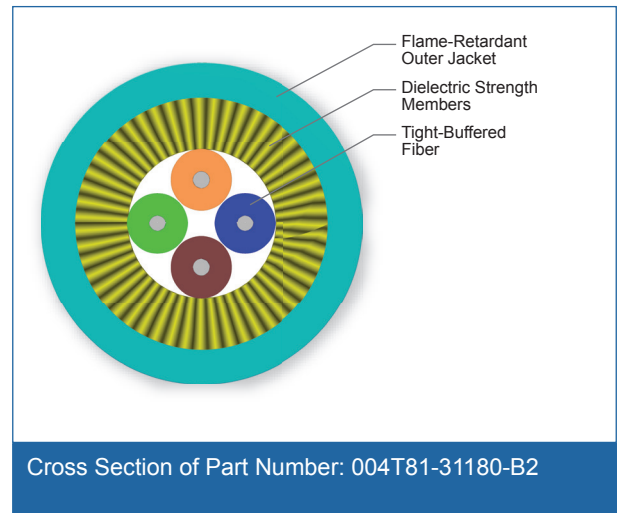

# Reel In A Box, MIC<sup>®</sup> Tight-Buffered Cable, Riser

4 F, 50 µm multimode (OM3)

CORNING

## Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser
Cable Type	Tight-Buffered
Product Type	Distribution
Flame Rating	Riser (OFNR)
Fiber Category	50 µm MM (OM3)
Fiber Length	300 m (1000 ft)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	4
Tight Buffer Color	Blue, Orange, Green, Brown
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Aqua

Mechanical Characteristics Cable	
Max. Tensile Strength, Short-Term	660 N (150 lbf)
Max. Tensile Strength, Long-Term	200 N (45 lbf)
Nominal Outer Diameter	4.6 mm (.18 in)
Weight	17.6 kg/km (11.82 lb/1000 ft)
Min. Bend Radius Installation	69 mm (2.7 in)
Min. Bend Radius Operation	46 mm (1.8 in)

# Reel In A Box, MIC<sup>®</sup> Tight-Buffered Cable, Riser

4 F, 50 µm multimode (OM3)

CORNING

## Fiber Specifications

Optical Characteristics (cabled)	
Fiber Core Diameter	50 µm
Fiber Category	OM3
Fiber Code	T
Performance Option Code	80
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	1000 m / 600 m
Serial 10 Gigabit Ethernet	300 m / -
Min. Overfilled Launch (OFL) Bandwidth	1500 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	2000 MHz*km / -

## Ordering Information

Part Number	004T81-31180-B2
Product Description	Reel in a Box, MIC <sup>®</sup> Tight-Buffered Cable, Riser, 4 F, 50 µm multimode (OM3)
EAN Code	4056418152752

## Shipping Information

Packaging Method	Reel In A Box
Dimensions (HxWxD)	39.37 cm x 39.37 cm x 38.73 cm (15.5 in x 15.5 in x 15.25 in)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2018 Corning Optical Communications. All rights reserved.

CORNING