

# MIC<sup>®</sup> DX Tight-Buffered Armored Cable, Plenum

6 F, Single-mode (OS2)

CORNING

Corning MIC<sup>®</sup> DX armored plenum cables are standard MIC subunits placed inside a dielectric armor for ruggedness and superior crush resistance without the conductive properties of traditional armor. These cables are designed for use in intrabuilding backbone and horizontal installations. Individually jacketed TBII<sup>®</sup> buffered fibers enable easy, consistent stripping and facilitate termination.

The fibers are stranded around a dielectric central member that is protected by a flexible, all-dielectric armor offering easy, one-step installation and over four times the crush protection of unarmored cables. With a flame-retardant outer jacket, this cable is particularly useful for heavy traffic or more challenging mechanical exposure conditions and applications requiring extra rugged cables.

*This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

## Features and Benefits

### Dielectric armor

Four times crush protection compared to unarmored

### TBII buffered fibers

Easy, consistent stripping

### Flame-retardant jacket

Rugged and durable

### Easy armor removal

Increased safety and speed at installation



## Standards

### Approvals and Listings

National Electrical Code<sup>®</sup>  
(NEC<sup>®</sup>) OFNP, CSA FT-6,  
ICEA S-83-596

### Flame Resistance

NFPA 262 (for plenum, riser and general building applications)

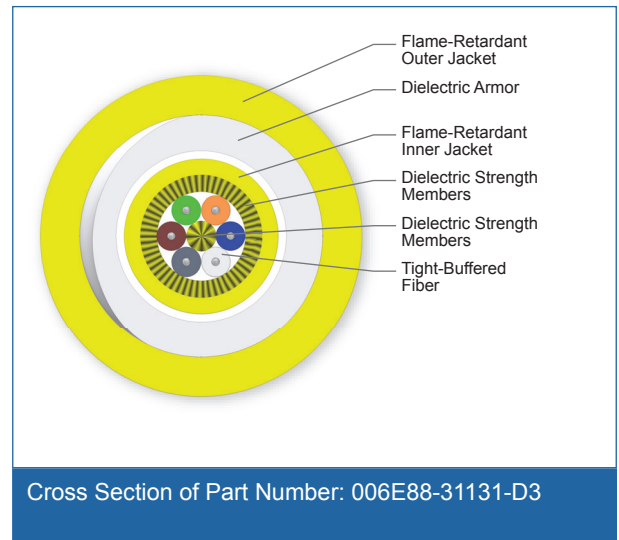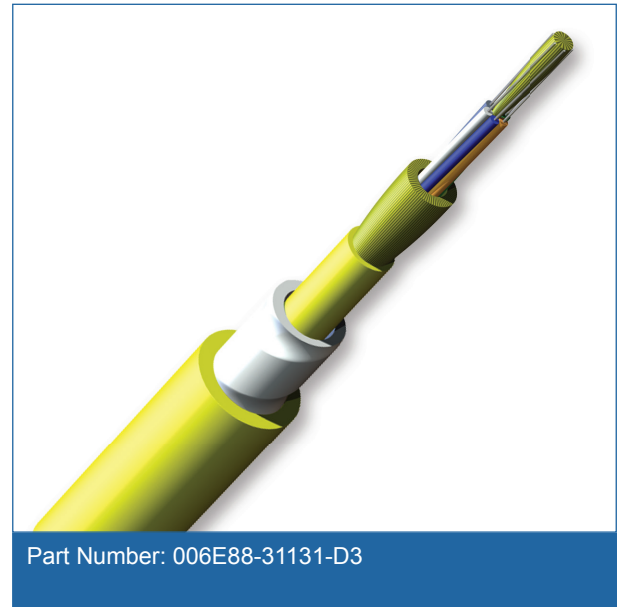

# MIC<sup>®</sup> DX Tight-Buffered Armored Cable, Plenum

6 F, Single-mode (OS2)

CORNING

## Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Plenum
Cable Type	Tight-Buffered
Product Type	Dielectric armor
Flame Rating	Plenum (OFNP)
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (32 °F to 140 °F)
Operation	0 °C to 70 °C (32 °F to 158 °F)

Cable Design	
Fiber Count	6
Tight Buffer Color	Blue, Orange, Green, Brown, Slate, White
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Inner Jacket Material	Flame-retardant
Tensile Strength Elements and/or Armoring - Layer 3	Interlocking armor
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Yellow

Mechanical Characteristics Cable	
Nominal Inner Cable Diameter	4.4 mm (0.17 in)
Nominal Outer Diameter	10.5 mm (0.41 in)
Weight	123.9 kg/km (83.3 lb/1000 ft)
Max. Tensile Strength, Short-Term	890 N (200 lbf)
Max. Tensile Strength, Long-Term	444 N (100 lbf)
Min. Bend Radius Installation	158 mm (6.2 in)
Min. Bend Radius Operation	105 mm (4.1 in)

# MIC<sup>®</sup> DX Tight-Buffered Armored Cable, Plenum

6 F, Single-mode (OS2)



## Fiber Specifications

Optical Characteristics (cabled)	
Fiber Name	SMF-28e <sup>®</sup> fiber
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	31
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.65 dB/km / 0.65 dB/km / 0.50 dB/km

## Ordering Information

Part Number	006E88-31131-D3
Product Description	MIC <sup>®</sup> DX Tight-Buffered Armored Cable, Plenum, 6 F, Single-mode (OS2)
EAN Code	4056418179094



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

