

# ActiFi™ FREEDM® DAS Cables for Indoor/ Outdoor Riser

6 F, 2 Cu Conductor, 16AWG

CORNING

Corning ActiFi™ FREEDM® Cables provide the ultimate solution for indoor-outdoor remote powering of distributed antenna systems (DAS). The designs use 6-, 12- or 24-fiber cables with 2, 4, 6 or 12 copper conductors. The gauge of wire (14 or 16 AWG) necessary to power the remote active gear determines distance traveled and strength required.

Corning ActiFi™ FREEDM® Cables provide a time and cost-saving solution for installations requiring remotely-powered equipment. By integrating copper and fiber in one cable, ActiFi FREEDM Cables eliminate the need to install separate power and fiber cables. This saves installation time, labor costs and duct or tray space. The compact and versatile design is available in riser or interlocking armored riser for additional protection where conduit may not be feasible.

## Features and Benefits

### 14 or 16 AWG copper conductor

Power transmission with flexibility in design

### 4-, 6-, 12- or 24-fibers

Readily identifiable

### Individual fibers

Easily accessible for splicing

### ClearCurve® ZBL or SMF-28® Ultra fibers

Reliable performance in challenging routes

### 2-in-1 composite cable design



One cable meets power and signal needs

## Standards

**Approvals and Listings** Fibers compliant with ITU-T G.652.D and G.657.B3

**Common Installations** Compliant with ICEA S-83-596 (compliant at tensile loads listed in the specifications table)

**Design and Test Criteria** Compliant with UL-13 and NEC 725 Class 2 (CL2P)

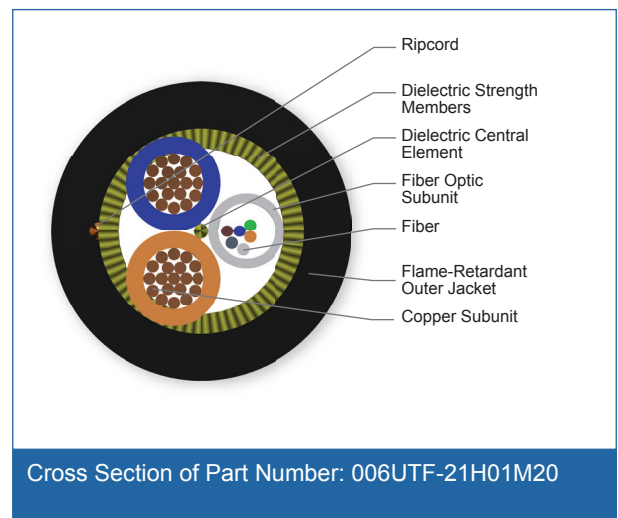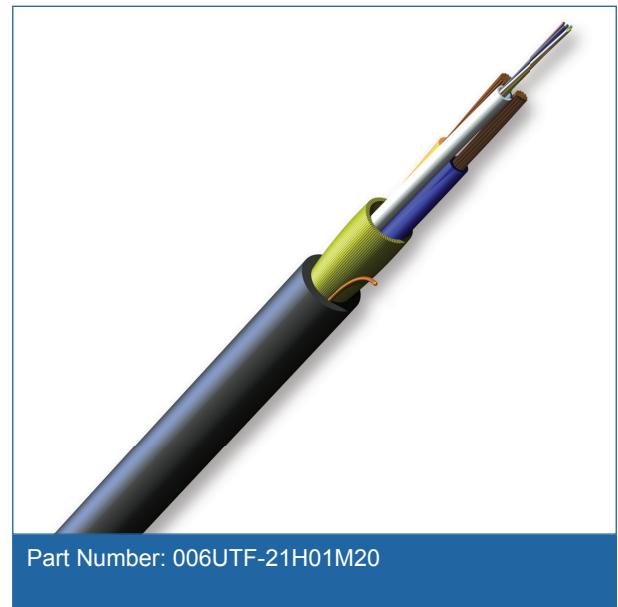

# ActiFi™ FREEDM® DAS Cables for Indoor/ Outdoor Riser

6 F, 2 Cu Conductor, 16AWG

CORNING

## Specifications

### General Specifications

Environment	Indoor/Outdoor
Application	Vertical Riser
Cable Type	Loose Tube
Fiber Category	ClearCurve® ZBL Single-mode (OS2)

### Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (14 °F to 140 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

### Cable Design

Central Element	Jacketed GRP
Fiber Count	6
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White
Fibers per Tube	6
Number of Tube Positions	1
Number of Active Tubes	1
Buffer Tube Color Coding	Yellow
Buffer Tube Diameter	1.6 mm (0.06 in)
Number of Ripcords	1
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Black
Conductor	16 AWG
Number of Conductors	2

### Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	810 N (180 lbf)
Weight	57 kg/km (38 lb/1000 ft)
Nominal Outer Diameter	7.0 mm (0.28 in)
Min. Bend Radius Installation	105 mm (4.13 in)
Min. Bend Radius Operation	70 mm (2.76 in)

# ActiFi™ FREEDM® DAS Cables for Indoor/ Outdoor Riser

6 F, 2 Cu Conductor, 16AWG

CORNING

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	ClearCurve® ZBL
Fiber Category	G.657.B3/G.652.D
Fiber Code	U
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Typical Attenuation*	0.35 dB/km / 0.35 dB/km / 0.20 dB/km

\* For more information on typical attenuation please see the Corning whitepaper at [http://csmedia.corning.com/opcomm//Resource\\_Documents/whitepapers\\_rl/LAN-1863-AEN.pdf](http://csmedia.corning.com/opcomm//Resource_Documents/whitepapers_rl/LAN-1863-AEN.pdf)

## Ordering Information

Part Number	006UTF-21H01M20
Product Description	ActiFi™ FREEDM® DAS Cables for Indoor/Outdoor Riser, 6 F, 2 Cu Conductor, 16AWG
EAN Code	4056418146744



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2018 Corning Optical Communications. All rights reserved.

CORNING