

MIC® DX Tight-Buffered Armored Cable, Plenum

12 F, 50 µm multimode, extended 10G distance (OM4)

CORNING

Corning MIC® DX armored plenum cables are standard MIC subunits placed inside a dielectric armor for ruggedness and superior crush resistance without the conductive properties of traditional armor. These cables are designed for use in intrabuilding backbone and horizontal installations. Individually jacketed TBII® buffered fibers enable easy, consistent stripping and facilitate termination.

The fibers are stranded around a dielectric central member that is protected by a flexible, all-dielectric armor offering easy, one-step installation and over four times the crush protection of unarmored cables. With a flame-retardant outer jacket, this cable is particularly useful for heavy traffic or more challenging mechanical exposure conditions and applications requiring extra rugged cables.

This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

Features and Benefits

Dielectric armor

Four times crush protection compared to unarmored

TBII buffered fibers

Easy, consistent stripping

Flame-retardant jacket

Rugged and durable

Easy armor removal

Increased safety and speed at installation



Standards

Approvals and Listings

National Electrical Code® (NEC®) OFNP, CSA FT-6, ICEA S-83-596

Flame Resistance

NFPA 262 (for plenum, riser and general building applications)

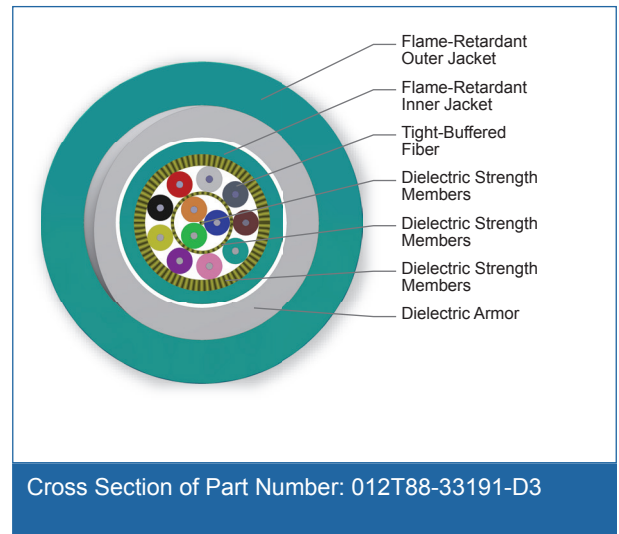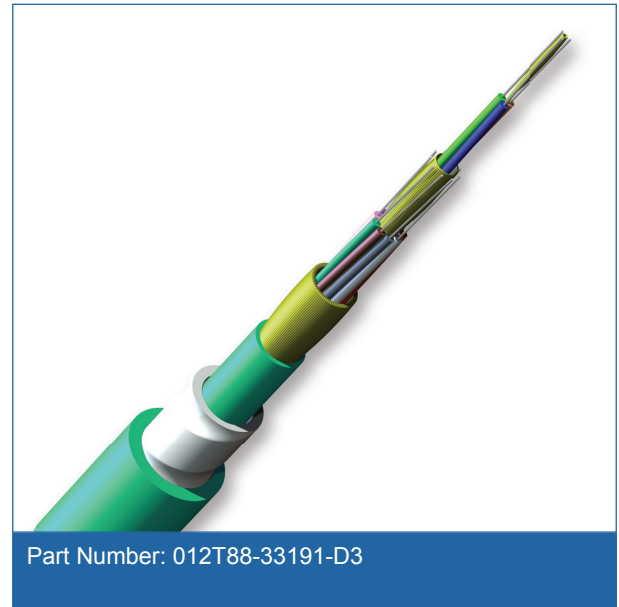

MIC[®] DX Tight-Buffered Armored Cable, Plenum

12 F, 50 µm multimode, extended 10G distance (OM4)

CORNING

Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Plenum
Cable Type	Tight-Buffered
Product Type	Dielectric armor
Flame Rating	Plenum (OFNP)
Fiber Category	50 µm MM (OM4+)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (32 °F to 140 °F)
Operation	0 °C to 70 °C (32 °F to 158 °F)

Cable Design	
Fiber Count	12
Tight Buffer Color	Blue, Orange, Green
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tight Buffer Color, Layer 2	Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Tensile Strength Elements and/or Armoring - Layer 2	Dielectric strength members
Inner Jacket Material	Flame-retardant
Tensile Strength Elements and/or Armoring - Layer 3	Dielectric armor
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Aqua

Mechanical Characteristics Cable	
Weight	150.8 kg/km (101 lb/1000 ft)
Nominal Inner Cable Diameter	5.6 mm (0.22 in)
Nominal Outer Diameter	11.5 mm (0.45 in)
Max. Tensile Strength, Short-Term	1000 N (225 lbf)
Max. Tensile Strength, Long-Term	593 N (133 lbf)
Min. Bend Radius Installation	173 mm (6.8 in)
Min. Bend Radius Operation	115 mm (4.5 in)

MIC[®] DX Tight-Buffered Armored Cable, Plenum

12 F, 50 µm multimode, extended 10G distance (OM4)



Fiber Specifications

Optical Characteristics (cabled)	
Fiber Core Diameter	50 µm
Fiber Category	OM4 Extended Distance
Fiber Code	T
Performance Option Code	91
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	3.0 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	1100 m / 600 m
Serial 10 Gigabit Ethernet	600 m / -
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	5350 MHz*km / -

Ordering Information

Part Number	012T88-33191-D3
Product Description	MIC [®] DX Tight-Buffered Armored Cable, Plenum, 12 F, 50 µm multimode, extended 10G distance (OM4)
EAN Code	4056418171746



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

