

# Fan-Out Tight-Buffered Cable, Riser

16 F, 1.65 mm Subunits, 50  $\mu\text{m}$  multimode, extended 10G distance (OM4)

CORNING

Corning fan-out riser cables are designed for use in building backbone and horizontal cabling. These multifiber cables use individually jacketed 900  $\mu\text{m}$  TBII Buffered Fibers enabling easy, consistent stripping and facilitating termination. The fibers are stranded around a dielectric central member with a flame-retardant outer jacket, making this cable particularly useful for applications requiring direct connection to terminal equipment or requiring extra rugged cables.

*This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

## Features and Benefits

### 900 $\mu\text{m}$ Buffered Fibers

Easy, consistent stripping

### Flame-retardant jacket

Rugged and durable

### All-dielectric construction

Requires no grounding or bonding


## Standards

### Approvals and Listings

National Electrical Code® (NEC®) OFNR, CSA FT-4, ICEA S-83-596

### Flame Resistance

UL-1666 (for riser and general building applications)

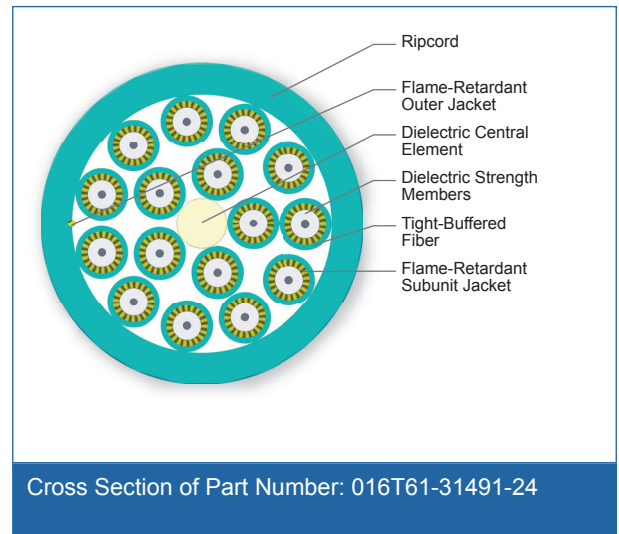

# Fan-Out Tight-Buffered Cable, Riser

16 F, 1.65 mm Subunits, 50  $\mu$ m multimode, extended 10G distance (OM4)

CORNING

## Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser
Cable Type	Tight-Buffered
Product Type	Distribution
Flame Rating	Riser (OFNR)
Fiber Category	50 $\mu$ m MM (OM4+)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	16
Tight Buffer Color	White
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Subunit Jacket Material	Flame-retardant
Subunit Color	Aqua
Number of Subunits Layer 1	5
Tensile Strength Elements and/or Armoring - Layer 2	Dielectric strength members
Number of Subunits Layer 2	11
Tensile Strength Elements and/or Armoring - Layer 3	Dielectric strength members
Number of Ripcords	1
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Aqua
Subunit Diameter	

Mechanical Characteristics Cable	
Weight	81 kg/km (54 lb/1000 ft)
Nominal Outer Diameter	10.3 mm (0.4 in)
Max. Tensile Strength, Short-Term	1320 N (300 lbf)

# Fan-Out Tight-Buffered Cable, Riser

16 F, 1.65 mm Subunits, 50 µm multimode, extended 10G distance (OM4)



## Mechanical Characteristics Cable

Max. Tensile Strength, Long-Term	400 N (90 lbf)
Min. Bend Radius Installation	155 mm (6.1 in)
Min. Bend Radius Operation	103 mm (4.1 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	50 µm
Fiber Category	OM4 Extended Distance
Fiber Code	T
Performance Option Code	91
Wavelengths	850 nm / 1300 nm
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	1100 m / 600 m
Serial 10 Gigabit Ethernet	600 m / -
Min. Overfilled Launch (OFL) Bandwidth	3500 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	5350 MHz*km / -

## Ordering Information

Part Number	016T61-31491-24
Product Description	Fan-Out Tight-Buffered Cable, Riser, 16 F, 1.65 mm Subunits, 50 µm multimode, extended 10G distance (OM4)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

