

# LC to LC Patch cord, 1 fibre, tight-buffered cable, LSZH, 2.0 mm legs

E9/125 SMF-28® ULTRA TB, 15 m

CORNING

Patch cables are used for non-permanent connections between patch panels, transmission equipment, etc. Pre-assembled cables allow for the implementation of complete Plug & Play solutions. When such a solution is adopted with accurate dimensioning and appropriate cable routing, it is possible to install even large cabling systems rapidly.


## Features and Benefits

### Connectors

- LC connector according to TIA/EIA-604 -10
- All connectors are tested to FOTP -21
- Connectors are pre-radius polished to provide the optimal end-face geometry for long-term performance

### Cable

- Low smoke (IEC 61034) and zero-halogen (LSZH), flame retardant to IEC 60332-3-24 (C) and noncorrosive to IEC 60754-2 (FRNC)
- Cables are metal free; hence, there are no ground-loop or potential-equalization problems. Completely dry design (without gel)
- Colour of outer sheath: OM1, OM2 – orange; OM3, OM4 – turquoise; OS2 – yellow

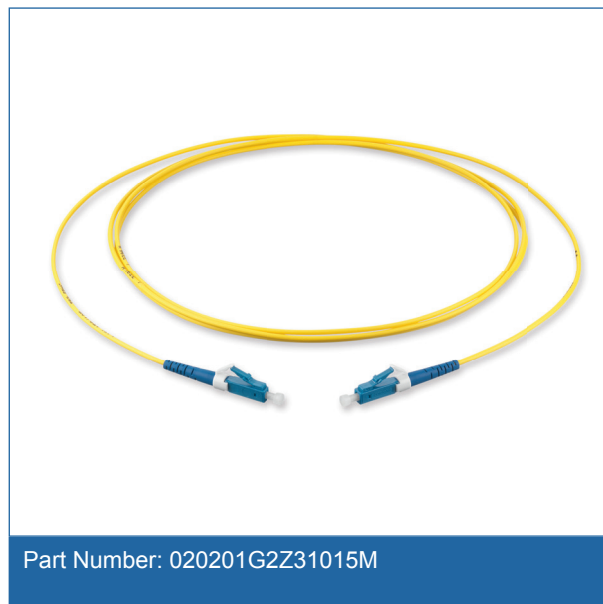

## Standards

**Intermateability** TIA/EIA-604-10 / TIA/EIA-604-10

## Specifications

General Specifications	
Flame rating	LSZH™/FRNC
Cable assembly type	Single Fibre
Fibre Category	SMF-28® Ultra fibre

Temperature Range	
Operation	-10 °C to 60 °C
Installation and assembly	-5 °C to 50 °C
Storage	-10 °C to 60 °C

# LC to LC Patch cord, 1 fibre, tight-buffered cable, LSZH, 2.0 mm legs

E9/125 SMF-28® ULTRA TB, 15 m

CORNING

## Design - Connector A

Connector type	LC
Ferrule Material	Ceramic
Polish	UPC
Housing material	Composite
Housing Colour	Blue
Boot type	Individual
Boot colour	Blue
Keyed (security)	No

## Mechanical Specifications - Connector A

Durability	≤ 0.2 dB 500 rematings, FOTP-21
Tensile strength jacketed cable	44 N

## Optical Specifications - Connector A

Insertion loss, typical	0.1 dB
Insertion loss, max.	0.3 dB
Reflectance, typical	≤ -58 dB

## Design - Connector B

Connector type	LC
Ferrule Material	Ceramic
Polish	UPC
Housing material	Composite
Housing Colour	Blue
Boot type	Individual
Boot colour	Blue
Keyed (security)	No

## Mechanical Specifications - Connector B

Durability	≤ 0.2 dB 500 rematings, FOTP-21
Tensile strength jacketed cable	44 N

# LC to LC Patch cord, 1 fibre, tight-buffered cable, LSZH, 2.0 mm legs

E9/125 SMF-28® ULTRA TB, 15 m

CORNING

## Optical Specifications - Connector B

Insertion loss, typical	0.1 dB
Insertion loss, max.	0.3 dB
Reflectance, typical	≤ -58 dB

## Cable Design

Fibre Count	1
Outer diameter	2 mm
Outer jacket colour	Yellow
Outer jacket material	LSZH™/FRNC
Minimum Bend Radius	10 mm
Crush resistance (reversible)	1000 N/10 cm
Tensile strength	150 N

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	-----------------------------------------------------------

## Fibre Specifications

### Optical Characteristics (cabled)

Fibre name	SMF-28® Ultra TB Cable Optical Fibre
Mode-Field Diameter at 1310 nm	9.2 µm
Fibre code	G
Coating diameter	242 µm
Cladding diameter	125 µm
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum attenuation	0.38 dB/km / 0.38 dB/km / 0.25 dB/km
Serial 1 gigabit ethernet	5000 m / -
Serial 10 gigabit ethernet	10000 m / 40000 m
Cable cutoff wavelength	1260 nm
Dispersion in the range 1285 to 1330 nm	≤ 3.5 ps / (nm * km)
Dispersion @ 1550 nm	≤ 18 ps / (nm * km)
PMD Link Design Value	≤ 0.04 PS / √km
PMD maximum individual fibre	≤ 0.1 PS / √km
Fibre compliance	ITU-T G.652.D and ITU-T G.657.A1

Notes: 1) Contact a Corning Customer Care Representative for additional information

# LC to LC Patch cord, 1 fibre, tight-buffered cable, LSZH, 2.0 mm legs

E9/125 SMF-28® ULTRA TB, 15 m

CORNING

## Fibre Specifications

Optical Characteristics (cabled)	
PMD maximum individual fibre	$\leq 0.1 \text{ PS} / \sqrt{\text{km}}$
Fibre compliance	ITU-T G.652.D and ITU-T G.657.A1

Notes: 1) Contact a Corning Customer Care Representative for additional information

## Ordering Information

Part Number	020201G2Z31015M
Product Description	LC to LC patch cord on single-fibre cable, with an outer diameter of 2 mm and a low-smoke, zero-halogen sheath. Length is variable.
Length	15 m
Weight	0.07 kg

## Shipping Information

Packing type	Cardboard box
Packing dimensions (L x W x H)	380 mm x 250 mm x 180 mm
Units Per Delivery	1/1



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY

00 800 2676 4641 · FAX: +49 30 5303 2335 · [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified.

© 2017 Corning Optical Communications. All rights reserved.

CORNING