

ALTOS® Low-Temperature, Loose Tube, Gel-Free Cable

24 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

Corning ALTOS® gel-free, low-temperature cables are designed for extreme cold temperature environments with an extended operating range of -50° to +70°C (-58° to +158°F). Dielectric jackets allow for duct or aerial (lashed) installation.

Features and Benefits

Extended operating temperature range of -50° to +70°C (-58° to +158°F)

Allows for operation at extreme low temperatures

Flexible, craft-friendly buffer tubes


Facilitate easy routing in closures

Gel-free waterblocking technology

Craft-friendly cable preparation

Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

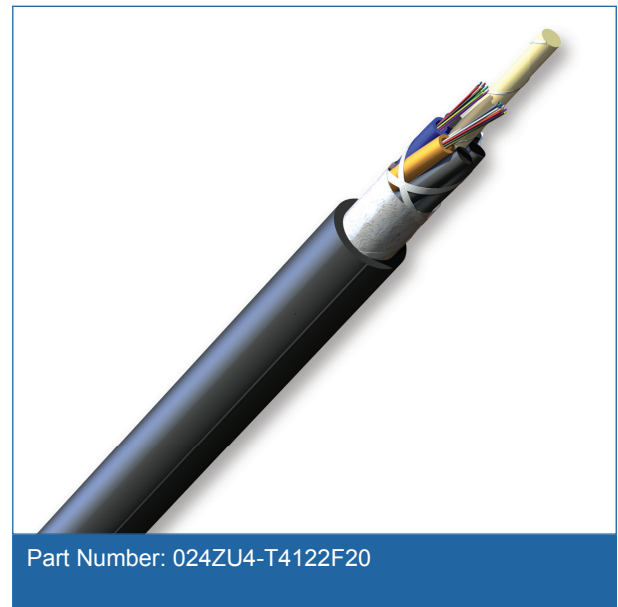


Standards

Approvals and Listings USDA Rural Development Programs

Common Installations Outdoor duct and aerial

Design and Test Criteria Telcordia GR-20, ICEA-640

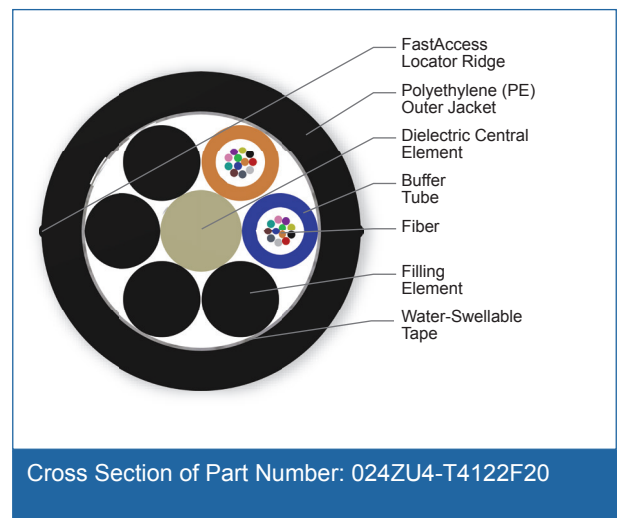

Specifications

General Specifications	
Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube

CORNING

ALTOS® Low-Temperature, Loose Tube, Gel-Free Cable

24 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

General Specifications

Product Type	Dielectric
Fiber Category	SMF-28® Ultra fiber

Temperature Range

Storage	-50 °C to 70 °C (-58 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-50 °C to 70 °C (-58 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	24
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	2
Number of Filling Elements	4
Buffer Tube Color Coding	Blue, Orange
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellable
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	73 kg/km (49 lb/1000 ft)
Nominal Outer Diameter	10.5 mm (0.41 in)
Min. Bend Radius Installation	158 mm (6.2 in)
Min. Bend Radius Operation	105 mm (4.1 in)

ALTOS[®] Low-Temperature, Loose Tube, Gel-Free Cable

24 F, SMF-28[®] Ultra fiber, Single-mode (OS2)



Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	SMF-28 [®] Ultra fiber
Fiber Category	G.652.D/G.657.A1
Fiber Code	Z
Performance Option Code	22
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.34 dB/km / 0.34 dB/km / 0.22 dB/km
Typical Attenuation*	0.32 dB/km / 0.32 dB/km / 0.18 dB/km

* For more information on typical attenuation please see the Corning whitepaper at http://csmedia.corning.com/opcomm//Resource_Documents/whitepapers_r/ LAN-1863-AEN.pdf

Ordering Information

Part Number	024ZU4-T4122F20
Product Description	ALTOS [®] Low-Temperature, Loose Tube, Gel-Free Cable, 24 F, SMF-28 [®] Ultra fiber, Single-mode (OS2)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

